
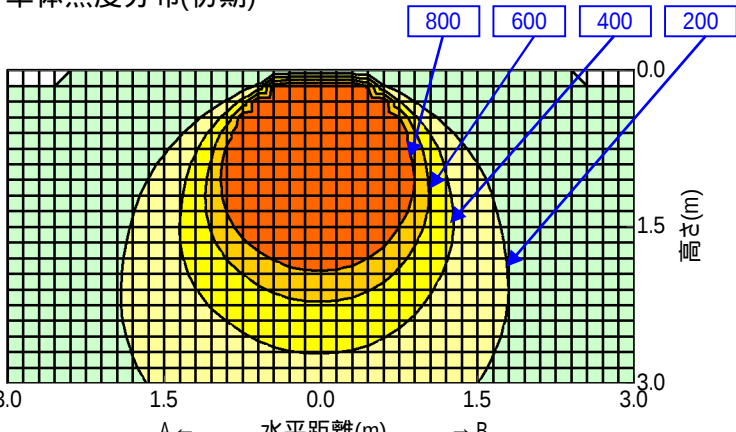
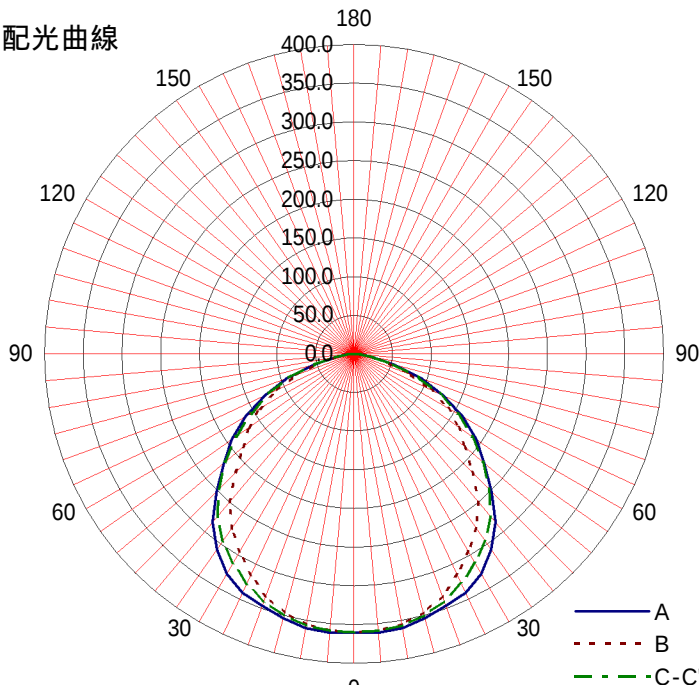


日立照明器具 照明特性

形式: TE45401L-JZ14 <定格出力タイプ> <電球色相当> <照度補正、連続調光共用形>		天井	80%			70%				50%			30%			0%	
		壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%	
		床	10%														0%
		室指数	照明率 S/H=1.0														
	姿図		0.6	0.59	0.48	0.40	0.58	0.47	0.40	0.35	0.46	0.39	0.35	0.45	0.39	0.34	0.33
			0.8	0.69	0.58	0.51	0.68	0.57	0.50	0.45	0.56	0.50	0.45	0.55	0.49	0.44	0.42
			1	0.76	0.65	0.58	0.74	0.65	0.58	0.52	0.63	0.57	0.52	0.62	0.56	0.52	0.49
			1.25	0.82	0.72	0.65	0.80	0.71	0.65	0.60	0.70	0.64	0.59	0.68	0.63	0.59	0.57
			1.5	0.86	0.78	0.71	0.84	0.77	0.71	0.66	0.75	0.70	0.65	0.73	0.68	0.65	0.62
			2	0.92	0.85	0.79	0.90	0.84	0.78	0.74	0.82	0.77	0.73	0.80	0.76	0.73	0.70
			2.5	0.95	0.89	0.84	0.93	0.88	0.83	0.79	0.86	0.82	0.78	0.84	0.80	0.77	0.75
			3	0.97	0.92	0.87	0.95	0.91	0.87	0.83	0.89	0.85	0.82	0.87	0.84	0.81	0.78
光源		4	1.00	0.96	0.92	0.98	0.95	0.91	0.88	0.92	0.90	0.87	0.90	0.88	0.86	0.83	
品名	LED	5	1.02	0.98	0.95	1.00	0.97	0.94	0.92	0.95	0.93	0.90	0.93	0.91	0.89	0.86	
形式		7	1.04	1.02	0.99	1.03	1.01	0.98	0.97	0.98	0.97	0.95	0.96	0.95	0.93	0.91	
光束	8,150 lm	10	1.06	1.04	1.03	1.04	1.03	1.02	1.00	1.01	1.00	0.99	0.99	0.98	0.97	0.94	

器具効率 Ft= 100.0%															
上方光束 Fu= 0.0%															
下方光束 Fd= 100.0%															
配光分類															
BZ-															
最大取付間隔															
A-A 1.36 H															
B-B 1.24 H															
保守率	良	0.81													
	中	0.77													
	否	0.68													
光度 (cd/1000 lm)															
	A-0	B-B						C-0	A'-0	C'-0					
0	360	360						360							
10	360	355						356							
20	347	333						340							
30	329	296	312												
40	284	250	274												
50	219	187	218												
60	163	141	154												
70	92	79	89												
80	24	23	25												
90															
100															
110															
120															
130															
140															
150															
160															
170															
180															