
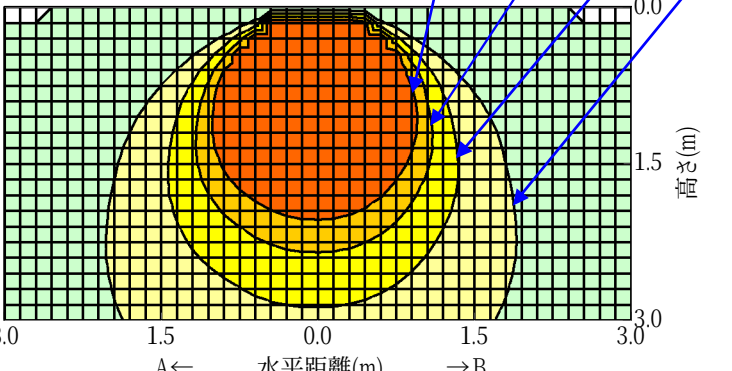
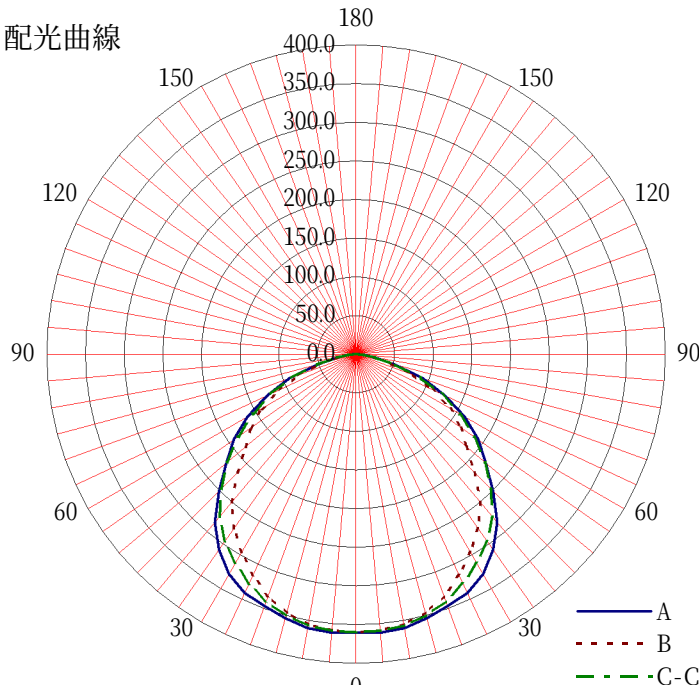


日立照明器具 照明特性

形式: TE45401N-JZ14		反 射 率	天井	80%			70%				50%			30%			0%
<定格出力タイプ> <昼白色相当> <照度補正、連続調光共用形>			壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%
			床	10%													
		室指数	照明率 S/H=1.0														
姿図 		0.6	0.59	0.48	0.40	0.58	0.47	0.40	0.35	0.46	0.39	0.35	0.45	0.39	0.34	0.33	
		0.8	0.69	0.58	0.51	0.68	0.57	0.50	0.45	0.56	0.50	0.45	0.55	0.49	0.44	0.42	
		1	0.76	0.65	0.58	0.74	0.65	0.58	0.52	0.63	0.57	0.52	0.62	0.56	0.52	0.49	
		1.25	0.82	0.72	0.65	0.80	0.71	0.65	0.60	0.70	0.64	0.59	0.68	0.63	0.59	0.57	
		1.5	0.86	0.78	0.71	0.84	0.77	0.71	0.66	0.75	0.70	0.65	0.73	0.68	0.65	0.62	
		2	0.92	0.85	0.79	0.90	0.84	0.78	0.74	0.82	0.77	0.73	0.80	0.76	0.73	0.70	
		2.5	0.95	0.89	0.84	0.93	0.88	0.83	0.79	0.86	0.82	0.78	0.84	0.80	0.77	0.75	
		3	0.97	0.92	0.87	0.95	0.91	0.87	0.83	0.89	0.85	0.82	0.87	0.84	0.81	0.78	
光 源		4	1.00	0.96	0.92	0.98	0.95	0.91	0.88	0.92	0.90	0.87	0.90	0.88	0.86	0.83	
品名	LED	5	1.02	0.98	0.95	1.00	0.97	0.94	0.92	0.95	0.93	0.90	0.93	0.91	0.89	0.86	
形式		7	1.04	1.02	0.99	1.03	1.01	0.98	0.97	0.98	0.97	0.95	0.96	0.95	0.93	0.91	
光束	9,150 lm	10	1.06	1.04	1.03	1.04	1.03	1.02	1.00	1.01	1.00	0.99	0.99	0.98	0.97	0.94	

器具効率 Ft= 100.0%			単体照度分布(初期) 				
上方光束 Fu= 0.0%							
下方光束 Fd= 100.0%							
配光分類							
BZ-							
最大取付間隔							
A-A 1.36 H							
B-B 1.24 H							
保守率	良	0.81					
	中	0.77					
	否	0.68					
光度 (cd/1000 lm)							
	A-0	B-B	C-0	A'-0	C'-0		
0	360	360	360				
10	360	355	356				
20	347	333	340				
30	329	296	312				
40	284	250	274				
50	219	187	218				
60	163	141	154				
70	92	79	89				
80	24	23	25				
90							
100							
110							
120							
130							
140							
150							
160							
170							
180							

配光曲線				
				
— A - - - B - · - C-C'				