
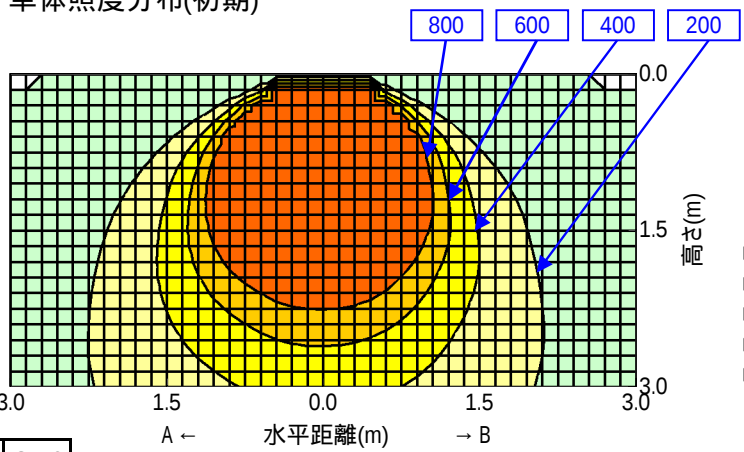
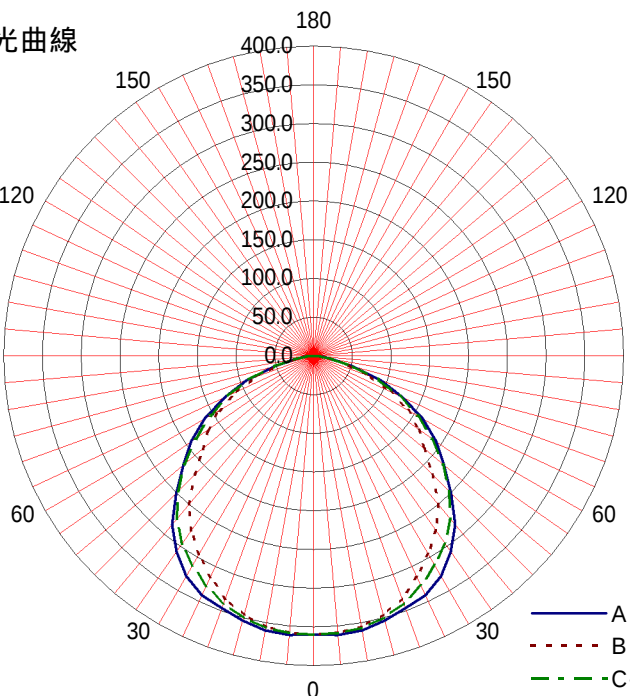
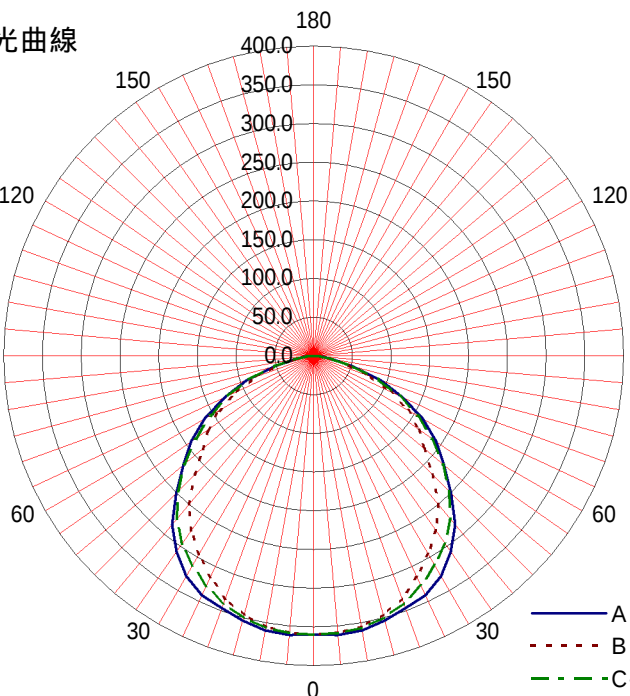


日立照明器具 照明特性

形式: TE45401WW-JZU14A		反 射 率	天井	80%			70%				50%			30%			0%		
<高出力タイプ>			壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%		
<温白色相当>			床	10%															0%
<初期照度補正、連続調光共用形>			室指数	照明率 S/H=1.0															
姿図 		0.6	0.59	0.48	0.40	0.58	0.47	0.40	0.35	0.46	0.39	0.35	0.45	0.39	0.34	0.33			
		0.8	0.69	0.58	0.51	0.68	0.57	0.50	0.45	0.56	0.50	0.45	0.55	0.49	0.44	0.42			
		1	0.76	0.65	0.58	0.74	0.65	0.58	0.52	0.63	0.57	0.52	0.62	0.56	0.52	0.49			
		1.25	0.82	0.72	0.65	0.80	0.71	0.65	0.60	0.70	0.64	0.59	0.68	0.63	0.59	0.57			
		1.5	0.86	0.78	0.71	0.84	0.77	0.71	0.66	0.75	0.70	0.65	0.73	0.68	0.65	0.62			
		2	0.92	0.85	0.79	0.90	0.84	0.78	0.74	0.82	0.77	0.73	0.80	0.76	0.73	0.70			
		2.5	0.95	0.89	0.84	0.93	0.88	0.83	0.79	0.86	0.82	0.78	0.84	0.80	0.77	0.75			
		3	0.97	0.92	0.87	0.95	0.91	0.87	0.83	0.89	0.85	0.82	0.87	0.84	0.81	0.78			
光源		4	1.00	0.96	0.92	0.98	0.95	0.91	0.88	0.92	0.90	0.87	0.90	0.88	0.86	0.83			
品名	LED	5	1.02	0.98	0.95	1.00	0.97	0.94	0.92	0.95	0.93	0.90	0.93	0.91	0.89	0.86			
形式		7	1.04	1.02	0.99	1.03	1.01	0.98	0.97	0.98	0.97	0.95	0.96	0.95	0.93	0.91			
光束	11,310 lm	10	1.06	1.04	1.03	1.04	1.03	1.02	1.00	1.01	1.00	0.99	0.99	0.98	0.97	0.94			

器具効率 Ft= 100.0%			単体照度分布(初期)  800600400200 0.01.53.0 3.01.50.01.53.0 A ← 水平距離(m) → B 0-200 200-400 400-600 600-800 800-1000 (m) 高さ																	
上方光束 Fu= 0.0%																				
下方光束 Fd= 100.0%																				
配光分類																				
BZ-																				
最大取付間隔			配光曲線  1801501209060300 400.0350.0300.0250.0200.0150.0100.050.00.0 01801501209060300 A B C-C'																	
A-A 1.36 H																				
B-B 1.24 H																				
保守率	良	0.86																		
	中	0.81																		
	否	0.72																		
光度 (cd/1000 lm)			配光曲線  1801501209060300 400.0350.0300.0250.0200.0150.0100.050.00.0 01801501209060300 A B C-C'																	
	A-0	B-B																C-0	A'-0	C'-0
0	360	360																360		
10	360	355																356		
20	347	333																340		
30	329	296																312		
40	284	250																274		
50	219	187																218		
60	163	141																154		
70	92	79																89		
80	24	23																25		
90																				
100																				
110																				
120																				
130																				
140																				
150																				
160																				
170																				
180																				