

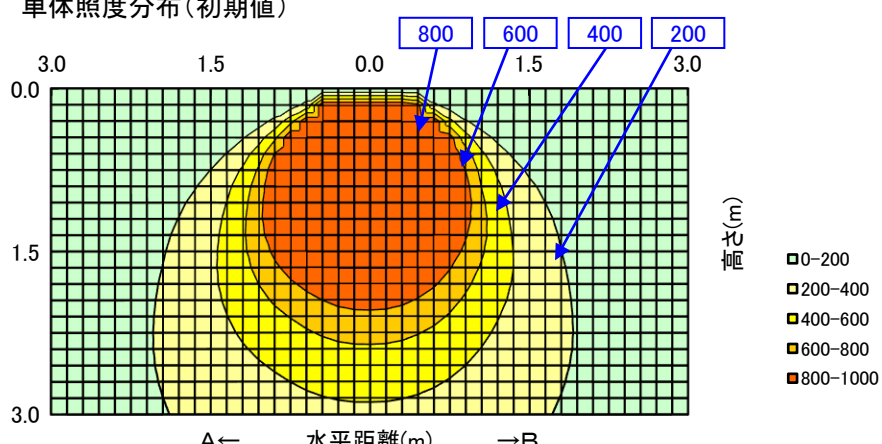


日立照明器具 照明特性

名称: 一体形LEDベース (スクエアタイプ)	反射率	天井	80%			70%				50%			30%			0%
		壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%
		床	10%													0%
形式: TE454AN-JZ14A	室指数	固有照明率 S/H=1.0														
〈備考〉	0.6	0.59	0.48	0.40	0.58	0.47	0.40	0.35	0.46	0.39	0.35	0.45	0.39	0.34	0.33	
	0.8	0.69	0.58	0.50	0.68	0.57	0.50	0.45	0.56	0.50	0.45	0.55	0.49	0.44	0.42	
姿図 	1	0.76	0.65	0.58	0.74	0.65	0.58	0.52	0.63	0.57	0.52	0.61	0.56	0.52	0.49	
	1.25	0.82	0.72	0.65	0.80	0.71	0.65	0.60	0.70	0.64	0.59	0.68	0.63	0.59	0.57	
	1.5	0.86	0.78	0.71	0.84	0.77	0.71	0.66	0.75	0.70	0.65	0.73	0.68	0.65	0.62	
	2	0.92	0.85	0.79	0.90	0.84	0.78	0.74	0.82	0.77	0.73	0.80	0.76	0.73	0.70	
	2.5	0.95	0.89	0.84	0.93	0.88	0.83	0.79	0.86	0.82	0.78	0.84	0.80	0.77	0.75	
	3	0.97	0.92	0.87	0.95	0.91	0.87	0.83	0.89	0.85	0.82	0.87	0.84	0.81	0.78	
光源形式 -	4	1.00	0.96	0.92	0.98	0.95	0.91	0.88	0.92	0.90	0.87	0.90	0.88	0.86	0.83	
	5	1.02	0.98	0.95	1.00	0.97	0.94	0.92	0.95	0.93	0.90	0.93	0.91	0.89	0.86	
器具光束 9,260 lm	7	1.04	1.02	0.99	1.03	1.00	0.98	0.97	0.98	0.97	0.95	0.96	0.95	0.93	0.91	
	10	1.06	1.04	1.03	1.04	1.03	1.02	1.00	1.01	1.00	0.99	0.99	0.98	0.97	0.94	
器具効率 Ft= 100%		単体照度分布(初期値) 														
上方光束 Fu= 0%																
下方光束 Fd= 100%																
最大取付間隔																
A-A 1.36 H																
B-B 1.24 H																
保守率	良															0.86
	中	0.81														
	否	0.72														
光度 (cd/1000 lm)		A-0	B-B	C-0	A'-0	C'-0	配光曲線 (cd/1000 lm) 									
0	360	360	360													
10	360	355	356													
20	347	333	340													
30	329	296	312													
40	284	250	274													
50	219	187	218													
60	163	141	154													
70	92	79	89													
80	24	23	25													
90																
100																
110																
120																
130																
140																
150																
160																
170																
180																

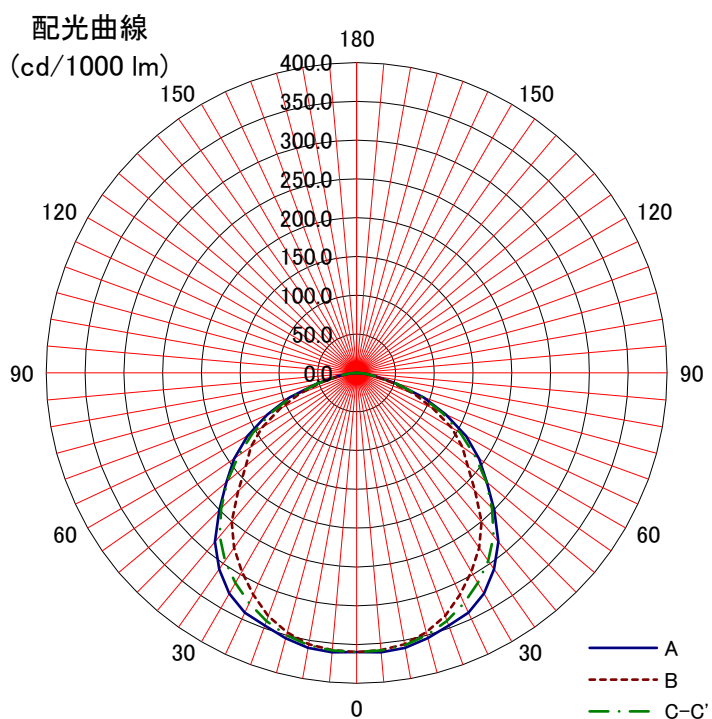