


日立照明器具 照明特性


名称: 一体形LEDベース (スクエアタイプ)	反 射 率	天井	80%			70%				50%			30%			0%	
		壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%	
		床	10%														0%
		室指数	固有照明率 S/H=1.0														
形式: TE454AN-JZL14A																	
<備考>	0.6	0.59	0.48	0.40	0.58	0.47	0.40	0.35	0.46	0.39	0.35	0.45	0.39	0.34	0.33		
	0.8	0.69	0.58	0.50	0.68	0.57	0.50	0.45	0.56	0.50	0.45	0.55	0.49	0.44	0.42		
姿図 	1	0.76	0.65	0.58	0.74	0.65	0.58	0.52	0.63	0.57	0.52	0.61	0.56	0.52	0.49		
	1.25	0.82	0.72	0.65	0.80	0.71	0.65	0.60	0.70	0.64	0.59	0.68	0.63	0.59	0.57		
	1.5	0.86	0.78	0.71	0.84	0.77	0.71	0.66	0.75	0.70	0.65	0.73	0.68	0.65	0.62		
	2	0.92	0.85	0.79	0.90	0.84	0.78	0.74	0.82	0.77	0.73	0.80	0.76	0.73	0.70		
	2.5	0.95	0.89	0.84	0.93	0.88	0.83	0.79	0.86	0.82	0.78	0.84	0.80	0.77	0.75		
	3	0.97	0.92	0.87	0.95	0.91	0.87	0.83	0.89	0.85	0.82	0.87	0.84	0.81	0.78		
	4	1.00	0.96	0.92	0.98	0.95	0.91	0.88	0.92	0.90	0.87	0.90	0.88	0.86	0.83		
光源形式 -	5	1.02	0.98	0.95	1.00	0.97	0.94	0.92	0.95	0.93	0.90	0.93	0.91	0.89	0.86		
器具光束 6,200 lm	7	1.04	1.02	0.99	1.03	1.00	0.98	0.97	0.98	0.97	0.95	0.96	0.95	0.93	0.91		
	10	1.06	1.04	1.03	1.04	1.03	1.02	1.00	1.01	1.00	0.99	0.99	0.98	0.97	0.94		

器具効率 Ft= 100%
 上方光束 Fu= 0%
 下方光束 Fd= 100%

最大取付間隔		
A-A	1.36	H
B-B	1.24	H
保守率	良	0.86
	中	0.81
	否	0.72

光度 (cd/1000 lm)					
	A-0	B-B	C-0	A'-0	C'-0
0	360	360	360		
10	360	355	356		
20	347	333	340		
30	329	296	312		
40	284	250	274		
50	219	187	218		
60	163	141	154		
70	92	79	89		
80	24	23	25		
90					
100					
110					
120					
130					
140					
150					
160					
170					
180					

単体照度分布(初期値)

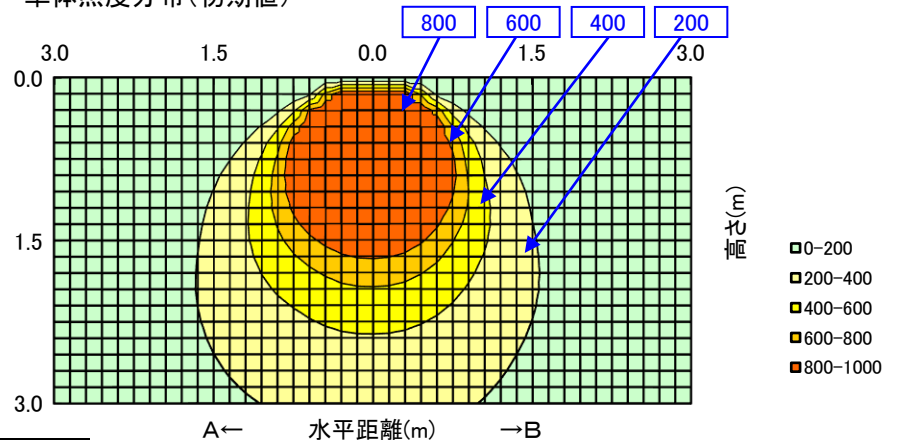

配光曲線
(cd/1000 lm)

