
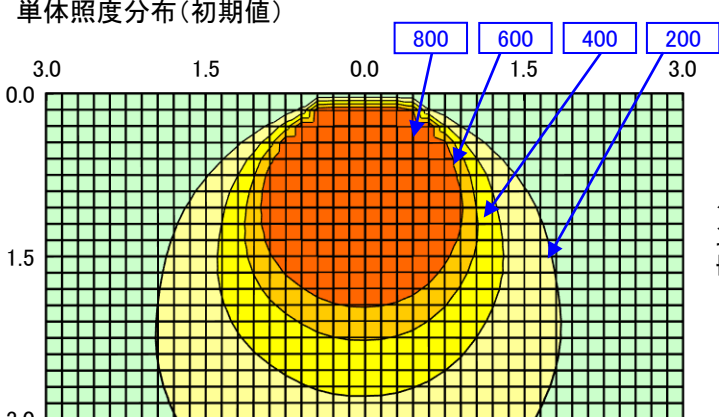
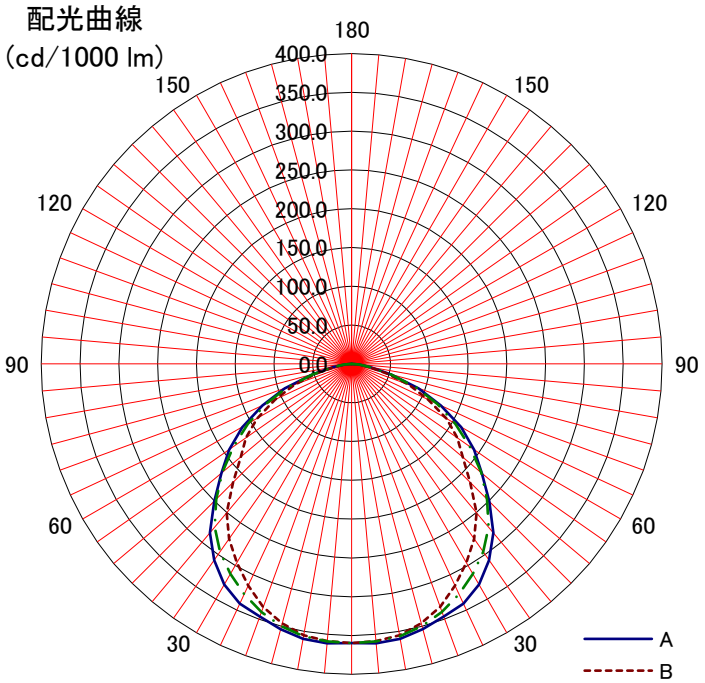


日立照明器具 照明特性

名称: 一体形LEDベース (スクエアタイプ)	反射率	天井	80%			70%				50%			30%			0%																																																																																																																												
		壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%																																																																																																																												
		床	10%														0%																																																																																																																											
形式: TE454AW-JZ14A	室指数	固有照明率 S/H=1.0																																																																																																																																										
<備考>	0.6	0.59	0.48	0.40	0.58	0.47	0.40	0.35	0.46	0.39	0.35	0.45	0.39	0.34	0.33																																																																																																																													
	0.8	0.69	0.58	0.50	0.68	0.57	0.50	0.45	0.56	0.50	0.45	0.55	0.49	0.44	0.42																																																																																																																													
姿図 	1	0.76	0.65	0.58	0.74	0.65	0.58	0.52	0.63	0.57	0.52	0.61	0.56	0.52	0.49																																																																																																																													
	1.25	0.82	0.72	0.65	0.80	0.71	0.65	0.60	0.70	0.64	0.59	0.68	0.63	0.59	0.57																																																																																																																													
	1.5	0.86	0.78	0.71	0.84	0.77	0.71	0.66	0.75	0.70	0.65	0.73	0.68	0.65	0.62																																																																																																																													
	2	0.92	0.85	0.79	0.90	0.84	0.78	0.74	0.82	0.77	0.73	0.80	0.76	0.73	0.70																																																																																																																													
	2.5	0.95	0.89	0.84	0.93	0.88	0.83	0.79	0.86	0.82	0.78	0.84	0.80	0.77	0.75																																																																																																																													
	3	0.97	0.92	0.87	0.95	0.91	0.87	0.83	0.89	0.85	0.82	0.87	0.84	0.81	0.78																																																																																																																													
光源形式 -	4	1.00	0.96	0.92	0.98	0.95	0.91	0.88	0.92	0.90	0.87	0.90	0.88	0.86	0.83																																																																																																																													
	5	1.02	0.98	0.95	1.00	0.97	0.94	0.92	0.95	0.93	0.90	0.93	0.91	0.89	0.86																																																																																																																													
器具光束 8,620 lm	7	1.04	1.02	0.99	1.03	1.00	0.98	0.97	0.98	0.97	0.95	0.96	0.95	0.93	0.91																																																																																																																													
	10	1.06	1.04	1.03	1.04	1.03	1.02	1.00	1.01	1.00	0.99	0.99	0.98	0.97	0.94																																																																																																																													
器具効率 Ft= 100%		単体照度分布 (初期値) 																																																																																																																																										
上方光束 Fu= 0%																																																																																																																																												
下方光束 Fd= 100%																																																																																																																																												
最大取付間隔		配光曲線 (cd/1000 lm) 																																																																																																																																										
A-A 1.36 H																																																																																																																																												
B-B 1.24 H																																																																																																																																												
保守率																																																																																																																																												
良	0.86	<table><tr><th colspan="5">光度 (cd/1000 lm)</th></tr><tr><th></th><th>A-0</th><th>B-B</th><th>C-0</th><th>A'-0</th><th>C'-0</th></tr><tr><td>0</td><td>360</td><td>360</td><td>360</td><td></td><td></td></tr><tr><td>10</td><td>360</td><td>355</td><td>356</td><td></td><td></td></tr><tr><td>20</td><td>347</td><td>333</td><td>340</td><td></td><td></td></tr><tr><td>30</td><td>329</td><td>296</td><td>312</td><td></td><td></td></tr><tr><td>40</td><td>284</td><td>250</td><td>274</td><td></td><td></td></tr><tr><td>50</td><td>219</td><td>187</td><td>218</td><td></td><td></td></tr><tr><td>60</td><td>163</td><td>141</td><td>154</td><td></td><td></td></tr><tr><td>70</td><td>92</td><td>79</td><td>89</td><td></td><td></td></tr><tr><td>80</td><td>24</td><td>23</td><td>25</td><td></td><td></td></tr><tr><td>90</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>100</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>110</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>120</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>130</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>140</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>150</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>160</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>170</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>180</td><td></td><td></td><td></td><td></td><td></td></tr></table>														光度 (cd/1000 lm)						A-0	B-B	C-0	A'-0	C'-0	0	360	360	360			10	360	355	356			20	347	333	340			30	329	296	312			40	284	250	274			50	219	187	218			60	163	141	154			70	92	79	89			80	24	23	25			90						100						110						120						130						140						150						160						170						180					
光度 (cd/1000 lm)																																																																																																																																												
	A-0															B-B	C-0	A'-0	C'-0																																																																																																																									
0	360															360	360																																																																																																																											
10	360															355	356																																																																																																																											
20	347															333	340																																																																																																																											
30	329															296	312																																																																																																																											
40	284															250	274																																																																																																																											
50	219															187	218																																																																																																																											
60	163															141	154																																																																																																																											
70	92	79	89																																																																																																																																									
80	24	23	25																																																																																																																																									
90																																																																																																																																												
100																																																																																																																																												
110																																																																																																																																												
120																																																																																																																																												
130																																																																																																																																												
140																																																																																																																																												
150																																																																																																																																												
160																																																																																																																																												
170																																																																																																																																												
180																																																																																																																																												
中	0.81																																																																																																																																											
否	0.72																																																																																																																																											