

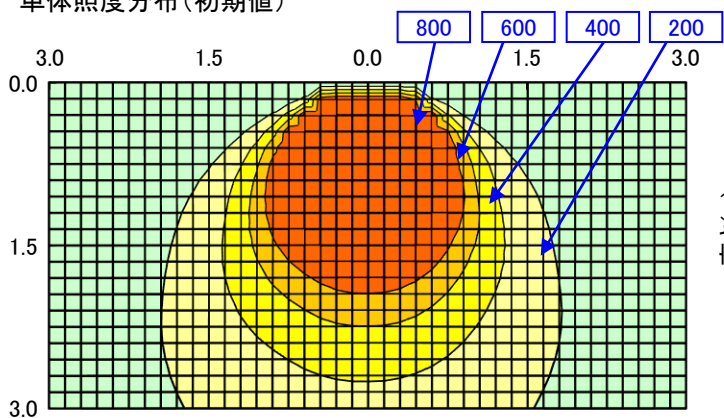


日立照明器具 照明特性

名称: 一体形LEDベース (スクエアタイプ)	反射率	天井	80%			70%				50%			30%			0%			
		壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%			
		床	10%														0%		
形式: TE454AWW-JZ14A	室指数	固有照明率 S/H=1.0																	
<備考>	0.6	0.59	0.48	0.40	0.58	0.47	0.40	0.35	0.46	0.39	0.35	0.45	0.39	0.34	0.33				
	0.8	0.69	0.58	0.50	0.68	0.57	0.50	0.45	0.56	0.50	0.45	0.55	0.49	0.44	0.42				
姿図 	1	0.76	0.65	0.58	0.74	0.65	0.58	0.52	0.63	0.57	0.52	0.61	0.56	0.52	0.49				
	1.25	0.82	0.72	0.65	0.80	0.71	0.65	0.60	0.70	0.64	0.59	0.68	0.63	0.59	0.57				
	1.5	0.86	0.78	0.71	0.84	0.77	0.71	0.66	0.75	0.70	0.65	0.73	0.68	0.65	0.62				
	2	0.92	0.85	0.79	0.90	0.84	0.78	0.74	0.82	0.77	0.73	0.80	0.76	0.73	0.70				
	2.5	0.95	0.89	0.84	0.93	0.88	0.83	0.79	0.86	0.82	0.78	0.84	0.80	0.77	0.75				
	3	0.97	0.92	0.87	0.95	0.91	0.87	0.83	0.89	0.85	0.82	0.87	0.84	0.81	0.78				
光源形式 -	4	1.00	0.96	0.92	0.98	0.95	0.91	0.88	0.92	0.90	0.87	0.90	0.88	0.86	0.83				
	5	1.02	0.98	0.95	1.00	0.97	0.94	0.92	0.95	0.93	0.90	0.93	0.91	0.89	0.86				
器具光束 8,420 lm	7	1.04	1.02	0.99	1.03	1.00	0.98	0.97	0.98	0.97	0.95	0.96	0.95	0.93	0.91				
	10	1.06	1.04	1.03	1.04	1.03	1.02	1.00	1.01	1.00	0.99	0.99	0.98	0.97	0.94				
器具効率 Ft= 100%		単体照度分布(初期値)  0-200 200-400 400-600 600-800 800-1000																	
上方光束 Fu= 0%																			
下方光束 Fd= 100%																			
最大取付間隔																			
A-A 1.36 H																			
B-B 1.24 H																			
保守率	良	0.86																	
	中	0.81																	
	否	0.72																	
光度 (cd/1000 lm)		配光曲線 (cd/1000 lm)  A B C-C'																	
	A-0															B-B	C-0	A'-0	C'-0
0	360															360	360		
10	360															355	356		
20	347															333	340		
30	329															296	312		
40	284															250	274		
50	219															187	218		
60	163															141	154		
70	92															79	89		
80	24															23	25		
90																			
100																			
110																			
120																			
130																			
140																			
150																			
160																			
170																			
180																			

配光曲線
(cd/1000 lm)

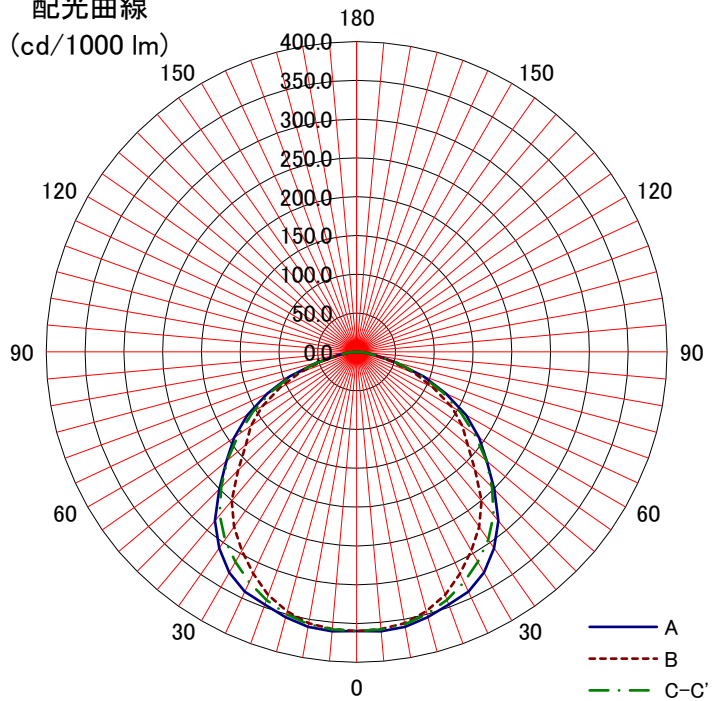