
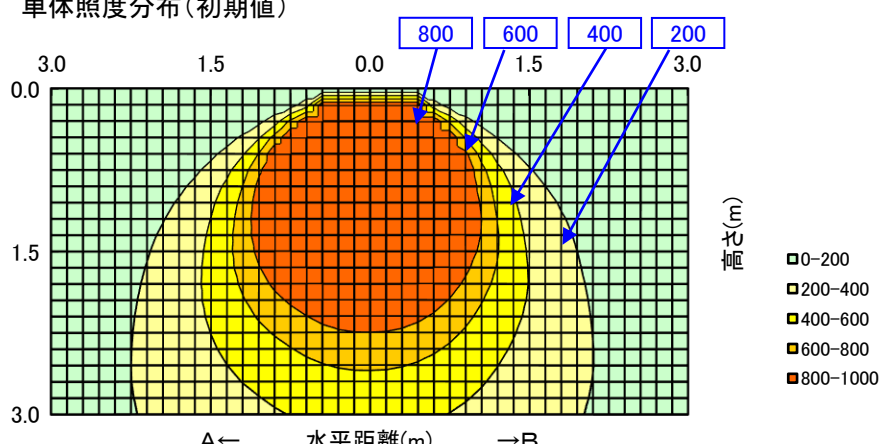
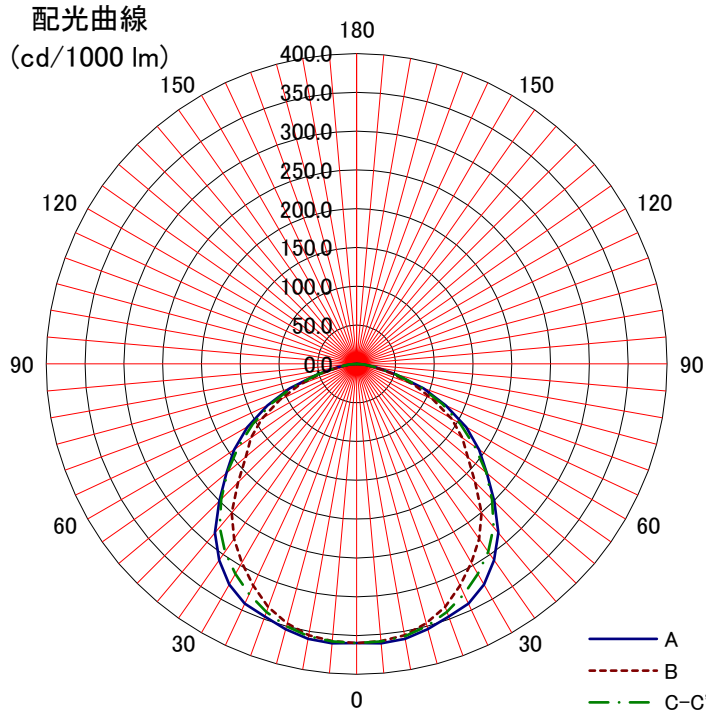


日立照明器具 照明特性

名称: 一体形LEDベース (スクエアタイプ)	反射率	天井	80%			70%				50%			30%			0%
		壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%
		床	10%													
形式: TE454AWW-JZU14A	室指数	固有照明率 S/H=1.0														
〈備考〉	0.6	0.59	0.48	0.40	0.58	0.47	0.40	0.35	0.46	0.39	0.35	0.45	0.39	0.34	0.33	
	0.8	0.69	0.58	0.50	0.68	0.57	0.50	0.45	0.56	0.50	0.45	0.55	0.49	0.44	0.42	
姿図 	1	0.76	0.65	0.58	0.74	0.65	0.58	0.52	0.63	0.57	0.52	0.61	0.56	0.52	0.49	
	1.25	0.82	0.72	0.65	0.80	0.71	0.65	0.60	0.70	0.64	0.59	0.68	0.63	0.59	0.57	
	1.5	0.86	0.78	0.71	0.84	0.77	0.71	0.66	0.75	0.70	0.65	0.73	0.68	0.65	0.62	
	2	0.92	0.85	0.79	0.90	0.84	0.78	0.74	0.82	0.77	0.73	0.80	0.76	0.73	0.70	
	2.5	0.95	0.89	0.84	0.93	0.88	0.83	0.79	0.86	0.82	0.78	0.84	0.80	0.77	0.75	
	3	0.97	0.92	0.87	0.95	0.91	0.87	0.83	0.89	0.85	0.82	0.87	0.84	0.81	0.78	
	4	1.00	0.96	0.92	0.98	0.95	0.91	0.88	0.92	0.90	0.87	0.90	0.88	0.86	0.83	
光源形式 -	5	1.02	0.98	0.95	1.00	0.97	0.94	0.92	0.95	0.93	0.90	0.93	0.91	0.89	0.86	
	器具光束 11,240 lm	7	1.04	1.02	0.99	1.03	1.00	0.98	0.97	0.98	0.97	0.95	0.96	0.95	0.93	0.91
	10	1.06	1.04	1.03	1.04	1.03	1.02	1.00	1.01	1.00	0.99	0.99	0.98	0.97	0.94	
器具効率 Ft= 100%		単体照度分布(初期値) 														
上方光束 Fu= 0%																
下方光束 Fd= 100%																
最大取付間隔																
A-A 1.36 H																
B-B 1.24 H																
保守率	良															0.86
	中	0.81														
	否	0.72														
光度 (cd/1000 lm)		A-0	B-B	C-0	A'-0	C'-0	配光曲線 (cd/1000 lm) 									
	0	360	360	360												
	10	360	355	356												
	20	347	333	340												
	30	329	296	312												
	40	284	250	274												
	50	219	187	218												
	60	163	141	154												
	70	92	79	89												
	80	24	23	25												
	90															
	100															
	110															
	120															
	130															
	140															
	150															
	160															
	170															
	180															