



# 日立照明器具 照明特性

|                                                                                                 |          |             |      |             |      |      |      |      |      |      |      |      |      |      |      |      |    |    |
|-------------------------------------------------------------------------------------------------|----------|-------------|------|-------------|------|------|------|------|------|------|------|------|------|------|------|------|----|----|
| 形式: TLE32401D-JZ14A                                                                             |          | 反<br>射<br>率 | 天井   | 80%         |      |      | 70%  |      |      |      | 50%  |      |      | 30%  |      |      | 0% |    |
| <定格出力タイプ>                                                                                       |          |             | 壁    | 70%         | 50%  | 30%  | 70%  | 50%  | 30%  | 10%  | 50%  | 30%  | 10%  | 50%  | 30%  | 10%  | 0% |    |
| <昼光色相当>                                                                                         |          |             | 床    | 10%         |      |      |      |      |      |      |      |      |      |      |      |      |    | 0% |
| <初期照度補正、連続調光共用形>                                                                                |          |             | 室指数  | 照明率 S/H=1.0 |      |      |      |      |      |      |      |      |      |      |      |      |    |    |
| <div>姿図</div>  |          | 0.6         | 0.61 | 0.50        | 0.43 | 0.60 | 0.49 | 0.42 | 0.38 | 0.48 | 0.42 | 0.37 | 0.47 | 0.42 | 0.37 | 0.36 |    |    |
|                                                                                                 |          | 0.8         | 0.71 | 0.60        | 0.53 | 0.70 | 0.60 | 0.53 | 0.48 | 0.59 | 0.52 | 0.48 | 0.57 | 0.52 | 0.47 | 0.46 |    |    |
|                                                                                                 |          | 1           | 0.77 | 0.68        | 0.61 | 0.76 | 0.67 | 0.60 | 0.55 | 0.65 | 0.60 | 0.55 | 0.64 | 0.59 | 0.55 | 0.53 |    |    |
|                                                                                                 |          | 1.25        | 0.83 | 0.74        | 0.68 | 0.82 | 0.74 | 0.67 | 0.63 | 0.72 | 0.66 | 0.62 | 0.70 | 0.66 | 0.62 | 0.59 |    |    |
|                                                                                                 |          | 1.5         | 0.87 | 0.80        | 0.74 | 0.86 | 0.79 | 0.73 | 0.68 | 0.77 | 0.72 | 0.68 | 0.75 | 0.71 | 0.67 | 0.65 |    |    |
|                                                                                                 |          | 2           | 0.93 | 0.86        | 0.81 | 0.91 | 0.85 | 0.80 | 0.76 | 0.83 | 0.79 | 0.76 | 0.82 | 0.78 | 0.75 | 0.72 |    |    |
|                                                                                                 |          | 2.5         | 0.96 | 0.90        | 0.86 | 0.94 | 0.89 | 0.85 | 0.81 | 0.87 | 0.83 | 0.80 | 0.85 | 0.82 | 0.79 | 0.77 |    |    |
|                                                                                                 |          | 3           | 0.98 | 0.93        | 0.89 | 0.96 | 0.92 | 0.88 | 0.85 | 0.90 | 0.86 | 0.84 | 0.88 | 0.85 | 0.82 | 0.80 |    |    |
| 光源                                                                                              |          | 4           | 1.00 | 0.96        | 0.93 | 0.99 | 0.95 | 0.92 | 0.89 | 0.93 | 0.91 | 0.88 | 0.91 | 0.89 | 0.87 | 0.84 |    |    |
| 品名                                                                                              | LED      | 5           | 1.02 | 0.99        | 0.96 | 1.01 | 0.98 | 0.95 | 0.93 | 0.96 | 0.93 | 0.91 | 0.94 | 0.92 | 0.90 | 0.87 |    |    |
| 形式                                                                                              |          | 7           | 1.04 | 1.02        | 1.00 | 1.03 | 1.01 | 0.99 | 0.97 | 0.99 | 0.97 | 0.96 | 0.97 | 0.95 | 0.94 | 0.91 |    |    |
| 光束                                                                                              | 5,820 lm | 10          | 1.06 | 1.05        | 1.03 | 1.05 | 1.03 | 1.02 | 1.01 | 1.01 | 1.00 | 0.99 | 0.99 | 0.98 | 0.97 | 0.95 |    |    |

|          |                            |
|----------|----------------------------|
| 器具効率 Ft= | 100.0%                     |
| 上方光束 Fu= | 0.0%                       |
| 下方光束 Fd= | 100.0%                     |
| 配光分類     | BZ-                        |
| 最大取付間隔   |                            |
| A-A      | 1.30 H                     |
| B-B      | 1.16 H                     |
| 保守率      | 良 0.86<br>中 0.81<br>否 0.72 |

単体照度分布(初期)

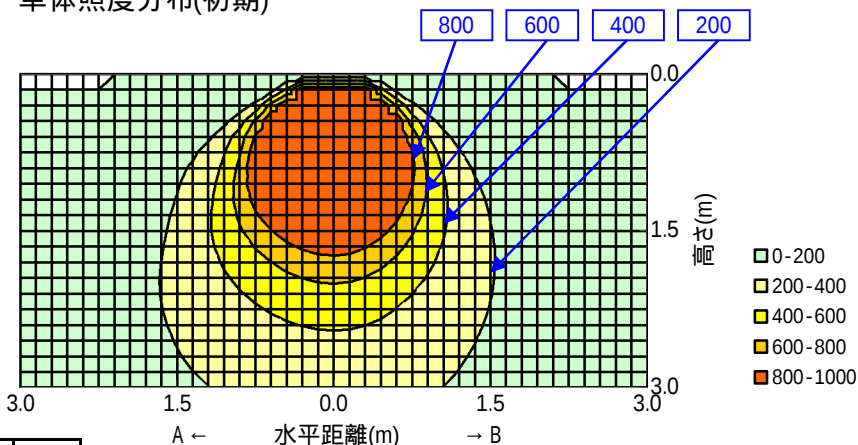

| 光度 (cd/1000 lm) | A-0 | B-B | C-0 | A'-0 | C'-0 |
|-----------------|-----|-----|-----|------|------|
| 0               | 413 | 413 | 413 |      |      |
| 10              | 406 | 400 | 401 |      |      |
| 20              | 387 | 363 | 372 |      |      |
| 30              | 359 | 316 | 333 |      |      |
| 40              | 304 | 258 | 282 |      |      |
| 50              | 215 | 191 | 212 |      |      |
| 60              | 156 | 125 | 135 |      |      |
| 70              | 63  | 64  | 66  |      |      |
| 80              | 19  | 23  | 21  |      |      |
| 90              |     |     |     |      |      |
| 100             |     |     |     |      |      |
| 110             |     |     |     |      |      |
| 120             |     |     |     |      |      |
| 130             |     |     |     |      |      |
| 140             |     |     |     |      |      |
| 150             |     |     |     |      |      |
| 160             |     |     |     |      |      |
| 170             |     |     |     |      |      |
| 180             |     |     |     |      |      |

配光曲線

