



日立照明器具 照明特性

形式: TLE32401N-JZ14A		天井 壁 床 室指数	80%			70%				50%			30%			0%	
<定格出力タイプ>			70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%	
<昼白色相当>			10%														0%
<初期照度補正、連続調光共用形>			照明率 S/H=1.0														
姿図 		0.6	0.61	0.50	0.43	0.60	0.49	0.42	0.38	0.48	0.42	0.37	0.47	0.42	0.37	0.36	
		0.8	0.71	0.60	0.53	0.70	0.60	0.53	0.48	0.59	0.52	0.48	0.57	0.52	0.47	0.46	
		1	0.77	0.68	0.61	0.76	0.67	0.60	0.55	0.65	0.60	0.55	0.64	0.59	0.55	0.53	
		1.25	0.83	0.74	0.68	0.82	0.74	0.67	0.63	0.72	0.66	0.62	0.70	0.66	0.62	0.59	
		1.5	0.87	0.80	0.74	0.86	0.79	0.73	0.68	0.77	0.72	0.68	0.75	0.71	0.67	0.65	
		2	0.93	0.86	0.81	0.91	0.85	0.80	0.76	0.83	0.79	0.76	0.82	0.78	0.75	0.72	
		2.5	0.96	0.90	0.86	0.94	0.89	0.85	0.81	0.87	0.83	0.80	0.85	0.82	0.79	0.77	
		3	0.98	0.93	0.89	0.96	0.92	0.88	0.85	0.90	0.86	0.84	0.88	0.85	0.82	0.80	
		4	1.00	0.96	0.93	0.99	0.95	0.92	0.89	0.93	0.91	0.88	0.91	0.89	0.87	0.84	
		5	1.02	0.99	0.96	1.01	0.98	0.95	0.93	0.96	0.93	0.91	0.94	0.92	0.90	0.87	
品名	LED	7	1.04	1.02	1.00	1.03	1.01	0.99	0.97	0.99	0.97	0.96	0.97	0.95	0.94	0.91	
形式		10	1.06	1.05	1.03	1.05	1.03	1.02	1.01	1.01	1.00	0.99	0.99	0.98	0.97	0.95	
光束	6,010 lm																

器具効率 Ft= 100.0%					
上方光束 Fu= 0.0%					
下方光束 Fd= 100.0%					
配光分類					
BZ-					
最大取付間隔					
A-A		1.30	H		
B-B		1.16	H		
保守率	良	0.86			
	中	0.81			
	否	0.72			
光度 (cd/1000 lm)					
	A-0	B-B	C-0	A'-0	C'-0
0	413	413	413		
10	406	400	401		
20	387	363	372		
30	359	316	333		
40	304	258	282		
50	215	191	212		
60	156	125	135		
70	63	64	66		
80	19	23	21		
90					
100					
110					
120					
130					
140					
150					
160					
170					
180					

単体照度分布(初期)

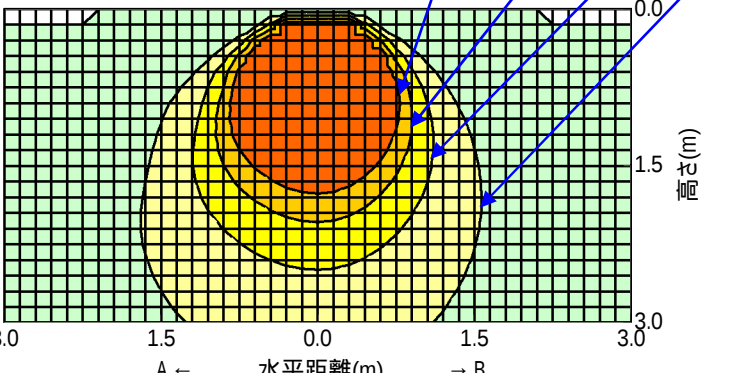

800 600 400 200

0.0 1.5 3.0


3.0 1.5 0.0 1.5 3.0

A ← 水平距離(m) → B

高さ(m)

0-200
200-400
400-600
600-800
800-1000

配光曲線

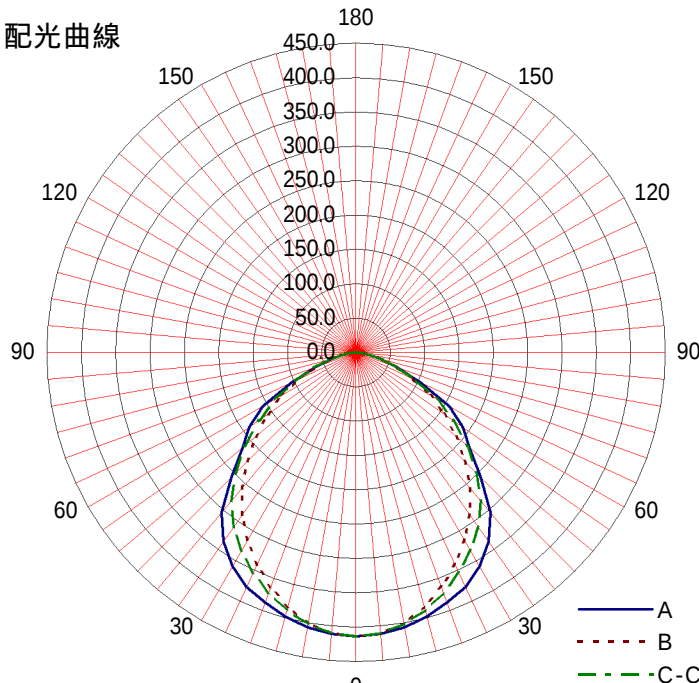

180 150 120 90 60 30 0

450.0 400.0 350.0 300.0 250.0 200.0 150.0 100.0 50.0 0.0

A B C-C'