
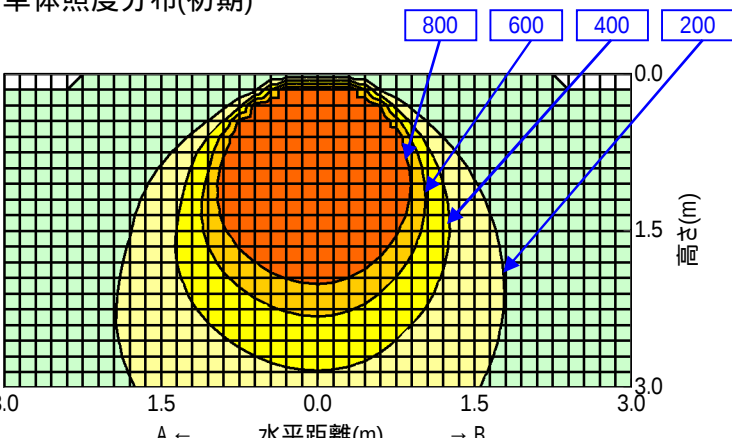
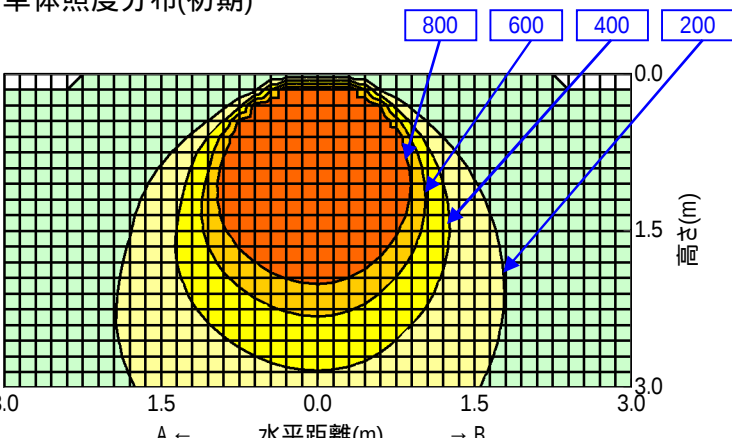


日立照明器具 照明特性

形式：TLE32401N-JZU14 <高出力タイプ> <昼白色相当> <照度補正、連続調光共用形>		天井	80%			70%				50%			30%			0%	
		壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%	
		床	10%														0%
		室指数	照明率 S/H=1.0														
	姿図	0.6	0.61	0.50	0.43	0.60	0.49	0.42	0.38	0.48	0.42	0.37	0.47	0.42	0.37	0.36	
	0.8	0.71	0.60	0.53	0.70	0.60	0.53	0.48	0.59	0.52	0.48	0.57	0.52	0.47	0.46		
	1	0.77	0.68	0.61	0.76	0.67	0.60	0.55	0.65	0.60	0.55	0.64	0.59	0.55	0.53		
	1.25	0.83	0.74	0.68	0.82	0.74	0.67	0.63	0.72	0.66	0.62	0.70	0.66	0.62	0.59		
	1.5	0.87	0.80	0.74	0.86	0.79	0.73	0.68	0.77	0.72	0.68	0.75	0.71	0.67	0.65		
	2	0.93	0.86	0.81	0.91	0.85	0.80	0.76	0.83	0.79	0.76	0.82	0.78	0.75	0.72		
	2.5	0.96	0.90	0.86	0.94	0.89	0.85	0.81	0.87	0.83	0.80	0.85	0.82	0.79	0.77		
	3	0.98	0.93	0.89	0.96	0.92	0.88	0.85	0.90	0.86	0.84	0.88	0.85	0.82	0.80		
光源		4	1.00	0.96	0.93	0.99	0.95	0.92	0.89	0.93	0.91	0.88	0.91	0.89	0.87	0.84	
品名	LED	5	1.02	0.99	0.96	1.01	0.98	0.95	0.93	0.96	0.93	0.91	0.94	0.92	0.90	0.87	
形式		7	1.04	1.02	1.00	1.03	1.01	0.99	0.97	0.99	0.97	0.96	0.97	0.95	0.94	0.91	
光束	7,790 lm	10	1.06	1.05	1.03	1.05	1.03	1.02	1.01	1.01	1.00	0.99	0.99	0.98	0.97	0.95	

器具効率 Ft= 100.0%			単体照度分布(初期) 							
上方光束 Fu= 0.0%										
下方光束 Fd= 100.0%										
配光分類										
BZ-										
最大取付間隔			照度 (lx) 0.0 1.5 3.0 水平距離(m) A ← → B							
A-A 1.30 H										
B-B 1.16 H										
保守率	良	0.81	配光曲線 							
	中	0.77								
	否	0.68								
光度 (cd/1000 lm)			照度 (lx) 0.0 50.0 100.0 150.0 200.0 250.0 300.0 350.0 400.0 450.0 角度 (度) 0 30 60 90 120 150 180 A B C-C'							
	A-0	B-B						C-0	A'-0	C'-0
0	413	413						413		
10	406	400						401		
20	387	363						372		
30	359	316						333		
40	304	258						282		
50	215	191						212		
60	156	125						135		
70	63	64						66		
80	19	23						21		
90										
100										
110										
120										
130										
140										
150										
160										
170										
180										