
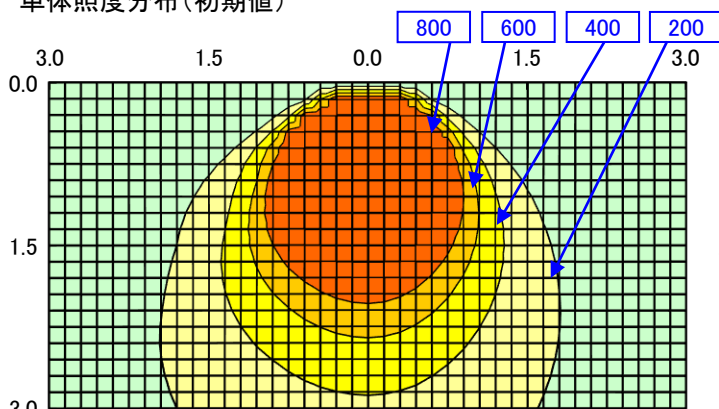
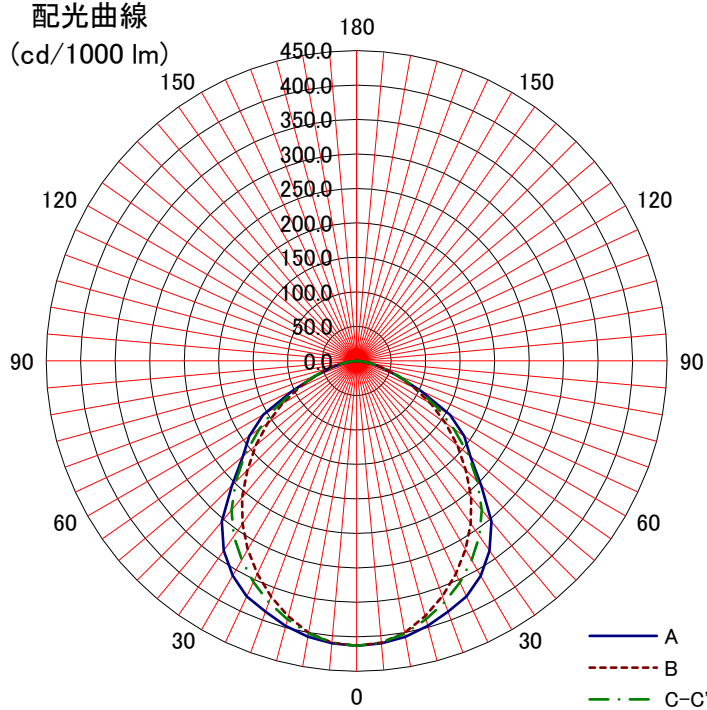


日立照明器具 照明特性

名称: 一体形LEDベース (スクエアタイプ)	反射率	天井	80%			70%				50%			30%			0%
		壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%
		床	10%													
形式: TLE324AN-JZU14A	室指数	固有照明率 S/H=1.0														
〈備考〉	0.6	0.61	0.50	0.43	0.60	0.49	0.42	0.38	0.48	0.42	0.37	0.47	0.42	0.37	0.36	
	0.8	0.71	0.60	0.53	0.70	0.60	0.53	0.48	0.59	0.52	0.48	0.57	0.52	0.47	0.46	
姿図 	1	0.77	0.68	0.61	0.76	0.67	0.60	0.55	0.65	0.60	0.55	0.64	0.59	0.55	0.53	
	1.25	0.83	0.74	0.68	0.82	0.74	0.67	0.63	0.72	0.66	0.62	0.70	0.66	0.62	0.59	
	1.5	0.87	0.80	0.74	0.86	0.79	0.73	0.68	0.77	0.72	0.68	0.75	0.71	0.67	0.65	
	2	0.93	0.86	0.81	0.91	0.85	0.80	0.76	0.83	0.79	0.76	0.82	0.78	0.75	0.72	
	2.5	0.96	0.90	0.86	0.94	0.89	0.85	0.81	0.87	0.83	0.80	0.85	0.82	0.79	0.77	
	3	0.98	0.93	0.89	0.96	0.92	0.88	0.85	0.90	0.86	0.84	0.88	0.85	0.82	0.80	
	4	1.00	0.96	0.93	0.99	0.95	0.92	0.89	0.93	0.91	0.88	0.91	0.89	0.87	0.84	
光源形式 -	5	1.02	0.99	0.96	1.01	0.98	0.95	0.93	0.96	0.93	0.91	0.94	0.92	0.90	0.87	
器具光束 8,030 lm	7	1.04	1.02	1.00	1.03	1.01	0.99	0.97	0.99	0.97	0.96	0.97	0.95	0.94	0.91	
	10	1.06	1.05	1.03	1.05	1.03	1.02	1.01	1.01	1.00	0.99	0.99	0.98	0.97	0.95	
器具効率 Ft= 100%		単体照度分布(初期値) 														
上方光束 Fu= 0%																
下方光束 Fd= 100%																
最大取付間隔		(E) ルクス ■ 0-200 ■ 200-400 ■ 400-600 ■ 600-800 ■ 800-1000														
A-A 1.30 H																
B-B 1.16 H																
保守率	良	0.86	配光曲線 (cd/1000 lm) 													
	中	0.81														
	否	0.72														
光度 (cd/1000 lm)																
	A-0	B-B	C-0	A'-0	C'-0											
0	413	413	413													
10	406	400	401													
20	387	363	372													
30	359	316	333													
40	304	258	282													
50	215	191	212													
60	156	125	135													
70	63	64	66													
80	19	23	21													
90																
100																
110																
120																
130																
140																
150																
160																
170																
180																