
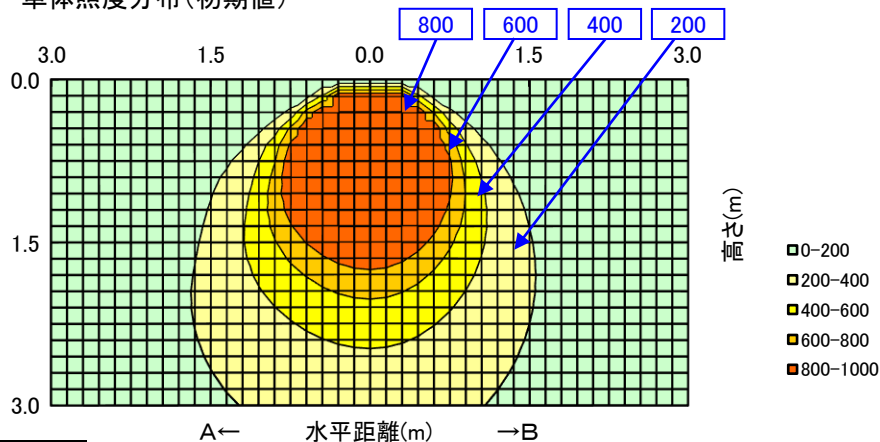
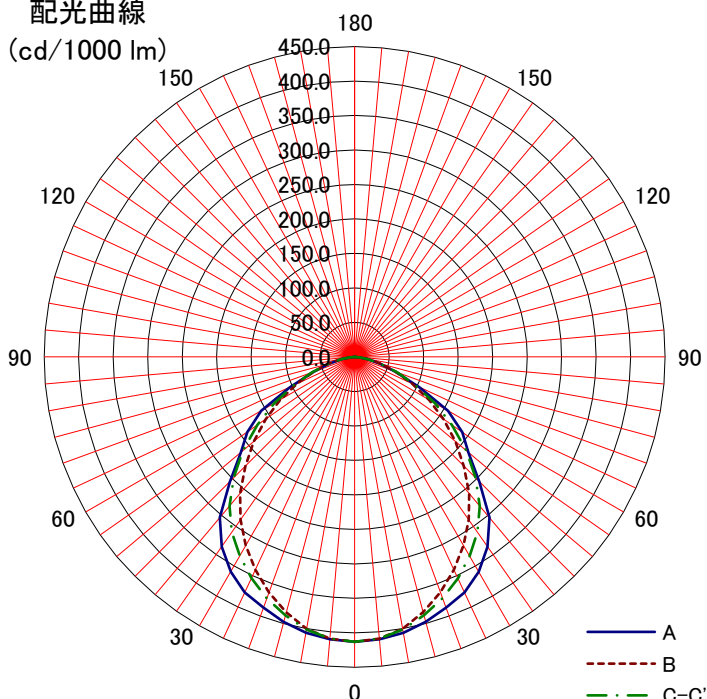


日立照明器具 照明特性

名称: 一体形LEDベース (スクエアタイプ)	反射率	天井	80%				70%				50%			30%			0%
		壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%	
		床	10%														0%
形式: TLE324AW-JZ14A	室指数	固有照明率 S/H=1.0															
〈備考〉	0.6	0.61	0.50	0.43	0.60	0.49	0.42	0.38	0.48	0.42	0.37	0.47	0.42	0.37	0.36		
	0.8	0.71	0.60	0.53	0.70	0.60	0.53	0.48	0.59	0.52	0.48	0.57	0.52	0.47	0.46		
姿図 	1	0.77	0.68	0.61	0.76	0.67	0.60	0.55	0.65	0.60	0.55	0.64	0.59	0.55	0.53		
	1.25	0.83	0.74	0.68	0.82	0.74	0.67	0.63	0.72	0.66	0.62	0.70	0.66	0.62	0.59		
	1.5	0.87	0.80	0.74	0.86	0.79	0.73	0.68	0.77	0.72	0.68	0.75	0.71	0.67	0.65		
	2	0.93	0.86	0.81	0.91	0.85	0.80	0.76	0.83	0.79	0.76	0.82	0.78	0.75	0.72		
	2.5	0.96	0.90	0.86	0.94	0.89	0.85	0.81	0.87	0.83	0.80	0.85	0.82	0.79	0.77		
	3	0.98	0.93	0.89	0.96	0.92	0.88	0.85	0.90	0.86	0.84	0.88	0.85	0.82	0.80		
光源形式 -	4	1.00	0.96	0.93	0.99	0.95	0.92	0.89	0.93	0.91	0.88	0.91	0.89	0.87	0.84		
	5	1.02	0.99	0.96	1.01	0.98	0.95	0.93	0.96	0.93	0.91	0.94	0.92	0.90	0.87		
器具光束 5,940 lm	7	1.04	1.02	1.00	1.03	1.01	0.99	0.97	0.99	0.97	0.96	0.97	0.95	0.94	0.91		
	10	1.06	1.05	1.03	1.05	1.03	1.02	1.01	1.01	1.00	0.99	0.99	0.98	0.97	0.95		
器具効率 Ft= 100%		単体照度分布(初期値) 															
上方光束 Fu= 0%																	
下方光束 Fd= 100%																	
最大取付間隔																	
A-A 1.30 H																	
B-B 1.16 H																	
保守率	良															0.86	
	中															0.81	
	否															0.72	
光度 (cd/1000 lm)		配光曲線 (cd/1000 lm) 															
	A-0	B-B	C-0	A'-0	C'-0												
0	413	413	413														
10	406	400	401														
20	387	363	372														
30	359	316	333														
40	304	258	282														
50	215	191	212														
60	156	125	135														
70	63	64	66														
80	19	23	21														
90																	
100																	
110																	
120																	
130																	
140																	
150																	
160																	
170																	
180																	