
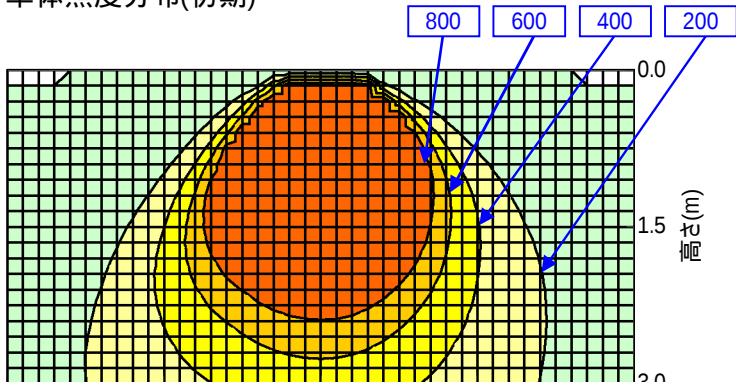
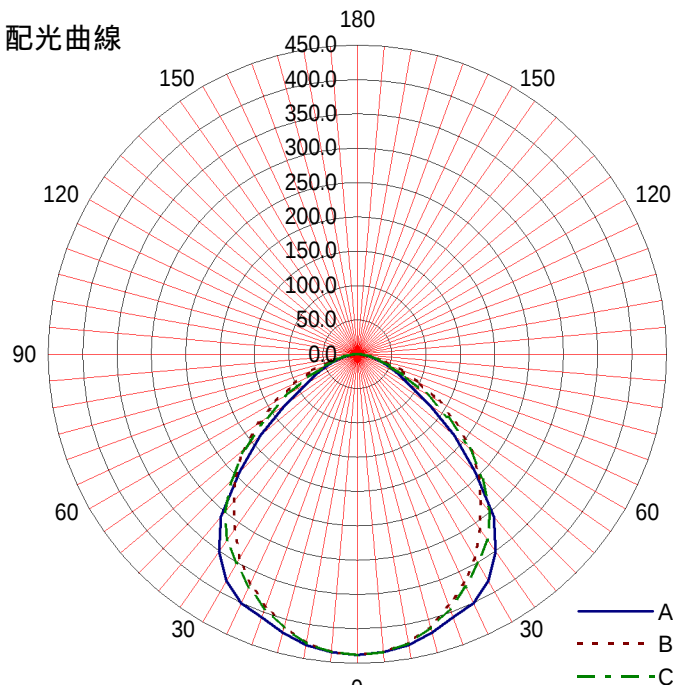


日立照明器具 照明特性

形式: TLE45401L-JZU14A		天井 反射率 壁 床 室指数	80%			70%				50%			30%			0%	
<高出力タイプ>			70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%	
<電球色相当>			10%														0%
<初期照度補正、連続調光共用形>			照明率 S/H=1.0														
姿図 		0.6	0.63	0.52	0.45	0.62	0.51	0.44	0.40	0.50	0.44	0.40	0.49	0.44	0.39	0.38	
		0.8	0.72	0.62	0.55	0.71	0.62	0.55	0.50	0.60	0.54	0.50	0.59	0.54	0.50	0.48	
		1	0.79	0.70	0.63	0.77	0.69	0.62	0.58	0.67	0.62	0.57	0.66	0.61	0.57	0.55	
		1.25	0.84	0.76	0.70	0.83	0.75	0.69	0.65	0.74	0.68	0.64	0.72	0.67	0.64	0.62	
		1.5	0.88	0.81	0.75	0.87	0.80	0.75	0.70	0.78	0.74	0.70	0.77	0.73	0.69	0.67	
		2	0.93	0.87	0.83	0.92	0.86	0.82	0.78	0.85	0.81	0.77	0.83	0.79	0.76	0.74	
		2.5	0.96	0.91	0.87	0.95	0.90	0.86	0.83	0.88	0.85	0.82	0.86	0.83	0.81	0.78	
		3	0.98	0.94	0.90	0.97	0.93	0.89	0.86	0.91	0.87	0.85	0.89	0.86	0.84	0.81	
		4	1.01	0.97	0.94	0.99	0.96	0.93	0.90	0.94	0.91	0.89	0.92	0.90	0.88	0.85	
		品名	LED	5	1.02	1.00	0.97	1.01	0.98	0.96	0.94	0.96	0.94	0.92	0.94	0.92	0.91
形式		7	1.05	1.03	1.01	1.03	1.01	1.00	0.98	0.99	0.98	0.96	0.97	0.96	0.95	0.92	
光束	10,420 lm	10	1.06	1.05	1.04	1.05	1.04	1.03	1.01	1.02	1.01	1.00	1.00	0.99	0.98	0.95	

器具効率 Ft= 100.0%			単体照度分布(初期)  800600400200 0.01.53.0 3.01.50.0 A ← 水平距離(m) → B 0-200 200-400 400-600 600-800 800-1000					
上方光束 Fu= 0.0%								
下方光束 Fd= 100.0%								
配光分類								
BZ-								
最大取付間隔			配光曲線  1801501209060300 450.0400.0350.0300.0250.0200.0150.0100.050.00.0 0306090120150180 A B C-C'					
A-A 1.30 H								
B-B 1.18 H								
保守率	良	0.86						
	中	0.81						
	否	0.72						
光度 (cd/1000 lm)								
	A-0	B-B	C-0	A'-0	C'-0			
0	438	438	438					
10	430	427	428					
20	408	390	394					
30	381	342	351					
40	308	280	300					
50	184	217	214					
60	85	137	116					
70	44	70	50					
80	18	22	20					
90								
100								
110								
120								
130								
140								
150								
160								
170								
180								