


日立照明器具 照明特性

形式：TLE45401W-JZ14 <定格出力タイプ> <白色相当> <照度補正、連続調光共用形>		天井	80%			70%				50%			30%			0%		
			壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%	
		反射率	床	10%														0%
			室指数	照明率 S/H=1.0														


姿図 	0.6	0.63	0.52	0.45	0.62	0.51	0.44	0.40	0.50	0.44	0.40	0.49	0.44	0.39	0.38
	0.8	0.72	0.62	0.55	0.71	0.62	0.55	0.50	0.60	0.54	0.50	0.59	0.54	0.50	0.48
	1	0.79	0.70	0.63	0.77	0.69	0.62	0.58	0.67	0.62	0.57	0.66	0.61	0.57	0.55
	1.25	0.84	0.76	0.70	0.83	0.75	0.69	0.65	0.74	0.68	0.64	0.72	0.67	0.64	0.62
	1.5	0.88	0.81	0.75	0.87	0.80	0.75	0.70	0.78	0.74	0.70	0.77	0.73	0.69	0.67
	2	0.93	0.87	0.83	0.92	0.86	0.82	0.78	0.85	0.81	0.77	0.83	0.79	0.76	0.74
	2.5	0.96	0.91	0.87	0.95	0.90	0.86	0.83	0.88	0.85	0.82	0.86	0.83	0.81	0.78
	3	0.98	0.94	0.90	0.97	0.93	0.89	0.86	0.91	0.87	0.85	0.89	0.86	0.84	0.81
	4	1.01	0.97	0.94	0.99	0.96	0.93	0.90	0.94	0.91	0.89	0.92	0.90	0.88	0.85

光源	LED	5	1.02	1.00	0.97	1.01	0.98	0.96	0.94	0.96	0.94	0.92	0.94	0.92	0.91	0.88
品名	LED	7	1.05	1.03	1.01	1.03	1.01	1.00	0.98	0.99	0.98	0.96	0.97	0.96	0.95	0.92
形式		10	1.06	1.05	1.04	1.05	1.04	1.03	1.01	1.02	1.01	1.00	1.00	0.99	0.98	0.95
光束	8,480 lm															

器具効率 Ft= 100.0%		
上方光束 Fu= 0.0%		
下方光束 Fd= 100.0%		
配光分類		
BZ-		
最大取付間隔		
A-A 1.30 H		
B-B 1.18 H		
保守率	良	0.81
	中	0.77
	否	0.68

光度 (cd/1000 lm)					
	A-0	B-B	C-0	A'-0	C'-0
0	438	438	438		
10	430	427	428		
20	408	390	394		
30	381	342	351		
40	308	280	300		
50	184	217	214		
60	85	137	116		
70	44	70	50		
80	18	22	20		
90					
100					
110					
120					
130					
140					
150					
160					
170					
180					

単体照度分布(初期)

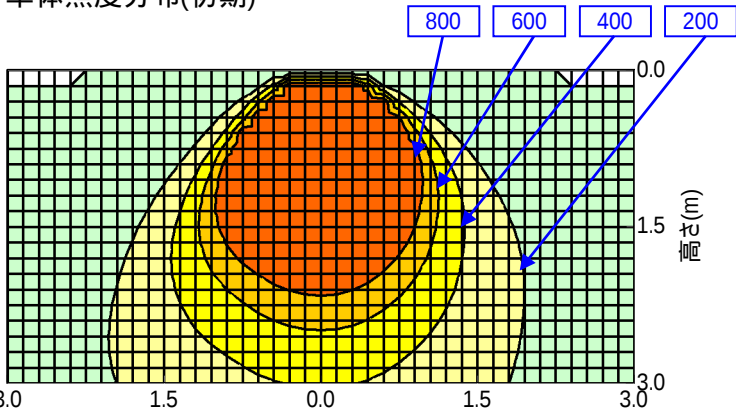


0.0
1.5
3.0
3.0 1.5 0.0 1.5 3.0
A ← 水平距離(m) → B

800 600 400 200

0-200
200-400
400-600
600-800
800-1000

配光曲線

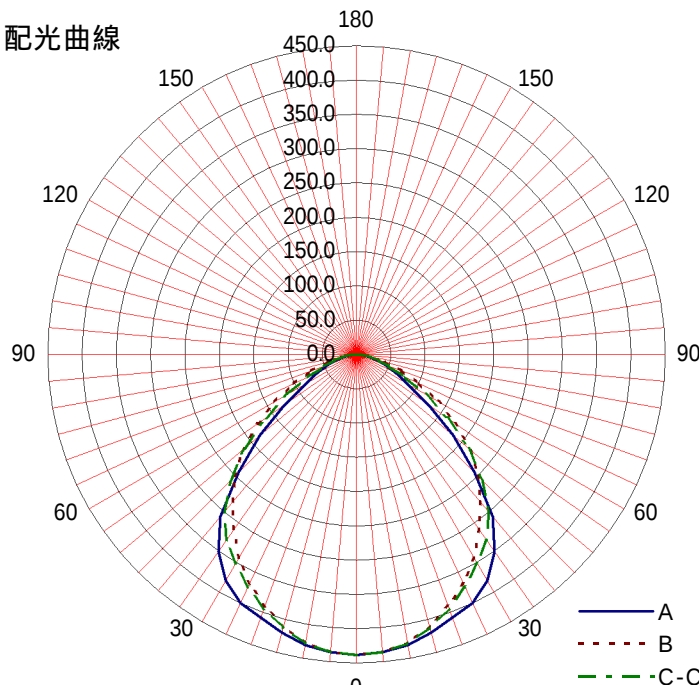

180
150
120
90
60
30
0

450.0
400.0
350.0
300.0
250.0
200.0
150.0
100.0
50.0
0.0

A
B
C-C'