

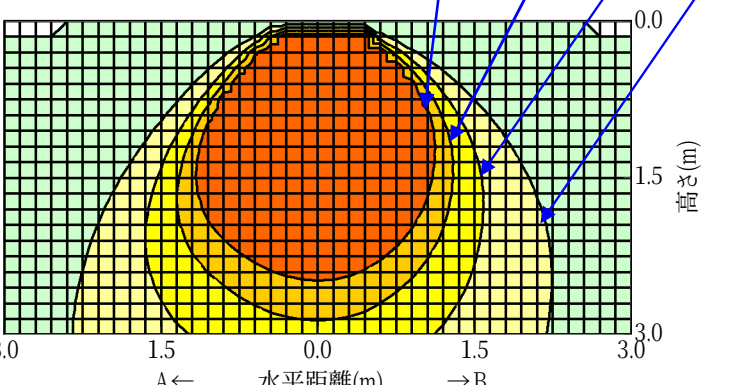
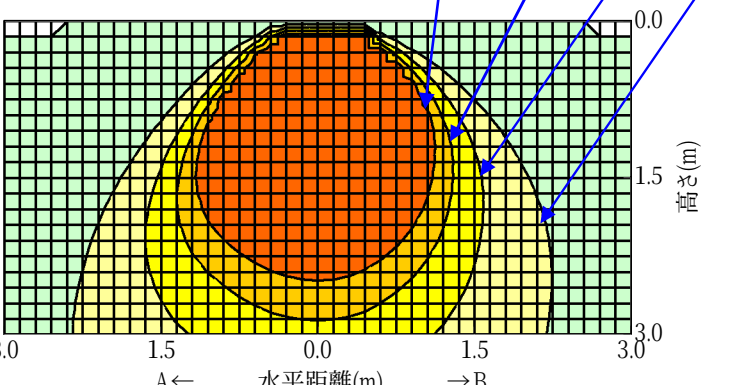
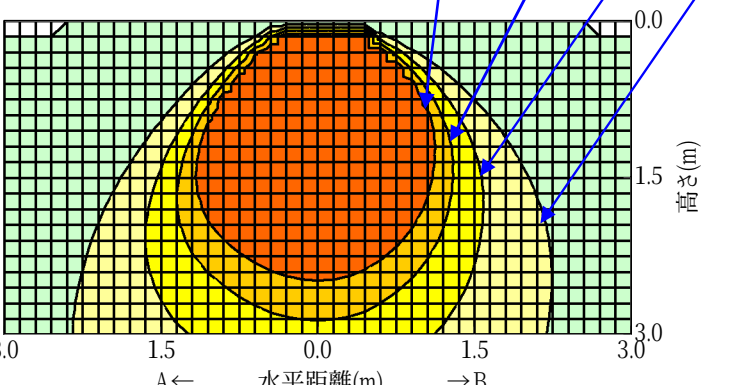
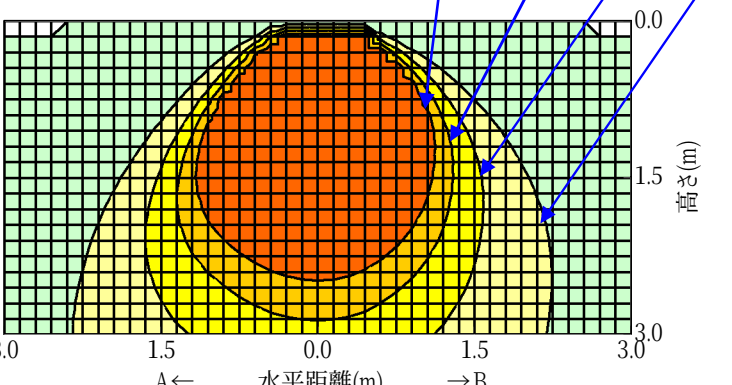
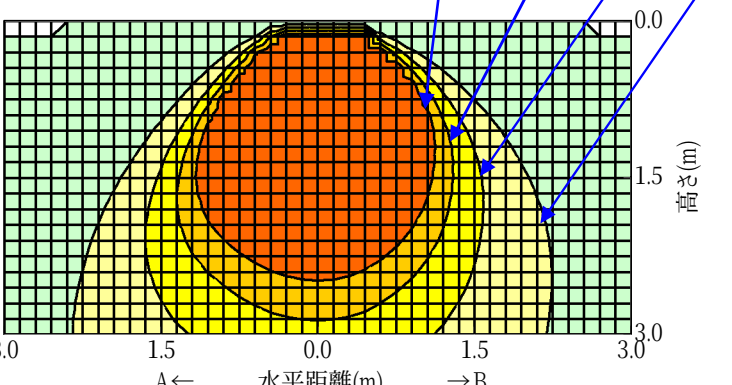
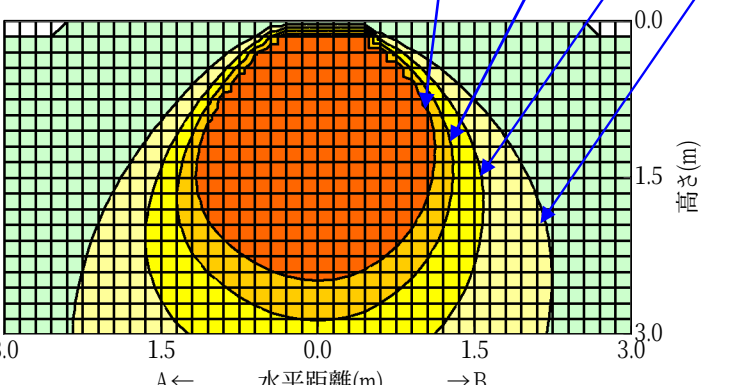
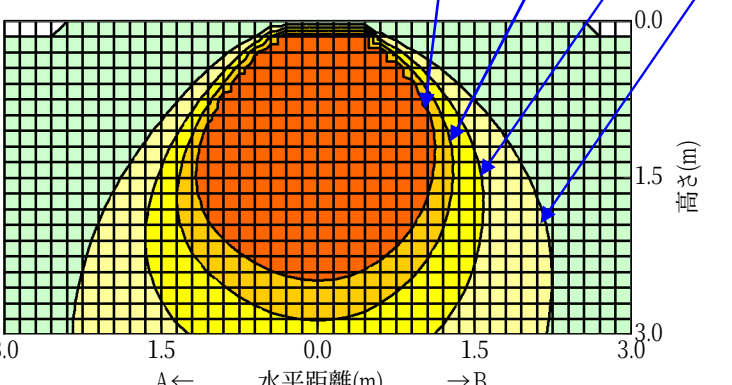
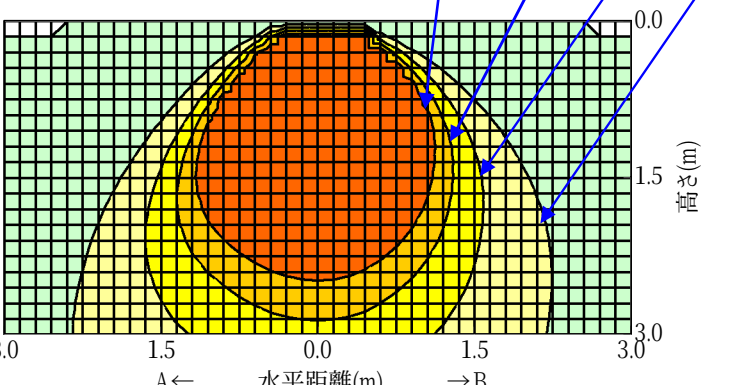
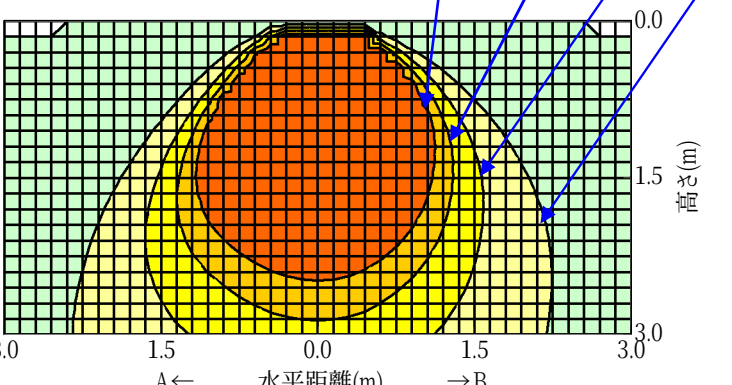
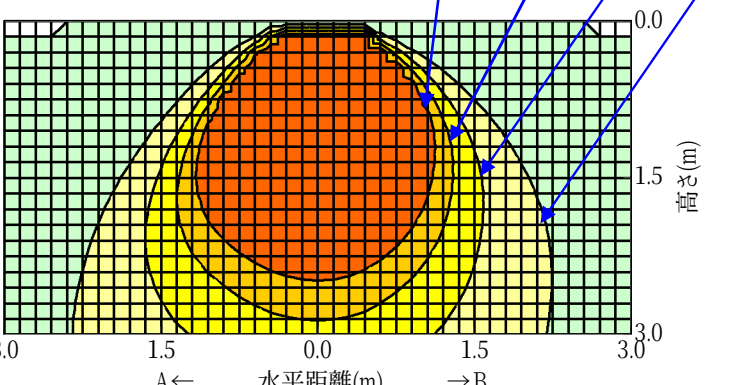
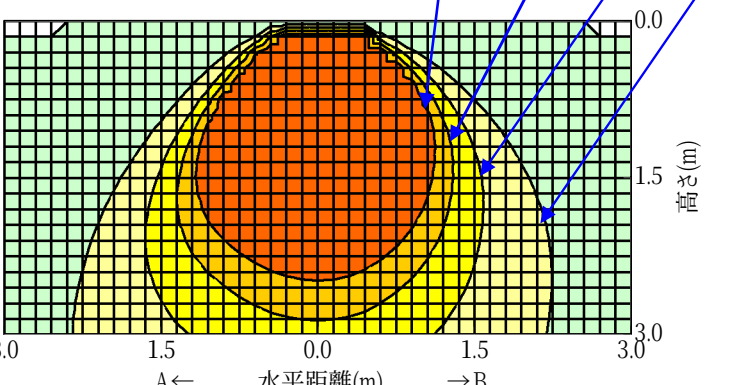
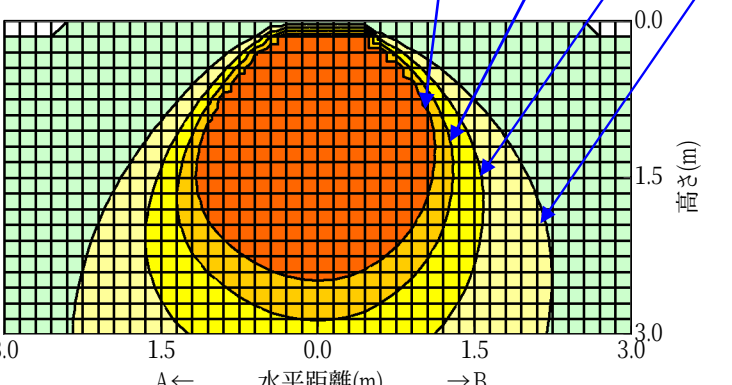
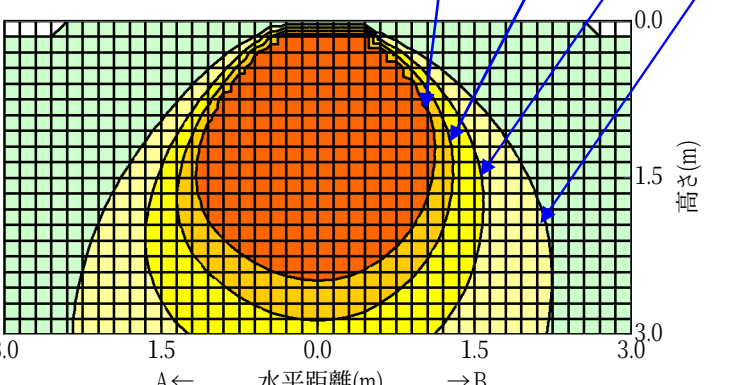
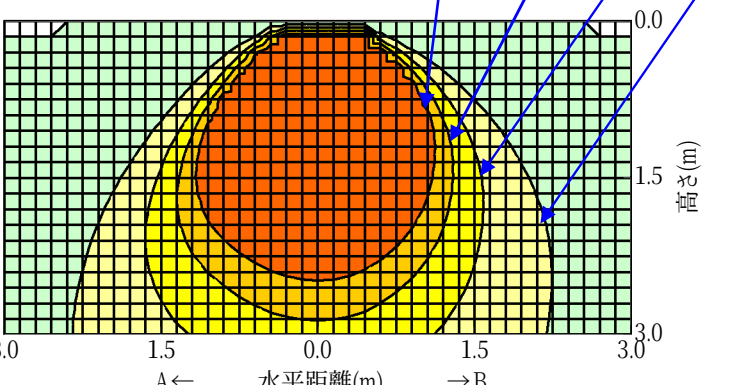
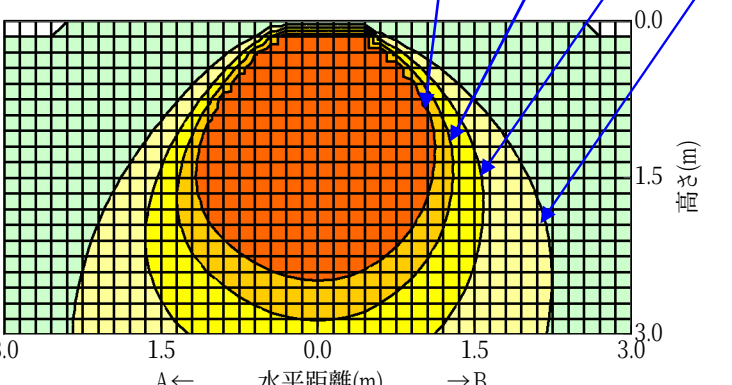
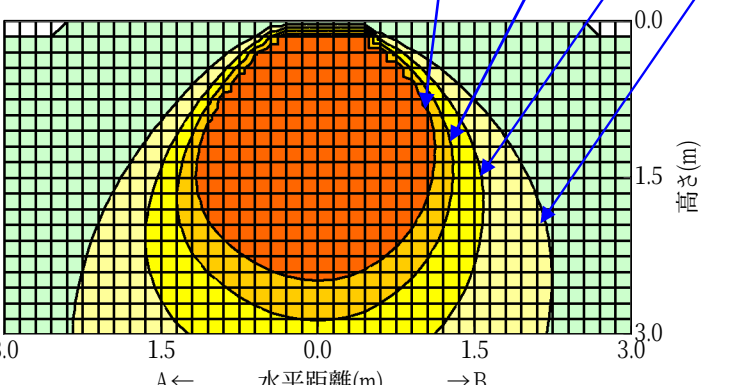
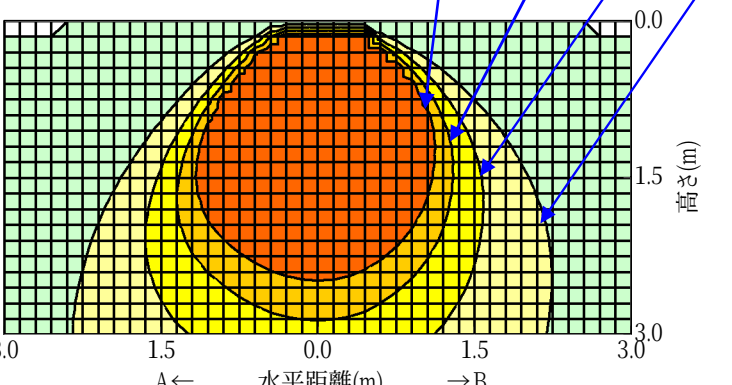
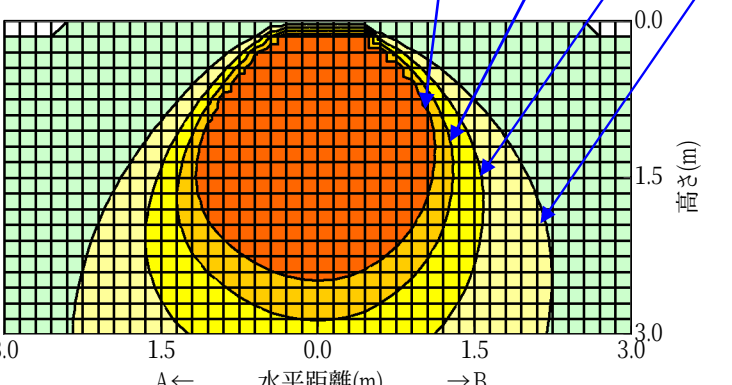
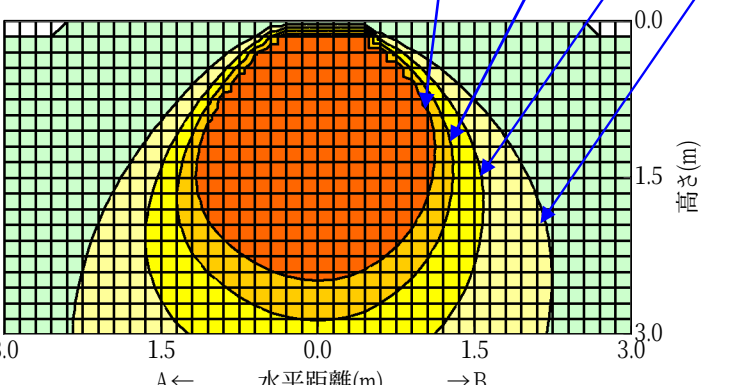
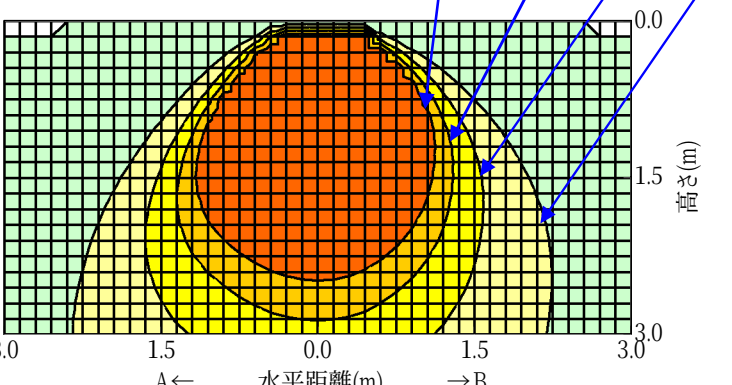
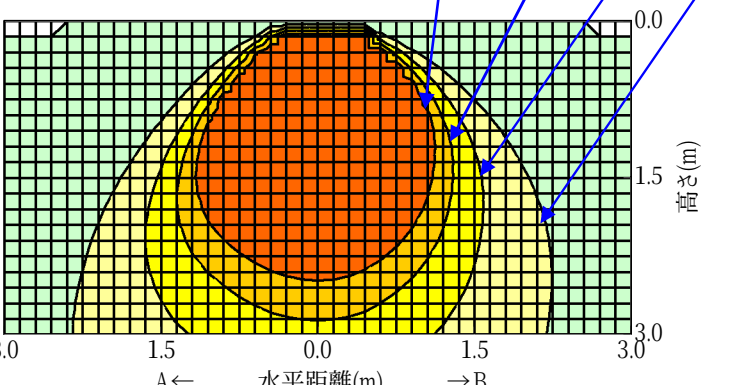
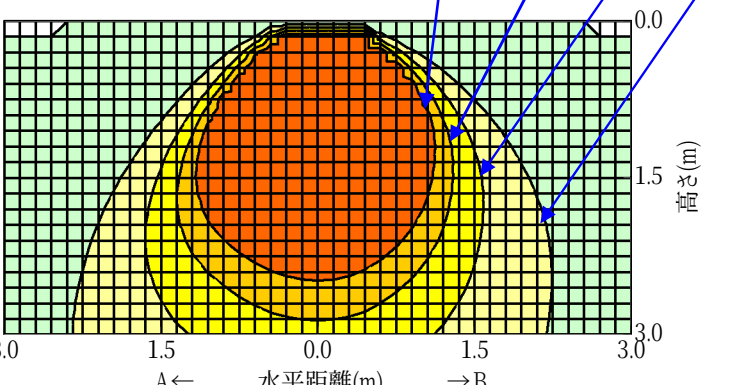
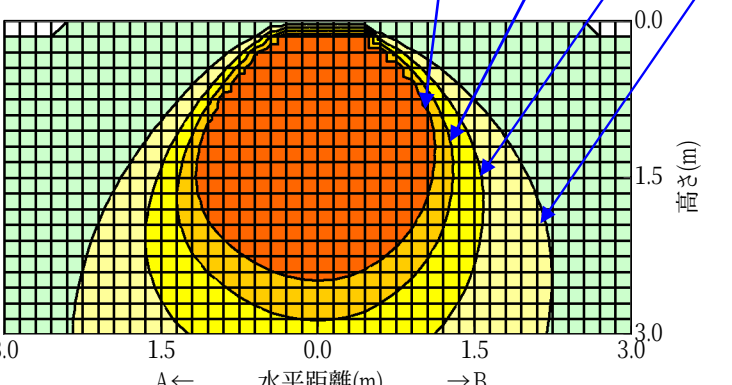
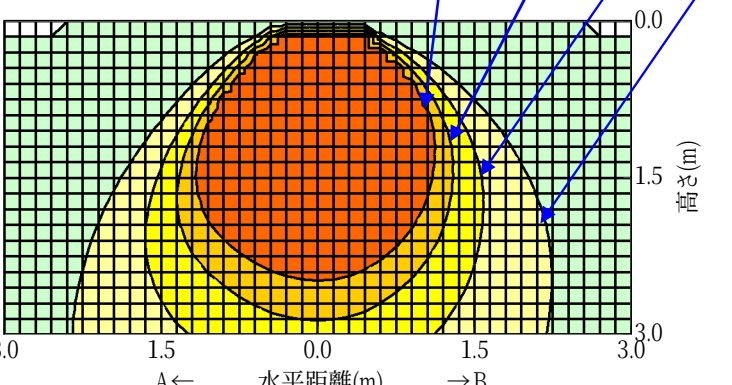
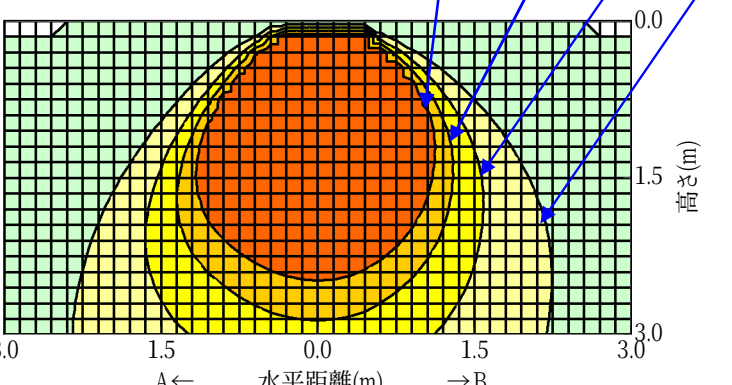
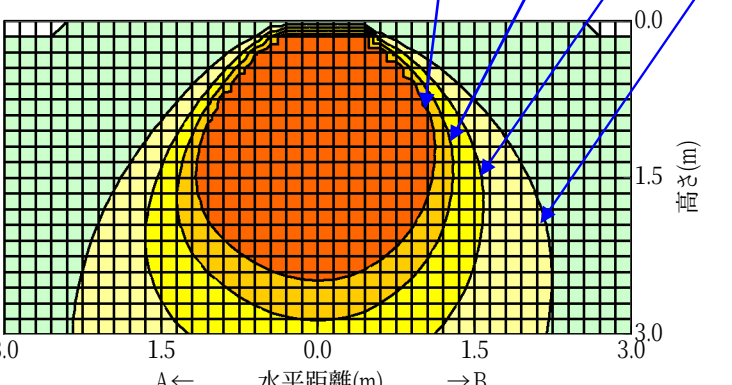
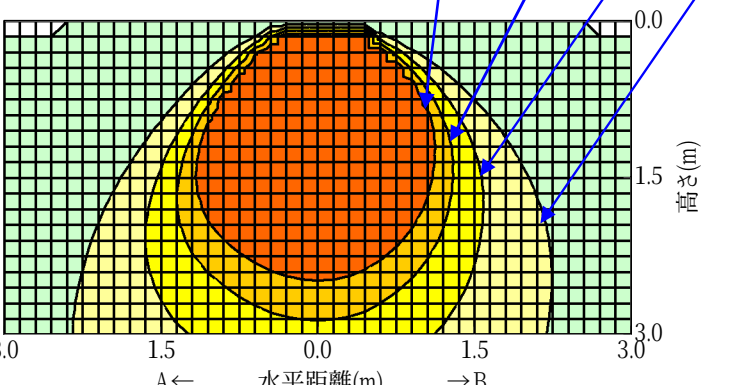
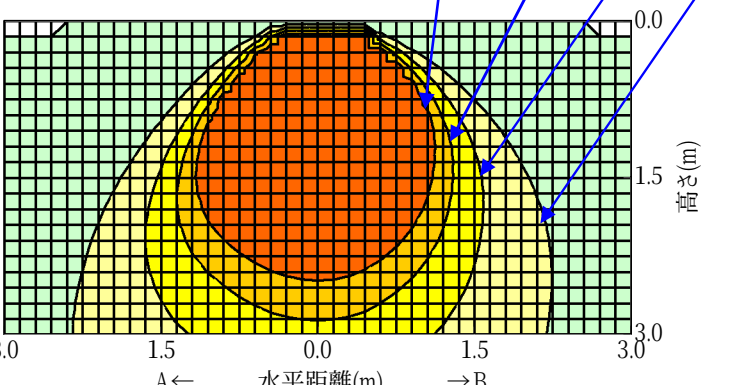
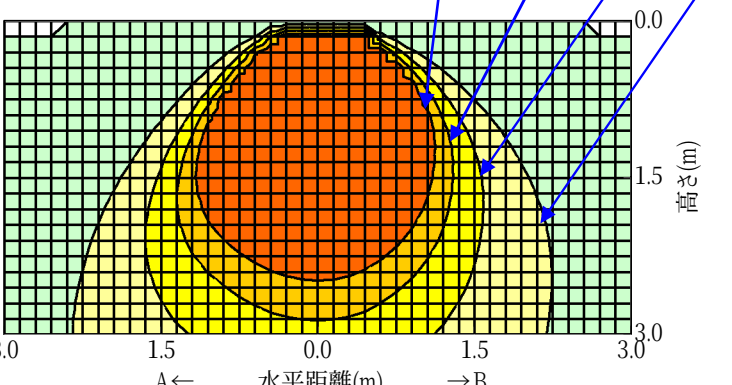
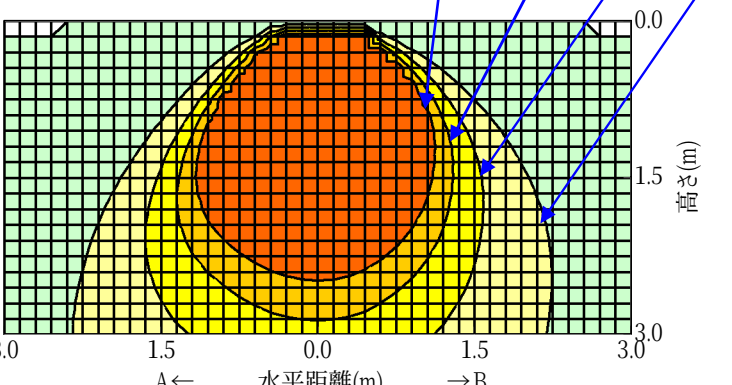
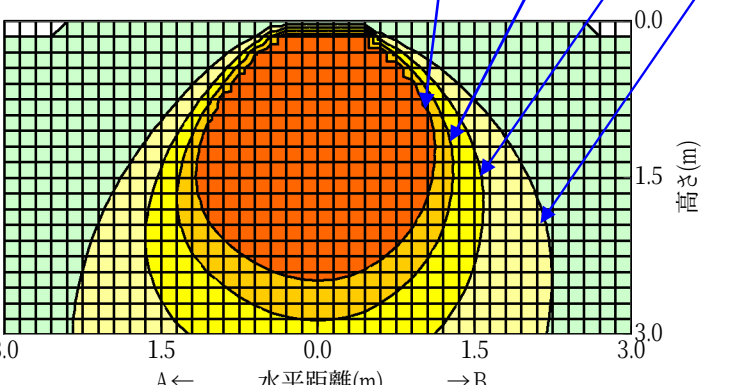
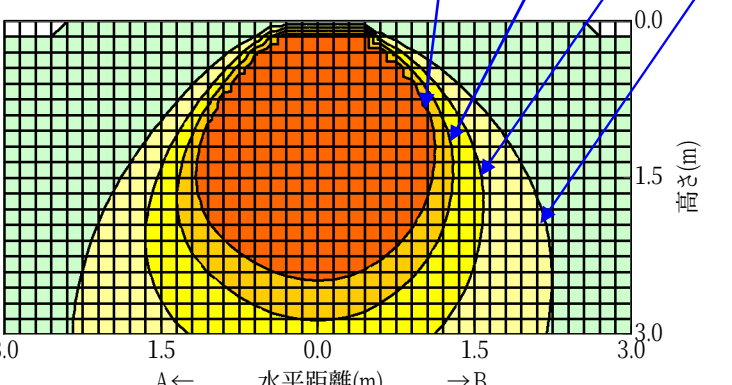
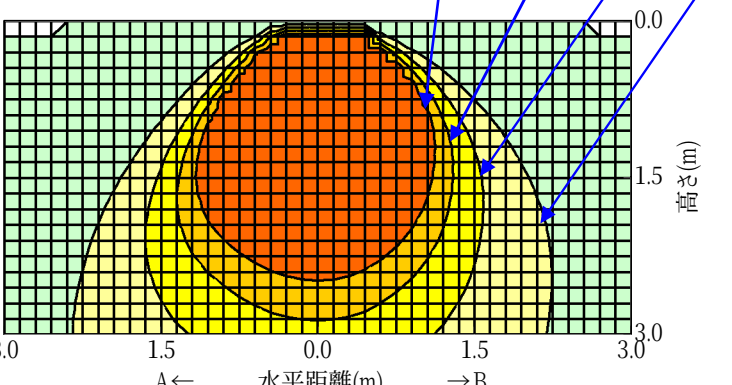
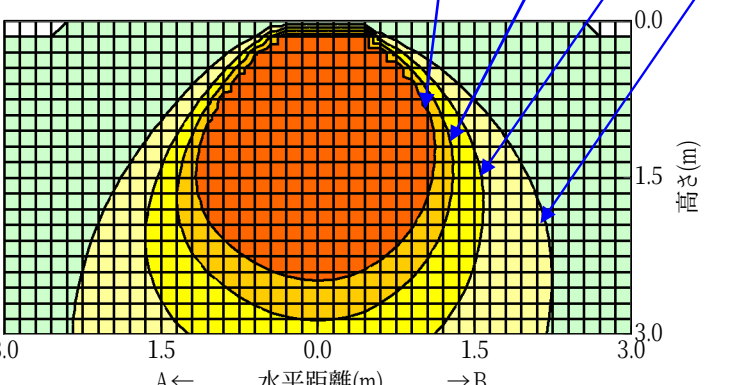
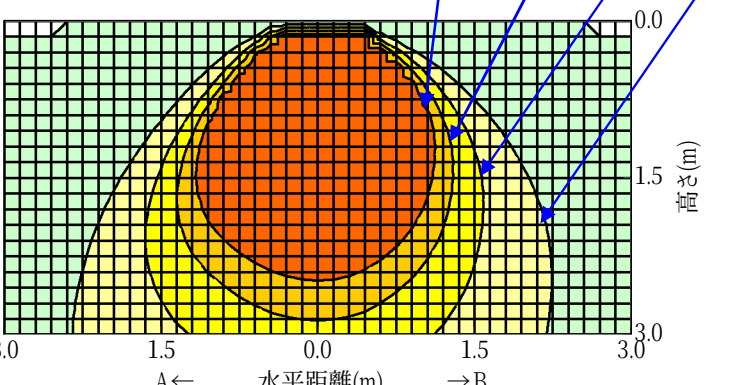
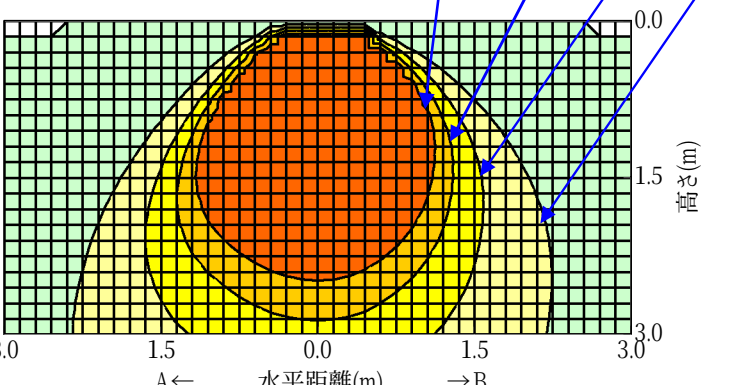
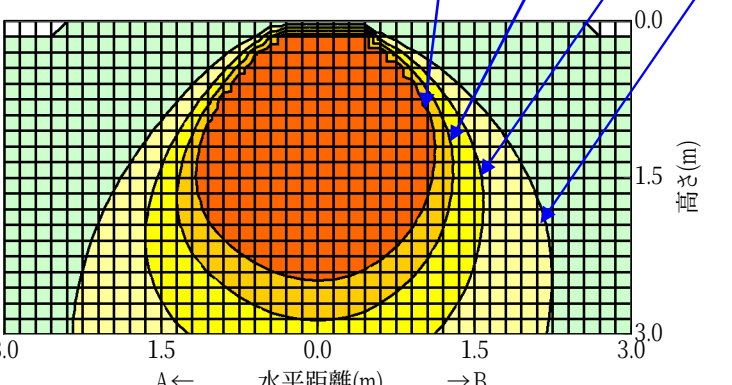
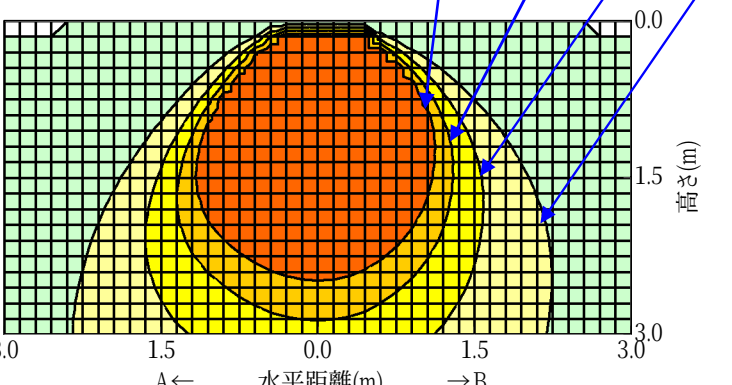
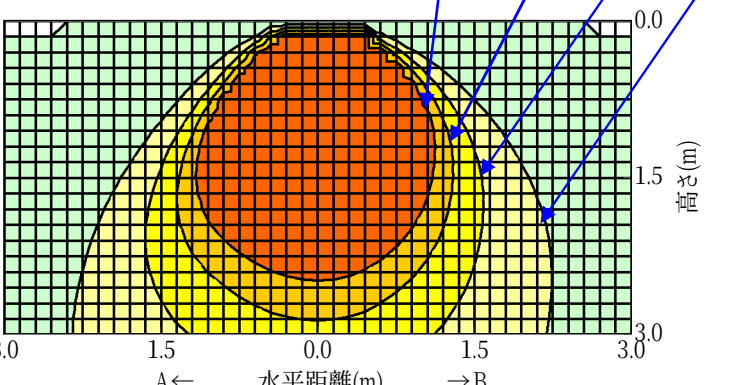
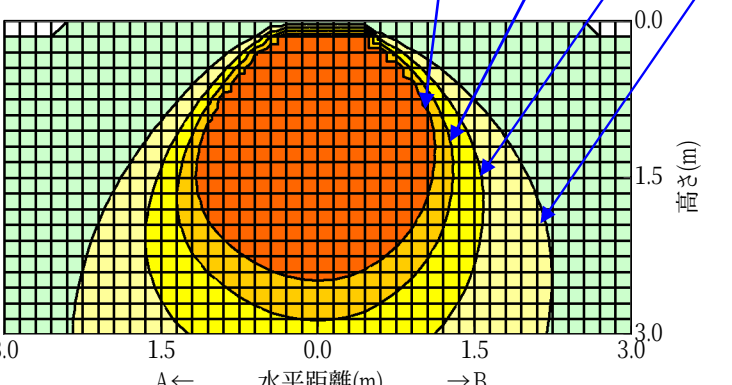
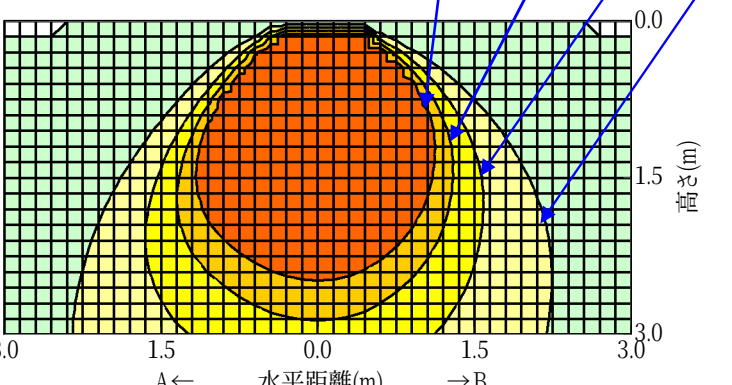
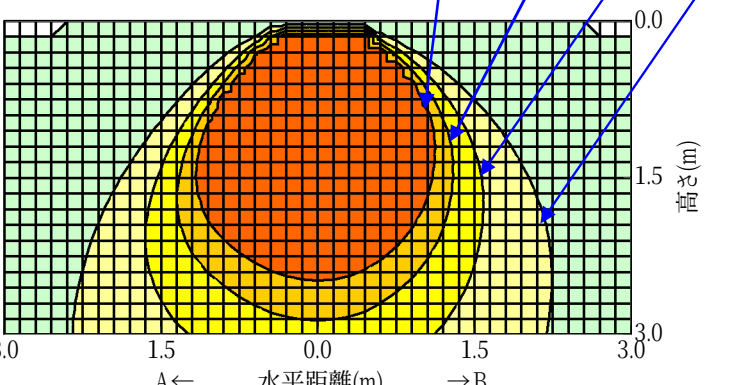
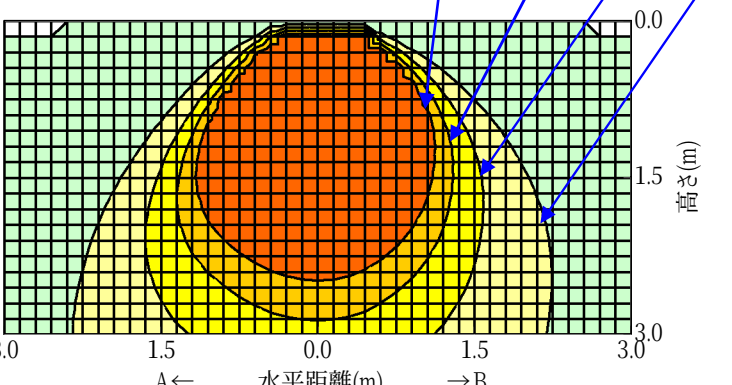
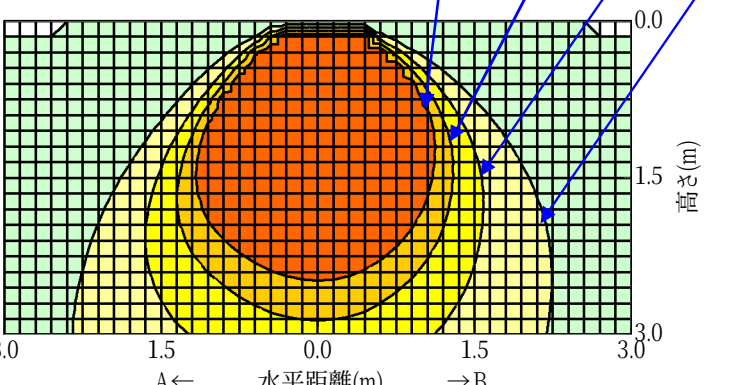
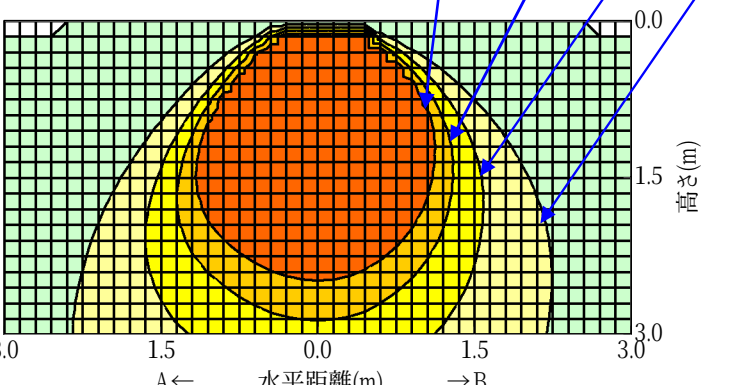
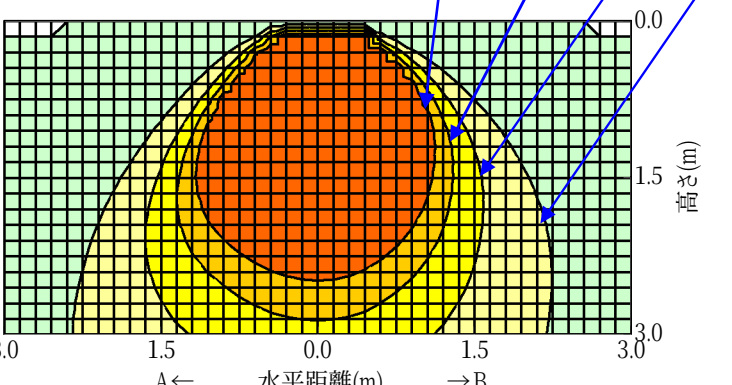
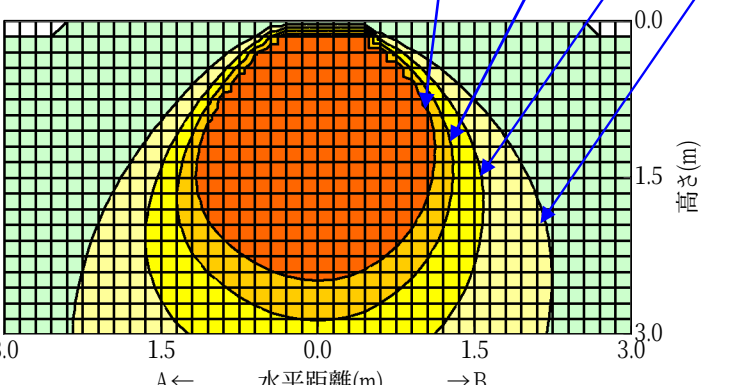
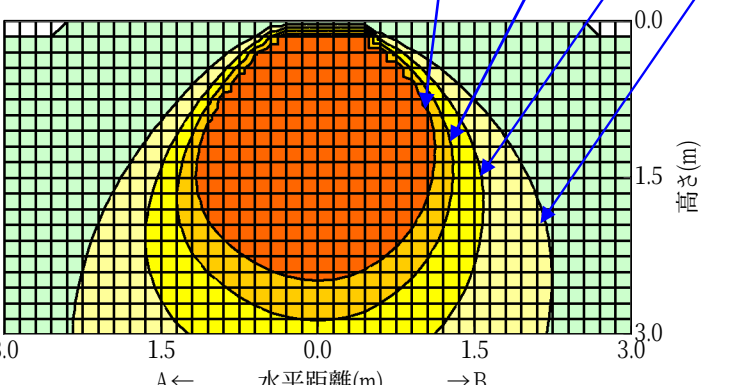
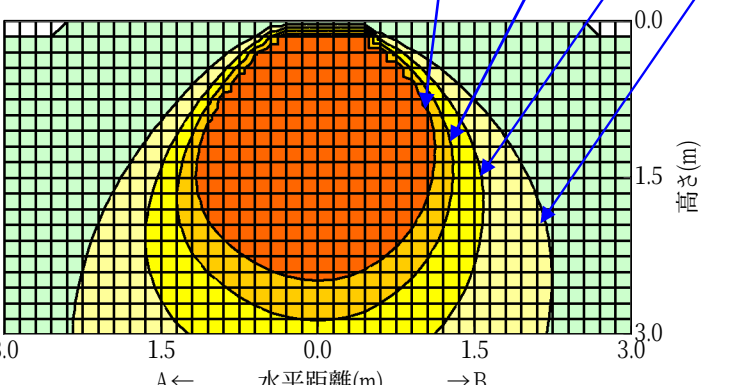
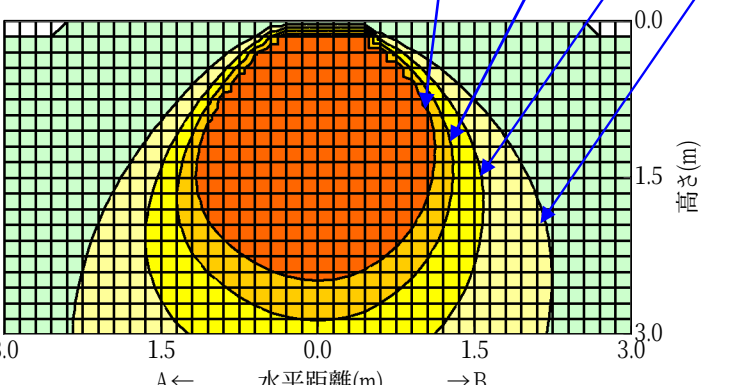
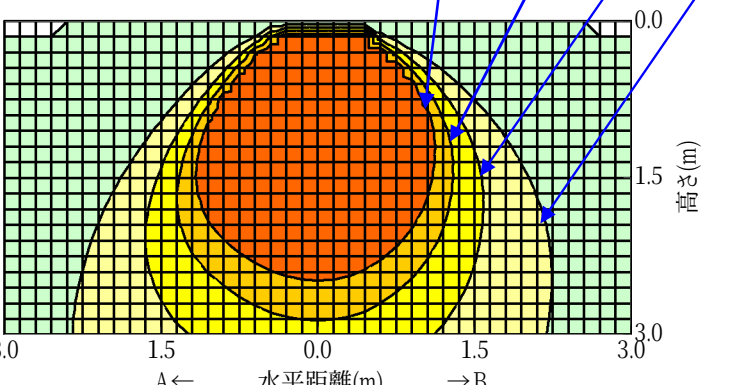
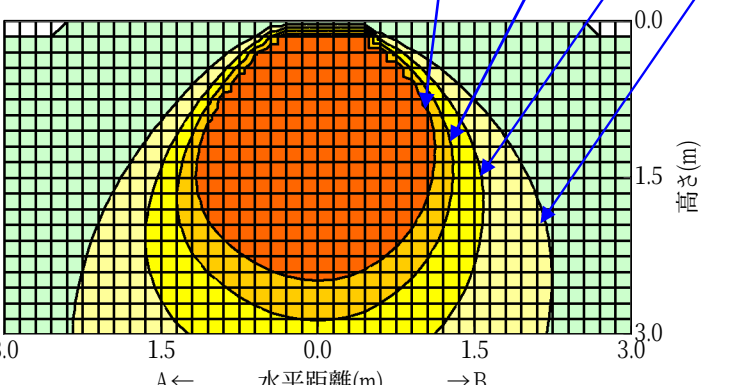
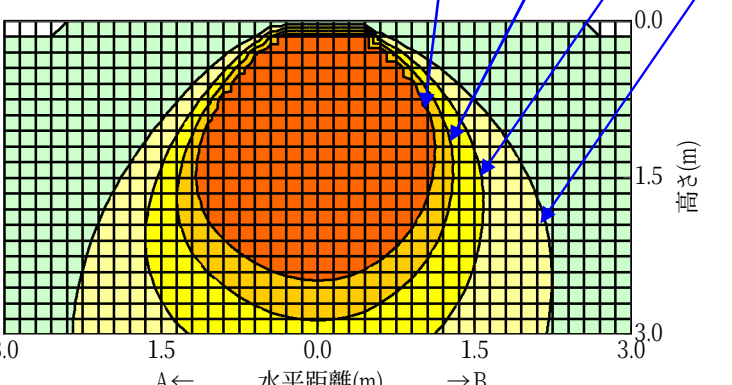


日立照明器具 照明特性

形式: TLE45401W-JZU14A		天井 壁 床 室指数	80%			70%				50%			30%			0%	
<高出力タイプ>			70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%	
<白色相当>			10%														0%
<初期照度補正、連続調光共用形>			照明率 S/H=1.0														
姿図 		0.6	0.63	0.52	0.45	0.62	0.51	0.44	0.40	0.50	0.44	0.40	0.49	0.44	0.39	0.38	
		0.8	0.72	0.62	0.55	0.71	0.62	0.55	0.50	0.60	0.54	0.50	0.59	0.54	0.50	0.48	
		1	0.79	0.70	0.63	0.77	0.69	0.62	0.58	0.67	0.62	0.57	0.66	0.61	0.57	0.55	
		1.25	0.84	0.76	0.70	0.83	0.75	0.69	0.65	0.74	0.68	0.64	0.72	0.67	0.64	0.62	
		1.5	0.88	0.81	0.75	0.87	0.80	0.75	0.70	0.78	0.74	0.70	0.77	0.73	0.69	0.67	
		2	0.93	0.87	0.83	0.92	0.86	0.82	0.78	0.85	0.81	0.77	0.83	0.79	0.76	0.74	
		2.5	0.96	0.91	0.87	0.95	0.90	0.86	0.83	0.88	0.85	0.82	0.86	0.83	0.81	0.78	
		3	0.98	0.94	0.90	0.97	0.93	0.89	0.86	0.91	0.87	0.85	0.89	0.86	0.84	0.81	
光源		4	1.01	0.97	0.94	0.99	0.96	0.93	0.90	0.94	0.91	0.89	0.92	0.90	0.88	0.85	
品名	LED	5	1.02	1.00	0.97	1.01	0.98	0.96	0.94	0.96	0.94	0.92	0.94	0.92	0.91	0.88	
形式		7	1.05	1.03	1.01	1.03	1.01	1.00	0.98	0.99	0.98	0.96	0.97	0.96	0.95	0.92	
光束	11,220 lm	10	1.06	1.05	1.04	1.05	1.04	1.03	1.01	1.02	1.01	1.00	1.00	0.99	0.98	0.95	
器具効率 Ft= 100.0%			単体照度分布(初期) 														
上方光束 Fu= 0.0%																	
下方光束 Fd= 100.0%																	
配光分類																	
BZ-																	
最大取付間隔																	
A-A 1.30 H																	
B-B 1.18 H																	
保守率	良	0.86															
	中	0.81															
	否	0.72															
光度 (cd/1000 lm)																	
	A-0	B-B	C-0	A'-0	C'-0												
0	438	438	438														
10	430	427	428														
20	408	390	394														
30	381	342	351														
40	308	280	300														
50	184	217	214														
60	85	137	116														
70	44	70	50														
80	18	22	20														
90																	
100																	
110																	
120																	
130																	
140																	
150																	
160																	
170																	
180																	

配光曲線		
		
		
		
		
		
		
		
		
		
		
		
		
		
		
		
		
		
		
		
		
		
		
		
		
		
		
		
		
		
		
		
		
		
		
		
		
		
		
		
		
		
		
		
		
		
		
		
		
		
		
		
		
		

配光曲線

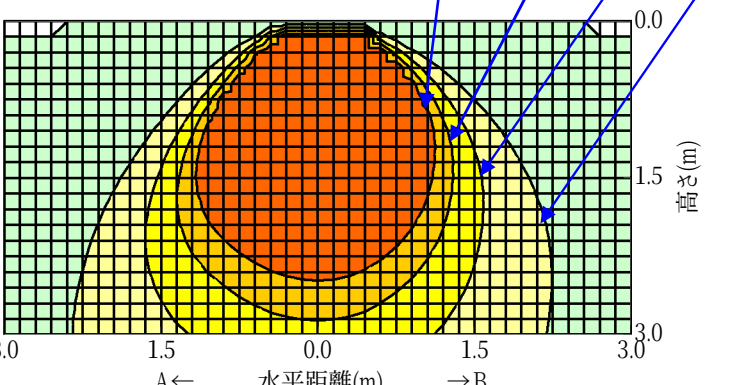