
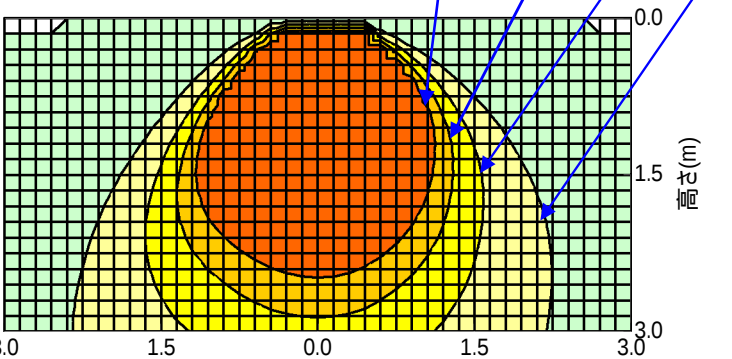
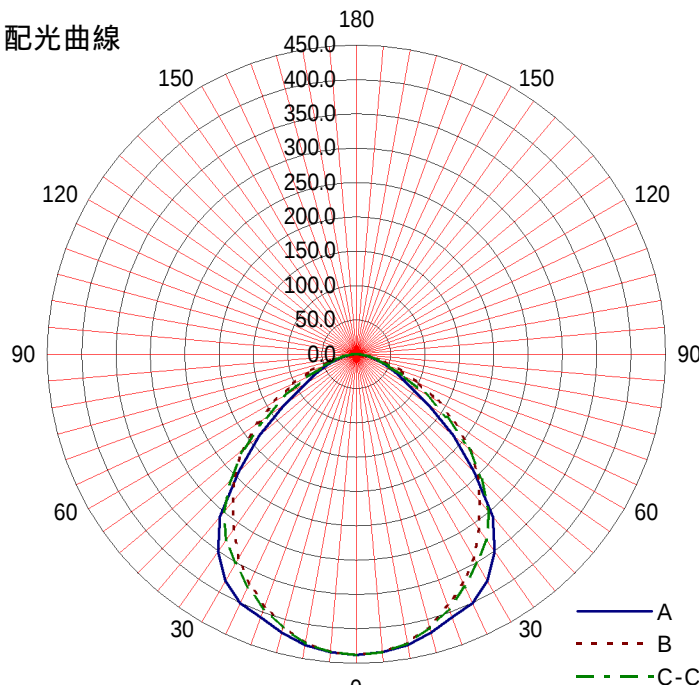


日立照明器具 照明特性

形式: TLE45401W-JZU14 <高出力タイプ> <白色相当> <照度補正、連続調光共用形>		天井	80%			70%				50%			30%			0%	
		壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%	
		床	10%														0%
		室指数	照明率 S/H=1.0														
姿図 		0.6	0.63	0.52	0.45	0.62	0.51	0.44	0.40	0.50	0.44	0.40	0.49	0.44	0.39	0.38	
		0.8	0.72	0.62	0.55	0.71	0.62	0.55	0.50	0.60	0.54	0.50	0.59	0.54	0.50	0.48	
		1	0.79	0.70	0.63	0.77	0.69	0.62	0.58	0.67	0.62	0.57	0.66	0.61	0.57	0.55	
		1.25	0.84	0.76	0.70	0.83	0.75	0.69	0.65	0.74	0.68	0.64	0.72	0.67	0.64	0.62	
		1.5	0.88	0.81	0.75	0.87	0.80	0.75	0.70	0.78	0.74	0.70	0.77	0.73	0.69	0.67	
		2	0.93	0.87	0.83	0.92	0.86	0.82	0.78	0.85	0.81	0.77	0.83	0.79	0.76	0.74	
		2.5	0.96	0.91	0.87	0.95	0.90	0.86	0.83	0.88	0.85	0.82	0.86	0.83	0.81	0.78	
		3	0.98	0.94	0.90	0.97	0.93	0.89	0.86	0.91	0.87	0.85	0.89	0.86	0.84	0.81	
		4	1.01	0.97	0.94	0.99	0.96	0.93	0.90	0.94	0.91	0.89	0.92	0.90	0.88	0.85	
光源		5	1.02	1.00	0.97	1.01	0.98	0.96	0.94	0.96	0.94	0.92	0.94	0.92	0.91	0.88	
品名	LED	7	1.05	1.03	1.01	1.03	1.01	1.00	0.98	0.99	0.98	0.96	0.97	0.96	0.95	0.92	
形式		10	1.06	1.05	1.04	1.05	1.04	1.03	1.01	1.02	1.01	1.00	1.00	0.99	0.98	0.95	
光束	11,220 lm																

器具効率 Ft= 100.0%			単体照度分布(初期) 				
上方光束 Fu= 0.0%							
下方光束 Fd= 100.0%							
配光分類							
BZ-							
最大取付間隔							
A-A 1.30 H							
B-B 1.18 H							
保守率	良	0.81					
	中	0.77					
	否	0.68					
光度 (cd/1000 lm)							
	A-0	B-B	C-0	A'-0	C'-0		
0	438	438	438				
10	430	427	428				
20	408	390	394				
30	381	342	351				
40	308	280	300				
50	184	217	214				
60	85	137	116				
70	44	70	50				
80	18	22	20				
90							
100							
110							
120							
130							
140							
150							
160							
170							
180							

配光曲線		
		
A B C-C'		