

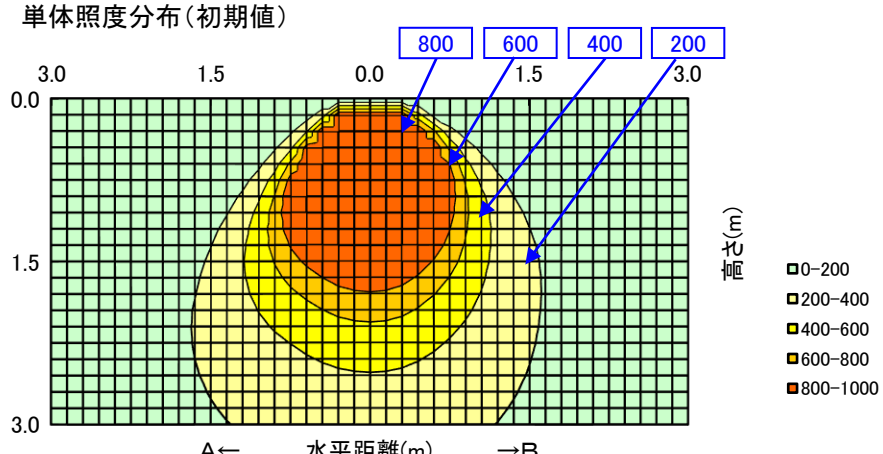


日立照明器具 照明特性

名称: 一体形LEDベース (スクエアタイプ)	反射率	天井	80%			70%				50%			30%			0%			
		壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%			
		床	10%														0%		
形式: TLE454AD-JZL14A	室指数	固有照明率 S/H=1.0																	
<備考>	0.6	0.63	0.52	0.45	0.61	0.51	0.44	0.40	0.50	0.44	0.40	0.49	0.44	0.39	0.38				
	0.8	0.72	0.62	0.55	0.71	0.62	0.55	0.50	0.60	0.54	0.50	0.59	0.54	0.50	0.48				
姿図 	1	0.79	0.69	0.63	0.77	0.69	0.62	0.58	0.67	0.62	0.57	0.66	0.61	0.57	0.55				
	1.25	0.84	0.76	0.70	0.83	0.75	0.69	0.65	0.74	0.68	0.64	0.72	0.67	0.64	0.62				
	1.5	0.88	0.81	0.75	0.87	0.80	0.75	0.70	0.78	0.74	0.70	0.77	0.73	0.69	0.67				
	2	0.93	0.87	0.83	0.92	0.86	0.82	0.78	0.85	0.81	0.77	0.83	0.79	0.76	0.74				
	2.5	0.96	0.91	0.87	0.95	0.90	0.86	0.83	0.88	0.85	0.82	0.86	0.83	0.81	0.78				
	3	0.98	0.94	0.90	0.97	0.93	0.89	0.86	0.91	0.87	0.85	0.89	0.86	0.84	0.81				
光源形式	4	1.01	0.97	0.94	0.99	0.96	0.93	0.90	0.94	0.91	0.89	0.92	0.90	0.88	0.85				
-	5	1.02	0.99	0.97	1.01	0.98	0.96	0.94	0.96	0.94	0.92	0.94	0.92	0.91	0.88				
器具光束	7	1.05	1.03	1.01	1.03	1.01	1.00	0.98	0.99	0.98	0.96	0.97	0.96	0.95	0.92				
5,810 lm	10	1.06	1.05	1.04	1.05	1.04	1.03	1.01	1.02	1.01	1.00	1.00	0.99	0.98	0.95				
器具効率 Ft= 100%		単体照度分布(初期値) 																	
上方光束 Fu= 0%																			
下方光束 Fd= 100%																			
最大取付間隔																			
A-A 1.30 H																			
B-B 1.18 H																			
保守率	良															0.86			
	中	0.81																	
	否	0.72																	
光度 (cd/1000 lm)		配光曲線 (cd/1000 lm) 																	
	A-0															B-B	C-0	A'-0	C'-0
0	438															438	438		
10	430															427	428		
20	408															390	394		
30	381															342	351		
40	308															280	300		
50	184															217	214		
60	85															137	116		
70	44															70	50		
80	18															22	20		
90																			
100																			
110																			
120																			
130																			
140																			
150																			
160																			
170																			
180																			

配光曲線
(cd/1000 lm)

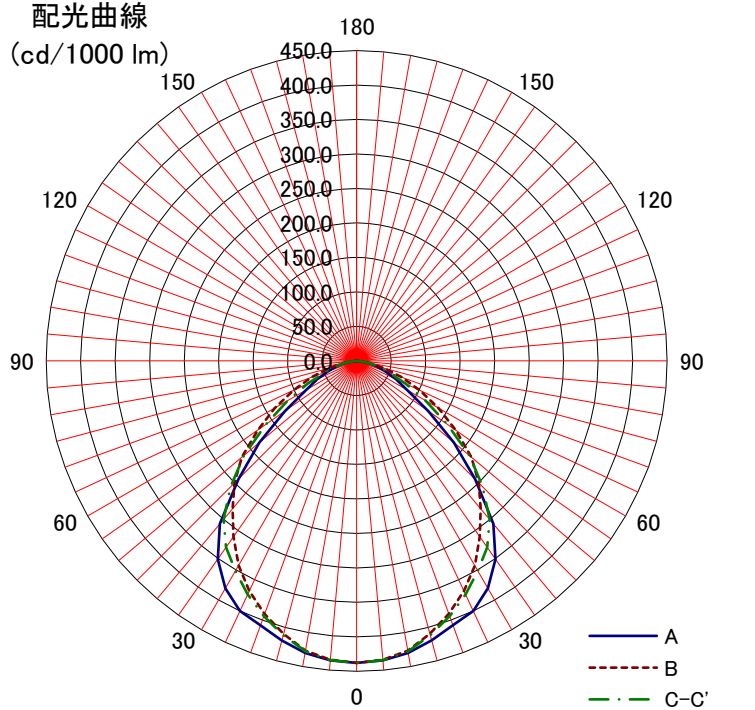