
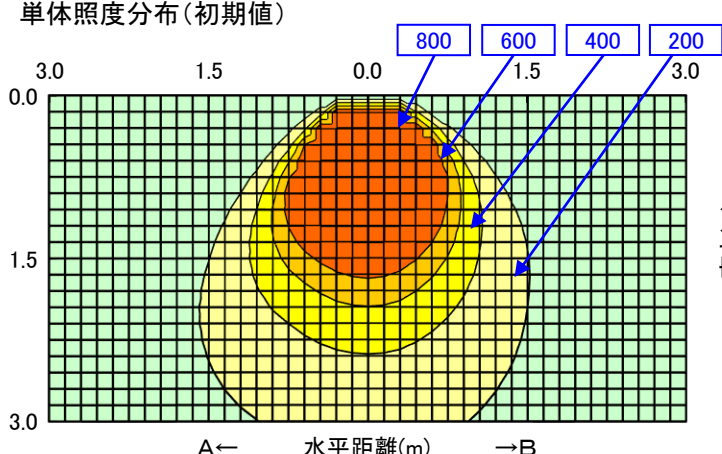


日立照明器具 照明特性

名称: 一体形LEDベース (スクエアタイプ)		反射率	天井	80%			70%			50%			30%			0%	
形式: TLE454AL-JZL14A			壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%
			床	10%												0%	
室指数		固有照明率 S/H=1.0															
<備考>		0.6	0.63	0.52	0.45	0.61	0.51	0.44	0.40	0.50	0.44	0.40	0.49	0.44	0.39	0.38	
		0.8	0.72	0.62	0.55	0.71	0.62	0.55	0.50	0.60	0.54	0.50	0.59	0.54	0.50	0.48	
		1	0.79	0.69	0.63	0.77	0.69	0.62	0.58	0.67	0.62	0.57	0.66	0.61	0.57	0.55	
		1.25	0.84	0.76	0.70	0.83	0.75	0.69	0.65	0.74	0.68	0.64	0.72	0.67	0.64	0.62	
		1.5	0.88	0.81	0.75	0.87	0.80	0.75	0.70	0.78	0.74	0.70	0.77	0.73	0.69	0.67	
		2	0.93	0.87	0.83	0.92	0.86	0.82	0.78	0.85	0.81	0.77	0.83	0.79	0.76	0.74	
		2.5	0.96	0.91	0.87	0.95	0.90	0.86	0.83	0.88	0.85	0.82	0.86	0.83	0.81	0.78	
		3	0.98	0.94	0.90	0.97	0.93	0.89	0.86	0.91	0.87	0.85	0.89	0.86	0.84	0.81	
光源形式		4	1.01	0.97	0.94	0.99	0.96	0.93	0.90	0.94	0.91	0.89	0.92	0.90	0.88	0.85	
器具光束 5,180 lm		5	1.02	0.99	0.97	1.01	0.98	0.96	0.94	0.96	0.94	0.92	0.94	0.92	0.91	0.88	
		7	1.05	1.03	1.01	1.03	1.01	1.00	0.98	0.99	0.98	0.96	0.97	0.96	0.95	0.92	
		10	1.06	1.05	1.04	1.05	1.04	1.03	1.01	1.02	1.01	1.00	1.00	0.99	0.98	0.95	
器具効率 Ft= 100%		<p>単体照度分布(初期値)</p> 															
上方光束 Fu= 0%																	
下方光束 Fd= 100%																	
最大取付間隔																	
A-A		1.30	H														
B-B		1.18	H														
保守率	良	0.86															
	中	0.81															
	否	0.72															
光度 (cd/1000 lm)																	
	A-0	B-B	C-0	A'-0	C'-0												
0	438	438	438														
10	430	427	428														
20	408	390	394														
30	381	342	351														
40	308	280	300														
50	184	217	214														
60	85	137	116														
70	44	70	50														
80	18	22	20														
90																	
100																	
110																	
120																	
130																	
140																	
150																	
160																	
170																	
180																	
配光曲線 (cd/1000 lm)		