
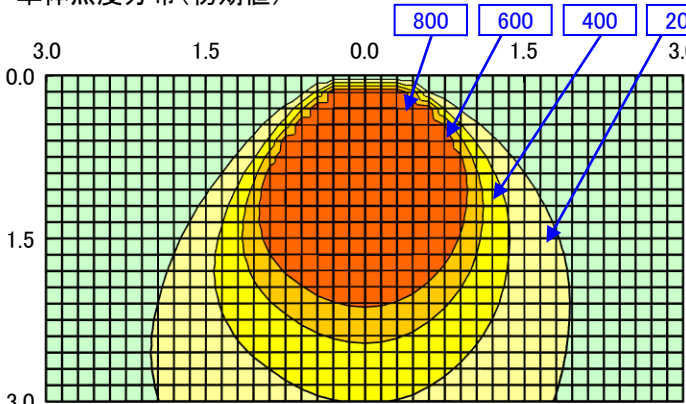
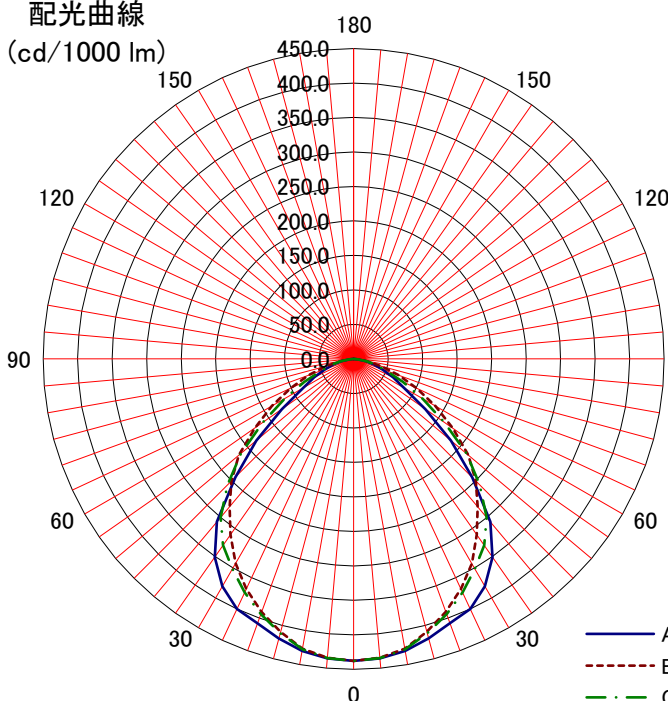


日立照明器具 照明特性

名称: 一体形LEDベース (スクエアタイプ)	反射率	天井	80%			70%				50%			30%			0%																																																																																																																							
		壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%																																																																																																																							
		床	10%														0%																																																																																																																						
形式: TLE454AW-JZ14A	室指数	固有照明率 S/H=1.0																																																																																																																																					
〈備考〉	0.6	0.63	0.52	0.45	0.61	0.51	0.44	0.40	0.50	0.44	0.40	0.49	0.44	0.39	0.38																																																																																																																								
	0.8	0.72	0.62	0.55	0.71	0.62	0.55	0.50	0.60	0.54	0.50	0.59	0.54	0.50	0.48																																																																																																																								
姿図 	1	0.79	0.69	0.63	0.77	0.69	0.62	0.58	0.67	0.62	0.57	0.66	0.61	0.57	0.55																																																																																																																								
	1.25	0.84	0.76	0.70	0.83	0.75	0.69	0.65	0.74	0.68	0.64	0.72	0.67	0.64	0.62																																																																																																																								
	1.5	0.88	0.81	0.75	0.87	0.80	0.75	0.70	0.78	0.74	0.70	0.77	0.73	0.69	0.67																																																																																																																								
	2	0.93	0.87	0.83	0.92	0.86	0.82	0.78	0.85	0.81	0.77	0.83	0.79	0.76	0.74																																																																																																																								
	2.5	0.96	0.91	0.87	0.95	0.90	0.86	0.83	0.88	0.85	0.82	0.86	0.83	0.81	0.78																																																																																																																								
	3	0.98	0.94	0.90	0.97	0.93	0.89	0.86	0.91	0.87	0.85	0.89	0.86	0.84	0.81																																																																																																																								
光源形式 -	4	1.01	0.97	0.94	0.99	0.96	0.93	0.90	0.94	0.91	0.89	0.92	0.90	0.88	0.85																																																																																																																								
	5	1.02	0.99	0.97	1.01	0.98	0.96	0.94	0.96	0.94	0.92	0.94	0.92	0.91	0.88																																																																																																																								
器具光束 8,330 lm	7	1.05	1.03	1.01	1.03	1.01	1.00	0.98	0.99	0.98	0.96	0.97	0.96	0.95	0.92																																																																																																																								
	10	1.06	1.05	1.04	1.05	1.04	1.03	1.01	1.02	1.01	1.00	1.00	0.99	0.98	0.95																																																																																																																								
器具効率 Ft= 100%		単体照度分布(初期値) 																																																																																																																																					
上方光束 Fu= 0%																																																																																																																																							
下方光束 Fd= 100%																																																																																																																																							
最大取付間隔		A← 水平距離(m) →B																																																																																																																																					
A-A 1.30 H																																																																																																																																							
B-B 1.18 H																																																																																																																																							
保守率	良	0.86	配光曲線 (cd/1000 lm) 																																																																																																																																				
	中	0.81																																																																																																																																					
	否	0.72																																																																																																																																					
光度 (cd/1000 lm)		<table><tr><td></td><td>A-0</td><td>B-B</td><td>C-0</td><td>A'-0</td><td>C'-0</td></tr><tr><td>0</td><td>438</td><td>438</td><td>438</td><td></td><td></td></tr><tr><td>10</td><td>430</td><td>427</td><td>428</td><td></td><td></td></tr><tr><td>20</td><td>408</td><td>390</td><td>394</td><td></td><td></td></tr><tr><td>30</td><td>381</td><td>342</td><td>351</td><td></td><td></td></tr><tr><td>40</td><td>308</td><td>280</td><td>300</td><td></td><td></td></tr><tr><td>50</td><td>184</td><td>217</td><td>214</td><td></td><td></td></tr><tr><td>60</td><td>85</td><td>137</td><td>116</td><td></td><td></td></tr><tr><td>70</td><td>44</td><td>70</td><td>50</td><td></td><td></td></tr><tr><td>80</td><td>18</td><td>22</td><td>20</td><td></td><td></td></tr><tr><td>90</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>100</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>110</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>120</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>130</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>140</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>150</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>160</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>170</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>180</td><td></td><td></td><td></td><td></td><td></td></tr></table>															A-0	B-B	C-0	A'-0	C'-0	0	438	438	438			10	430	427	428			20	408	390	394			30	381	342	351			40	308	280	300			50	184	217	214			60	85	137	116			70	44	70	50			80	18	22	20			90						100						110						120						130						140						150						160						170						180					
	A-0															B-B	C-0	A'-0	C'-0																																																																																																																				
0	438															438	438																																																																																																																						
10	430															427	428																																																																																																																						
20	408															390	394																																																																																																																						
30	381															342	351																																																																																																																						
40	308															280	300																																																																																																																						
50	184															217	214																																																																																																																						
60	85															137	116																																																																																																																						
70	44															70	50																																																																																																																						
80	18															22	20																																																																																																																						
90																																																																																																																																							
100																																																																																																																																							
110																																																																																																																																							
120																																																																																																																																							
130																																																																																																																																							
140																																																																																																																																							
150																																																																																																																																							
160																																																																																																																																							
170																																																																																																																																							
180																																																																																																																																							