
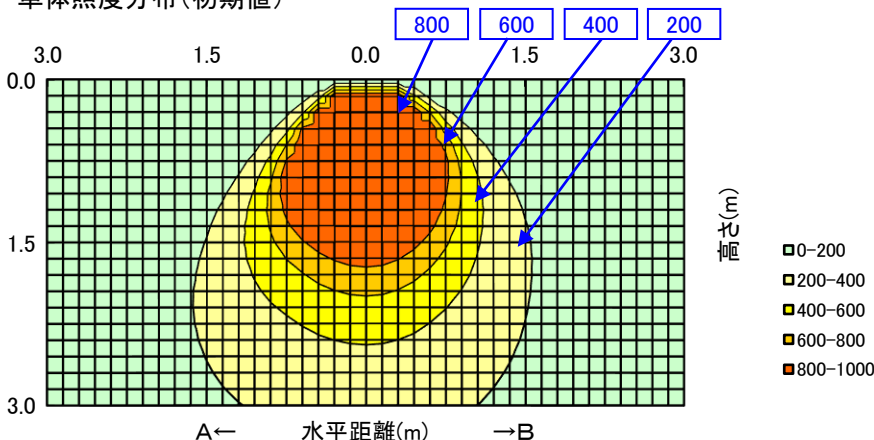
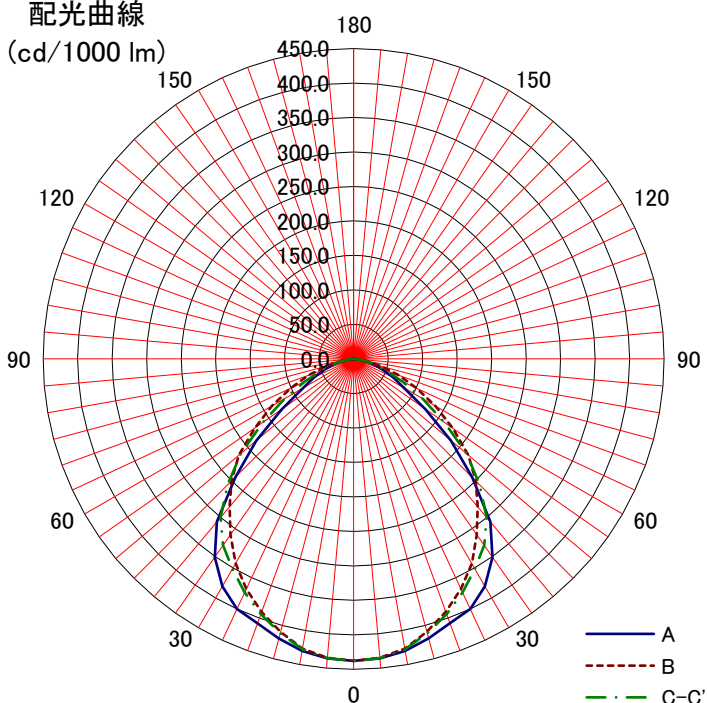


日立照明器具 照明特性

名称: 一体形LEDベース (スクエアタイプ)	反射率	天井	80%			70%				50%			30%			0%
		壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%
		床	10%													
形式: TLE454AWW-JZL14A	室指数	固有照明率 S/H=1.0														
〈備考〉	0.6	0.63	0.52	0.45	0.61	0.51	0.44	0.40	0.50	0.44	0.40	0.49	0.44	0.39	0.38	
	0.8	0.72	0.62	0.55	0.71	0.62	0.55	0.50	0.60	0.54	0.50	0.59	0.54	0.50	0.48	
姿図 	1	0.79	0.69	0.63	0.77	0.69	0.62	0.58	0.67	0.62	0.57	0.66	0.61	0.57	0.55	
	1.25	0.84	0.76	0.70	0.83	0.75	0.69	0.65	0.74	0.68	0.64	0.72	0.67	0.64	0.62	
	1.5	0.88	0.81	0.75	0.87	0.80	0.75	0.70	0.78	0.74	0.70	0.77	0.73	0.69	0.67	
	2	0.93	0.87	0.83	0.92	0.86	0.82	0.78	0.85	0.81	0.77	0.83	0.79	0.76	0.74	
	2.5	0.96	0.91	0.87	0.95	0.90	0.86	0.83	0.88	0.85	0.82	0.86	0.83	0.81	0.78	
	3	0.98	0.94	0.90	0.97	0.93	0.89	0.86	0.91	0.87	0.85	0.89	0.86	0.84	0.81	
光源形式 -	4	1.01	0.97	0.94	0.99	0.96	0.93	0.90	0.94	0.91	0.89	0.92	0.90	0.88	0.85	
	5	1.02	0.99	0.97	1.01	0.98	0.96	0.94	0.96	0.94	0.92	0.94	0.92	0.91	0.88	
器具光束 5,450 lm	7	1.05	1.03	1.01	1.03	1.01	1.00	0.98	0.99	0.98	0.96	0.97	0.96	0.95	0.92	
	10	1.06	1.05	1.04	1.05	1.04	1.03	1.01	1.02	1.01	1.00	1.00	0.99	0.98	0.95	
器具効率 Ft= 100%		単体照度分布(初期値) 														
上方光束 Fu= 0%																
下方光束 Fd= 100%																
最大取付間隔		A← 水平距離(m) →B														
A-A 1.30 H																
B-B 1.18 H																
保守率	良	0.86	配光曲線 (cd/1000 lm) 													
	中	0.81														
	否	0.72														
光度 (cd/1000 lm)		A-0	B-B	C-0	A'-0	C'-0										
	0	438	438	438												
	10	430	427	428												
	20	408	390	394												
	30	381	342	351												
	40	308	280	300												
	50	184	217	214												
	60	85	137	116												
	70	44	70	50												
	80	18	22	20												
	90															
	100															
	110															
	120															
	130															
	140															
	150															
	160															
	170															
	180															