


日立照明器具 照明特性

形式：TM11207B-EN			反 射 率	天井 壁 床	80%			70%				50%			30%			0%		
					70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%		
					10%														0%	
					照明率 S/H=1.0															
姿図						0.6	0.42	0.33	0.27	0.41	0.32	0.27	0.23	0.32	0.27	0.23	0.31	0.26	0.23	0.21
						0.8	0.49	0.41	0.35	0.48	0.40	0.34	0.30	0.39	0.34	0.30	0.38	0.33	0.30	0.28
						1	0.54	0.46	0.40	0.53	0.45	0.40	0.36	0.44	0.39	0.35	0.43	0.39	0.35	0.34
						1.25	0.58	0.51	0.46	0.57	0.50	0.45	0.41	0.49	0.45	0.41	0.48	0.44	0.41	0.39
						1.5	0.62	0.55	0.50	0.61	0.54	0.50	0.46	0.53	0.49	0.45	0.52	0.48	0.45	0.43
						2	0.66	0.61	0.56	0.65	0.60	0.56	0.52	0.58	0.55	0.52	0.57	0.54	0.51	0.49
						2.5	0.69	0.64	0.60	0.67	0.63	0.59	0.56	0.62	0.58	0.56	0.60	0.57	0.55	0.53
						3	0.70	0.66	0.63	0.69	0.65	0.62	0.59	0.64	0.61	0.58	0.62	0.60	0.58	0.56
光 源						4	0.73	0.69	0.67	0.72	0.69	0.66	0.63	0.67	0.65	0.62	0.65	0.63	0.62	0.60
品名	蛍光ランプ					5	0.74	0.72	0.69	0.73	0.71	0.68	0.66	0.69	0.67	0.65	0.67	0.66	0.64	0.62
形式	FLR11HEX-N/A/100					7	0.76	0.74	0.72	0.75	0.73	0.72	0.70	0.72	0.70	0.69	0.70	0.69	0.68	0.66
光束	18,440 lm					10	0.77	0.76	0.75	0.76	0.75	0.74	0.73	0.74	0.73	0.72	0.72	0.71	0.70	0.68

器具効率 $F_t = 73.7\%$
 上方光束 $F_u = 0.0\%$
 下方光束 $F_d = 73.7\%$

配光分類

BZ-

最大取付間隔

A-A 1.42 H

B-B 1.28 H

保守率


良
中
否

0.74
0.70
0.62

光度 (cd/1000 lm)

	A-0	B-B	C-0
0	229	229	229
10	228	224	228
20	224	212	220
30	216	196	209
40	200	170	189
50	172	141	164
60	131	107	129
70	78	68	82
80	25	28	29
90			
100			
110			
120			
130			
140			
150			
160			
170			
180			

単体照度分布(初期)

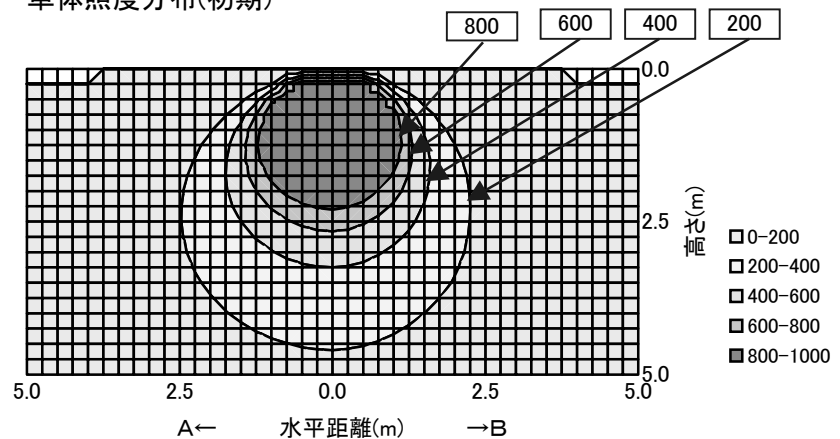

配光曲線

