

日立照明器具 照明特性


名称: 直管形LED搭載器具	反射率	天井	80%			70%				50%			30%			0%
		壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%
		床	10%													
形式: TME4122-JM14AE	室指数	照明率 S/H=1.0														
〈備考〉	0.6	0.49	0.38	0.31	0.48	0.38	0.31	0.26	0.37	0.31	0.26	0.36	0.30	0.26	0.24	
	0.8	0.58	0.47	0.40	0.56	0.46	0.39	0.34	0.45	0.39	0.34	0.44	0.38	0.34	0.32	
姿図 	1	0.64	0.53	0.46	0.62	0.53	0.46	0.40	0.51	0.45	0.40	0.50	0.44	0.40	0.38	
	1.25	0.69	0.60	0.53	0.67	0.59	0.52	0.47	0.57	0.51	0.47	0.55	0.50	0.46	0.44	
	1.5	0.73	0.65	0.58	0.71	0.64	0.57	0.52	0.62	0.56	0.52	0.60	0.55	0.51	0.49	
	2	0.78	0.71	0.65	0.77	0.70	0.65	0.60	0.68	0.64	0.60	0.66	0.62	0.59	0.57	
	2.5	0.81	0.75	0.70	0.80	0.74	0.69	0.65	0.72	0.68	0.65	0.70	0.67	0.64	0.61	
	3	0.84	0.78	0.74	0.82	0.77	0.73	0.69	0.75	0.71	0.68	0.73	0.70	0.67	0.65	
	光源	4	0.87	0.82	0.78	0.85	0.81	0.78	0.74	0.79	0.76	0.73	0.77	0.75	0.72	0.70
品名 直管形LEDランプ	5	0.89	0.85	0.82	0.87	0.84	0.81	0.78	0.82	0.79	0.77	0.80	0.78	0.76	0.73	
形式 LDK40SS・D/15/23NE	7	0.91	0.88	0.86	0.90	0.87	0.85	0.83	0.85	0.83	0.81	0.83	0.82	0.80	0.78	
光束 2,330 lm	10	0.93	0.91	0.89	0.91	0.90	0.88	0.87	0.88	0.86	0.85	0.86	0.85	0.84	0.81	

器具効率 F_t =	88.7%
上方光束 F_u =	0%
下方光束 F_d =	88.7%

最大取付間隔		
A-A	1.32	H
B-B	1.30	H
保守率	良	0.86
	中	0.81
	否	0.72

光 度 (cd/1000 lm)				3.0	
	A-0	B-B	C-0	A'-0	C'-0
0	266	266	266		
10	259	263	260		
20	248	251	247		
30	235	230	229		
40	216	202	207		
50	195	170	181		
60	171	128	148		
70	138	82	117		
80	42	35	67		
90					
100					
110					
120					
130					
140					
150					
160					
170					
180					

单体照度分布(初期値)

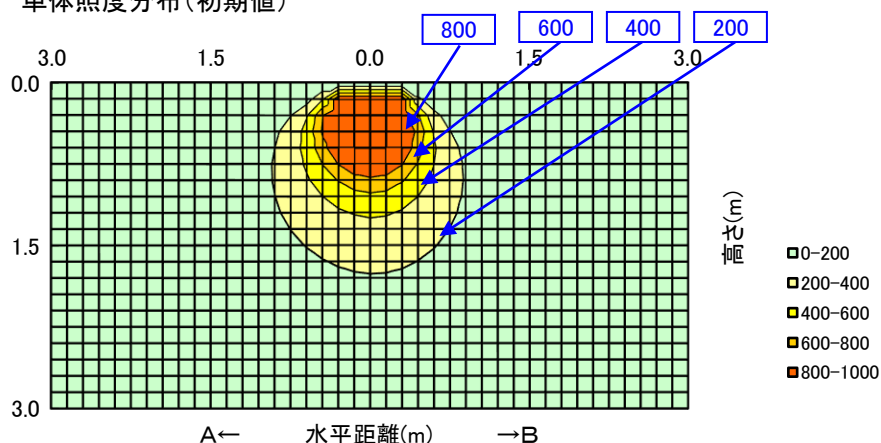

配光曲線
(cd/1000 lm)

