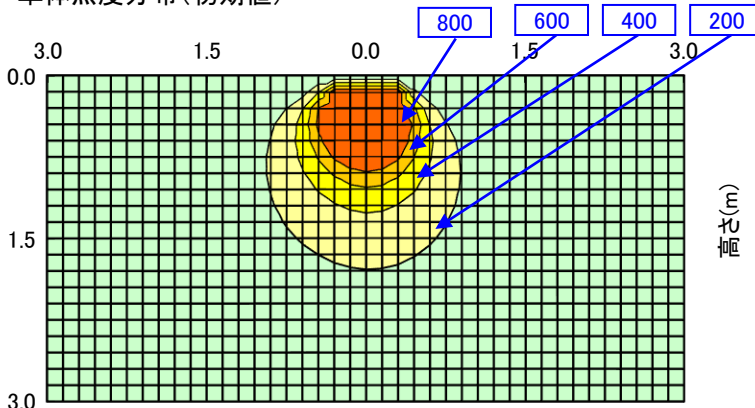
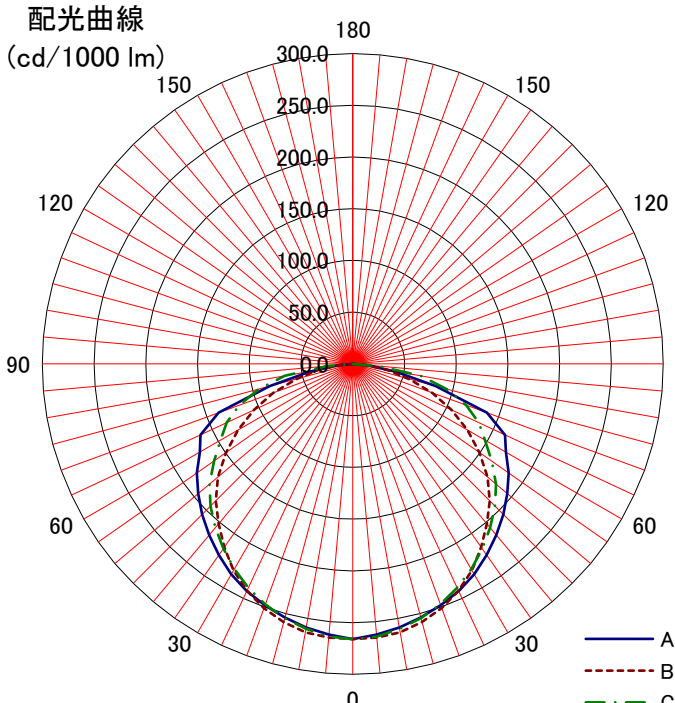


日立照明器具 照明特性

名称:直管形LED搭載器具		天井	80%			70%				50%			30%			0%																																																																																																																								
			壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%																																																																																																																							
																		床	10%														0%																																																																																																							
形式:TME4122-JM14AE		室指数	照明率 S/H=1.0																																																																																																																																					
<備考>		0.6	0.49	0.38	0.31	0.48	0.38	0.31	0.26	0.37	0.31	0.26	0.36	0.30	0.26	0.24																																																																																																																								
		0.8	0.58	0.47	0.40	0.56	0.46	0.39	0.34	0.45	0.39	0.34	0.44	0.38	0.34	0.32																																																																																																																								
姿図 		1	0.64	0.53	0.46	0.62	0.53	0.46	0.40	0.51	0.45	0.40	0.50	0.44	0.40	0.38																																																																																																																								
		1.25	0.69	0.60	0.53	0.67	0.59	0.52	0.47	0.57	0.51	0.47	0.55	0.50	0.46	0.44																																																																																																																								
		1.5	0.73	0.65	0.58	0.71	0.64	0.57	0.52	0.62	0.56	0.52	0.60	0.55	0.51	0.49																																																																																																																								
		2	0.78	0.71	0.65	0.77	0.70	0.65	0.60	0.68	0.64	0.60	0.66	0.62	0.59	0.57																																																																																																																								
		2.5	0.81	0.75	0.70	0.80	0.74	0.69	0.65	0.72	0.68	0.65	0.70	0.67	0.64	0.61																																																																																																																								
		3	0.84	0.78	0.74	0.82	0.77	0.73	0.69	0.75	0.71	0.68	0.73	0.70	0.67	0.65																																																																																																																								
光源		4	0.87	0.82	0.78	0.85	0.81	0.78	0.74	0.79	0.76	0.73	0.77	0.75	0.72	0.70																																																																																																																								
品名	直管形LEDランプ	5	0.89	0.85	0.82	0.87	0.84	0.81	0.78	0.82	0.79	0.77	0.80	0.78	0.76	0.73																																																																																																																								
形式	LDK40SS・N/15/24NE	7	0.91	0.88	0.86	0.90	0.87	0.85	0.83	0.85	0.83	0.81	0.83	0.82	0.80	0.78																																																																																																																								
光束	2,400 lm	10	0.93	0.91	0.89	0.91	0.90	0.88	0.87	0.88	0.86	0.85	0.86	0.85	0.84	0.81																																																																																																																								
器具効率 Ft= 88.7%			単体照度分布(初期値)  水平距離(m)																																																																																																																																					
上方光束 Fu= 0%																																																																																																																																								
下方光束 Fd= 88.7%																																																																																																																																								
最大取付間隔			配光曲線 (cd/1000 lm)  配光曲線 A B C-C'																																																																																																																																					
A-A 1.32 H																																																																																																																																								
B-B 1.30 H																																																																																																																																								
保守率																																																																																																																																								
良	0.86	光度 (cd/1000 lm) <table><thead><tr><th></th><th>A-0</th><th>B-B</th><th>C-0</th><th>A'-0</th><th>C'-0</th></tr></thead><tbody><tr><td>0</td><td>266</td><td>266</td><td>266</td><td></td><td></td></tr><tr><td>10</td><td>259</td><td>263</td><td>260</td><td></td><td></td></tr><tr><td>20</td><td>248</td><td>251</td><td>247</td><td></td><td></td></tr><tr><td>30</td><td>235</td><td>230</td><td>229</td><td></td><td></td></tr><tr><td>40</td><td>216</td><td>202</td><td>207</td><td></td><td></td></tr><tr><td>50</td><td>195</td><td>170</td><td>181</td><td></td><td></td></tr><tr><td>60</td><td>171</td><td>128</td><td>148</td><td></td><td></td></tr><tr><td>70</td><td>138</td><td>82</td><td>117</td><td></td><td></td></tr><tr><td>80</td><td>42</td><td>35</td><td>67</td><td></td><td></td></tr><tr><td>90</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>100</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>110</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>120</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>130</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>140</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>150</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>160</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>170</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>180</td><td></td><td></td><td></td><td></td><td></td></tr></tbody></table>																A-0	B-B	C-0	A'-0	C'-0	0	266	266	266			10	259	263	260			20	248	251	247			30	235	230	229			40	216	202	207			50	195	170	181			60	171	128	148			70	138	82	117			80	42	35	67			90						100						110						120						130						140						150						160						170						180					
	A-0																B-B	C-0	A'-0	C'-0																																																																																																																				
0	266																266	266																																																																																																																						
10	259																263	260																																																																																																																						
20	248																251	247																																																																																																																						
30	235																230	229																																																																																																																						
40	216																202	207																																																																																																																						
50	195																170	181																																																																																																																						
60	171																128	148																																																																																																																						
70	138																82	117																																																																																																																						
80	42	35	67																																																																																																																																					
90																																																																																																																																								
100																																																																																																																																								
110																																																																																																																																								
120																																																																																																																																								
130																																																																																																																																								
140																																																																																																																																								
150																																																																																																																																								
160																																																																																																																																								
170																																																																																																																																								
180																																																																																																																																								
中	0.81																																																																																																																																							
否	0.72																																																																																																																																							