
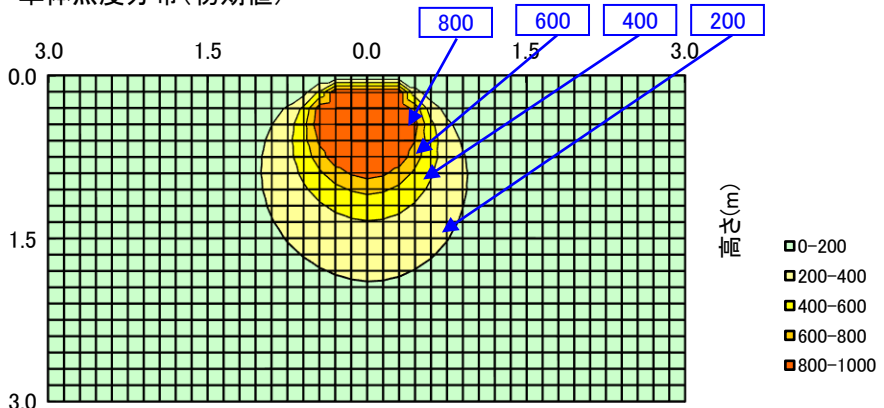
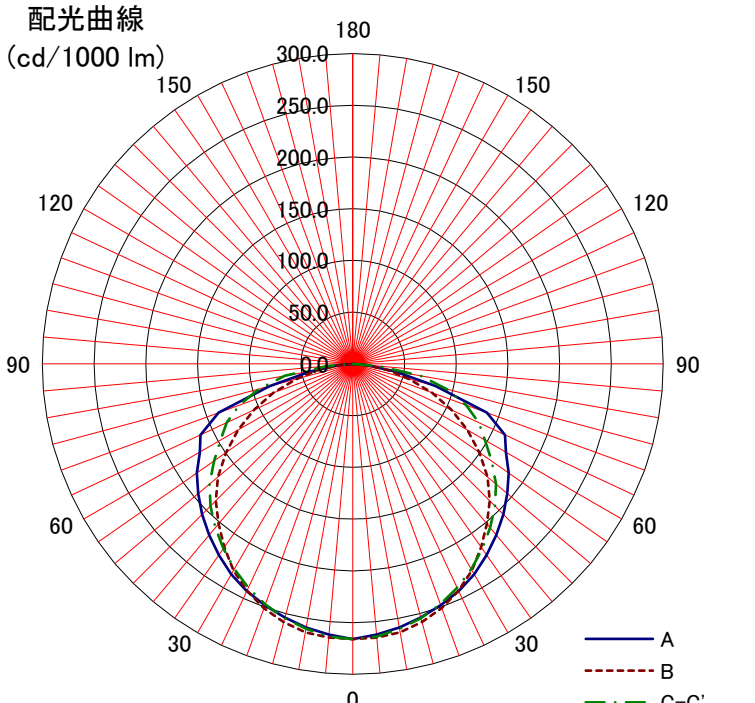


日立照明器具 照明特性																
名称: 直管形LED搭載器具	反射率	天井	80%			70%				50%			30%			0%
		壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%
		床	10%													0%
形式: TME4122-JM14AE	室指数	照明率 S/H=1.0														
〈備考〉	0.6	0.49	0.38	0.31	0.48	0.38	0.31	0.26	0.37	0.31	0.26	0.36	0.30	0.26	0.24	
	0.8	0.58	0.47	0.40	0.56	0.46	0.39	0.34	0.45	0.39	0.34	0.44	0.38	0.34	0.32	
姿図 	1	0.64	0.53	0.46	0.62	0.53	0.46	0.40	0.51	0.45	0.40	0.50	0.44	0.40	0.38	
	1.25	0.69	0.60	0.53	0.67	0.59	0.52	0.47	0.57	0.51	0.47	0.55	0.50	0.46	0.44	
	1.5	0.73	0.65	0.58	0.71	0.64	0.57	0.52	0.62	0.56	0.52	0.60	0.55	0.51	0.49	
	2	0.78	0.71	0.65	0.77	0.70	0.65	0.60	0.68	0.64	0.60	0.66	0.62	0.59	0.57	
	2.5	0.81	0.75	0.70	0.80	0.74	0.69	0.65	0.72	0.68	0.65	0.70	0.67	0.64	0.61	
	3	0.84	0.78	0.74	0.82	0.77	0.73	0.69	0.75	0.71	0.68	0.73	0.70	0.67	0.65	
	4	0.87	0.82	0.78	0.85	0.81	0.78	0.74	0.79	0.76	0.73	0.77	0.75	0.72	0.70	
光源	5	0.89	0.85	0.82	0.87	0.84	0.81	0.78	0.82	0.79	0.77	0.80	0.78	0.76	0.73	
品名 直管形LEDランプ	7	0.91	0.88	0.86	0.90	0.87	0.85	0.83	0.85	0.83	0.81	0.83	0.82	0.80	0.78	
形式 LDK40SS・N/17/27NE	10	0.93	0.91	0.89	0.91	0.90	0.88	0.87	0.88	0.86	0.85	0.86	0.85	0.84	0.81	
光束 2,700 lm																
器具効率 Ft= 88.7%		単体照度分布(初期値) 														
上方光束 Fu= 0%																
下方光束 Fd= 88.7%																
最大取付間隔																
A-A		1.32	H													
B-B		1.30	H													
保守率	良	0.86														
	中	0.81														
	否	0.72														
光度 (cd/1000 lm)		配光曲線 (cd/1000 lm) 														
	A-0	B-B	C-0	A'-0	C'-0											
0	266	266	266													
10	259	263	260													
20	248	251	247													
30	235	230	229													
40	216	202	207													
50	195	170	181													
60	171	128	148													
70	138	82	117													
80	42	35	67													
90																
100																
110																
120																
130																
140																
150																
160																
170																
180																