




日立照明器具 照明特性

形式: TME4122-PK14		反 射 率	天井	80%			70%				50%			30%			0%	
			壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%	
			床	10%														0%
			室指数	照明率 S/H=1.0														
姿図		0.6	0.56	0.43	0.35	0.54	0.43	0.35	0.30	0.42	0.34	0.29	0.40	0.34	0.29	0.27		
		0.8	0.65	0.53	0.45	0.64	0.52	0.45	0.39	0.51	0.44	0.39	0.50	0.43	0.38	0.36		
		1	0.72	0.60	0.52	0.70	0.59	0.52	0.46	0.58	0.51	0.45	0.56	0.50	0.45	0.43		
		1.25	0.78	0.67	0.59	0.76	0.66	0.59	0.53	0.64	0.58	0.53	0.63	0.57	0.52	0.50		
		1.5	0.82	0.73	0.65	0.81	0.72	0.65	0.59	0.70	0.64	0.59	0.68	0.62	0.58	0.56		
		2	0.88	0.80	0.74	0.87	0.79	0.73	0.68	0.77	0.72	0.67	0.75	0.70	0.66	0.64		
		2.5	0.92	0.85	0.79	0.90	0.84	0.78	0.74	0.82	0.77	0.73	0.79	0.75	0.72	0.69		
		3	0.94	0.88	0.83	0.93	0.87	0.82	0.78	0.85	0.81	0.77	0.83	0.79	0.76	0.73		
光 源		4	0.98	0.93	0.89	0.96	0.92	0.88	0.84	0.89	0.86	0.83	0.87	0.84	0.81	0.79		
品 名	LED直管ランプ	5	1.00	0.96	0.92	0.98	0.95	0.91	0.88	0.92	0.89	0.87	0.90	0.88	0.85	0.83		
形式	LDK40SS N/26L/24	7	1.03	1.00	0.97	1.01	0.98	0.96	0.94	0.96	0.94	0.92	0.94	0.92	0.90	0.87		
器具光束	2,130 lm	10	1.05	1.03	1.01	1.03	1.01	1.00	0.98	0.99	0.97	0.96	0.97	0.96	0.94	0.91		

器具効率 Ft= 100.0%		
上方光束 Fu= 0.0%		
下方光束 Fd= 100.0%		
配光分類		
BZ-		
最大取付間隔		
A-A	1.32	H
B-B	1.30	H
保守率	良	0.78
	中	0.74
	否	0.66

単体照度分布(初期)

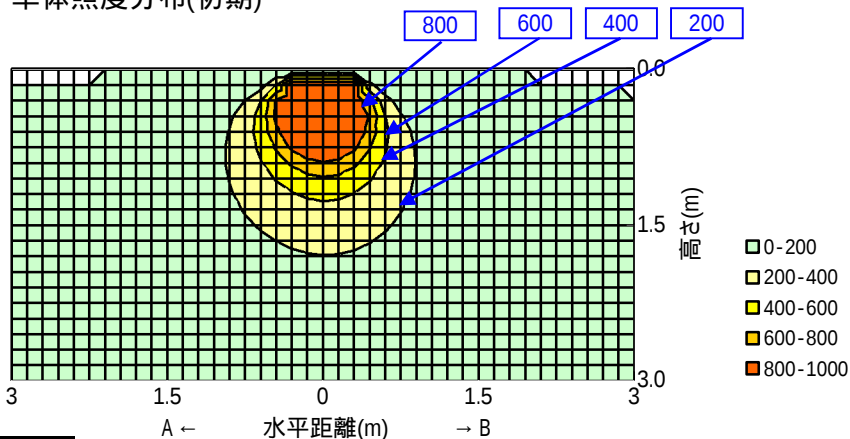

光度 (cd/1000 lm)					
	A-0	B-B	C-0	A'-0	C'-0
0	300	300	300		
10	292	297	293		
20	280	283	279		
30	265	260	258		
40	243	227	233		
50	220	192	204		
60	193	144	166		
70	156	92	132		
80	47	39	75		
90					
100					
110					
120					
130					
140					
150					
160					
170					
180					

配光曲線

