


日立照明器具 照明特性

形式: TME4142-J14A		反 射 率	天井	80%			70%				50%			30%			0%		
姿図 			壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%		
			床	10%															0%
			室指数	照明率 S/H=1.0															
光源		0.6	0.57	0.45	0.37	0.55	0.44	0.36	0.31	0.43	0.36	0.31	0.42	0.36	0.31	0.29			
		0.8	0.66	0.55	0.47	0.65	0.54	0.47	0.41	0.53	0.46	0.41	0.51	0.45	0.41	0.38			
		1	0.73	0.62	0.54	0.71	0.61	0.54	0.48	0.60	0.53	0.48	0.58	0.52	0.48	0.45			
		1.25	0.79	0.69	0.62	0.77	0.68	0.61	0.56	0.66	0.60	0.55	0.65	0.59	0.55	0.53			
		1.5	0.84	0.75	0.68	0.82	0.74	0.67	0.62	0.72	0.66	0.62	0.70	0.65	0.61	0.59			
		2	0.89	0.82	0.76	0.88	0.81	0.76	0.71	0.79	0.74	0.70	0.77	0.73	0.69	0.67			
		2.5	0.93	0.87	0.81	0.91	0.86	0.81	0.76	0.83	0.79	0.75	0.81	0.78	0.75	0.72			
		3	0.95	0.90	0.85	0.94	0.89	0.84	0.80	0.86	0.83	0.79	0.84	0.81	0.78	0.76			
光源		4	0.98	0.94	0.90	0.97	0.93	0.89	0.86	0.91	0.88	0.85	0.88	0.86	0.83	0.81			
品名	LED直管ランプ	5	1.00	0.97	0.94	0.99	0.96	0.93	0.90	0.93	0.91	0.88	0.91	0.89	0.87	0.84			
形式	LDK40SS-N/18/24	7	1.03	1.00	0.98	1.01	0.99	0.97	0.95	0.97	0.95	0.93	0.95	0.93	0.92	0.89			
器具光束	2,060 lm	10	1.04	1.03	1.01	1.03	1.02	1.00	0.99	0.99	0.98	0.97	0.97	0.96	0.95	0.92			

器具効率 Ft=	100.0%
上方光束 Fu=	0.0%
下方光束 Fd=	100.0%
配光分類	BZ-
最大取付間隔	
A-A	1.30 H
B-B	1.30 H
保守率	良 0.86 中 0.81 否 0.72

単体照度分布(初期)

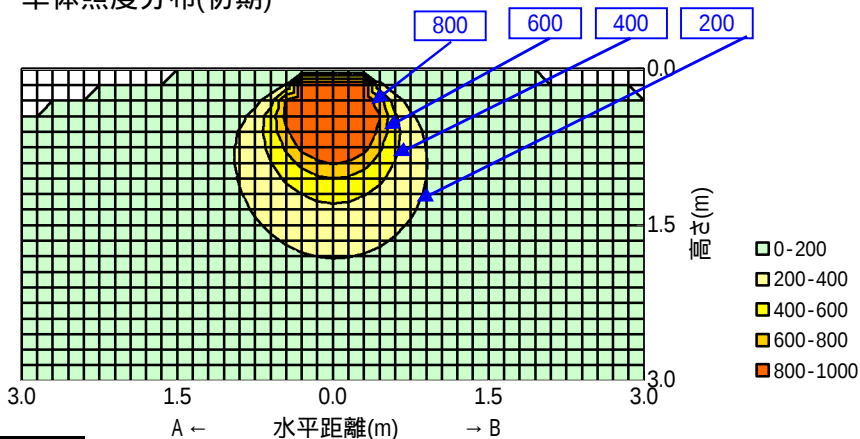

光度 (cd/1000 lm)	A-0	B-B	C-0	A'-0	C'-0
0	321	321	321		
10	314	319	315		
20	298	303	298		
30	279	280	274		
40	255	245	245		
50	230	206	211		
60	197	160	176		
70	96	97	124		
80	13	41	23		
90					
100					
110					
120					
130					
140					
150					
160					
170					
180					

配光曲線

