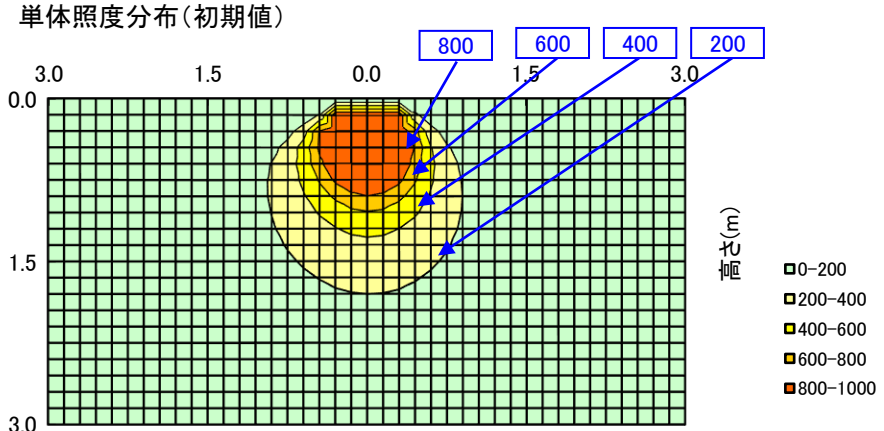
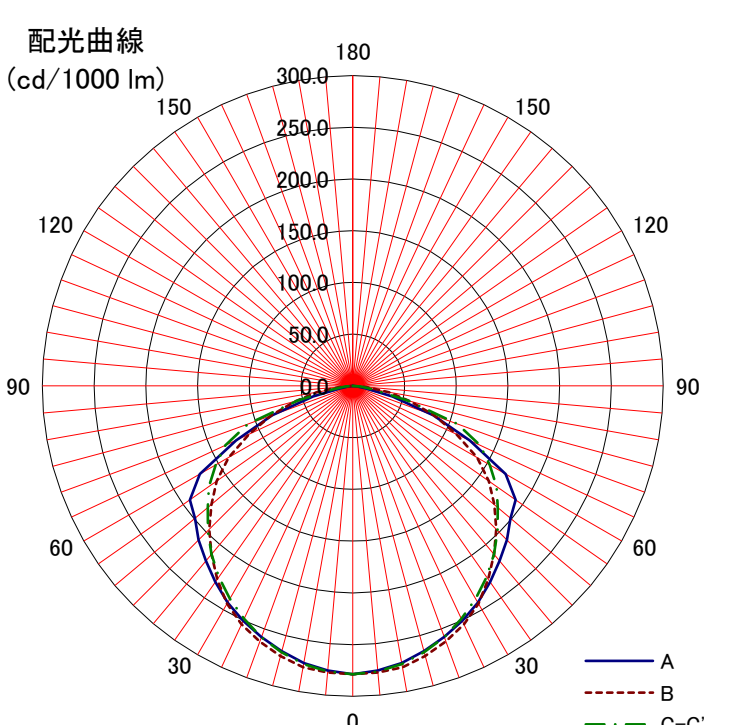


日立照明器具 照明特性																
名称: 直管形LED搭載器具	反射率	天井	80%			70%				50%			30%			0%
		壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%
		床	10%													0%
形式: TME4142-JM14AE	室指数	照明率 S/H=1.0														
<備考>	0.6	0.49	0.39	0.32	0.48	0.38	0.32	0.27	0.37	0.31	0.27	0.36	0.31	0.27	0.25	
	0.8	0.57	0.47	0.41	0.56	0.47	0.40	0.36	0.46	0.40	0.35	0.44	0.39	0.35	0.33	
姿図 	1	0.63	0.54	0.47	0.62	0.53	0.47	0.42	0.52	0.46	0.42	0.50	0.45	0.41	0.39	
	1.25	0.68	0.60	0.54	0.67	0.59	0.53	0.48	0.58	0.52	0.48	0.56	0.51	0.48	0.46	
	1.5	0.72	0.65	0.59	0.71	0.64	0.58	0.54	0.62	0.57	0.53	0.61	0.56	0.53	0.51	
	2	0.77	0.71	0.66	0.76	0.70	0.65	0.61	0.68	0.64	0.61	0.67	0.63	0.60	0.58	
	2.5	0.80	0.75	0.71	0.79	0.74	0.70	0.66	0.72	0.69	0.65	0.71	0.67	0.65	0.62	
	3	0.82	0.78	0.74	0.81	0.77	0.73	0.70	0.75	0.72	0.69	0.73	0.70	0.68	0.66	
	4	0.85	0.81	0.78	0.84	0.80	0.77	0.75	0.79	0.76	0.73	0.77	0.74	0.72	0.70	
光源	5	0.87	0.84	0.81	0.86	0.83	0.80	0.78	0.81	0.79	0.77	0.79	0.77	0.75	0.73	
品名 直管形LEDランプ	7	0.89	0.87	0.85	0.88	0.86	0.84	0.82	0.84	0.82	0.81	0.82	0.81	0.79	0.77	
形式 LDK40SS・D/15/23NE	10	0.91	0.89	0.88	0.89	0.88	0.87	0.85	0.86	0.85	0.84	0.84	0.83	0.82	0.80	
光束 2,330 lm																
器具効率 Ft= 86.1%		単体照度分布(初期値) 														
上方光束 Fu= 0%																
下方光束 Fd= 86.1%																
最大取付間隔		配光曲線 (cd/1000 lm) 														
A-A 1.30 H																
B-B 1.30 H																
保守率																
良	0.86															
中	0.81															
否	0.72															
光度 (cd/1000 lm)																
	A-0	B-B	C-0	A'-0	C'-0											
0	279	279	279													
10	272	276	273													
20	258	263	258													
30	242	243	238													
40	221	213	213													
50	199	178	183													
60	171	139	153													
70	83	84	108													
80	12	36	20													
90																
100																
110																
120																
130																
140																
150																
160																
170																
180																