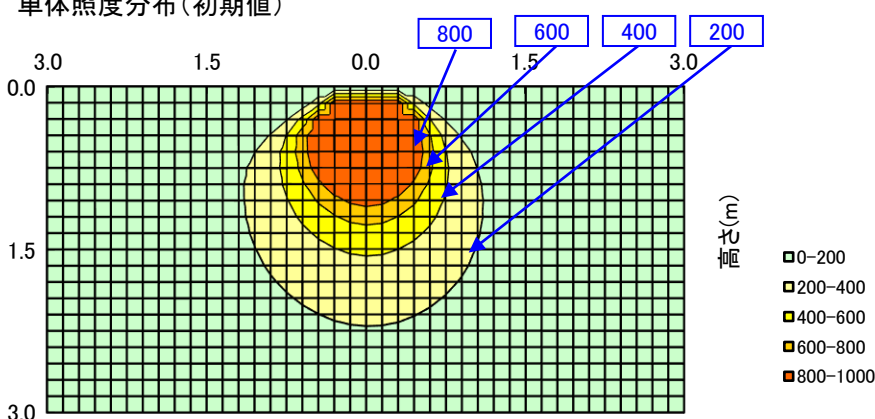
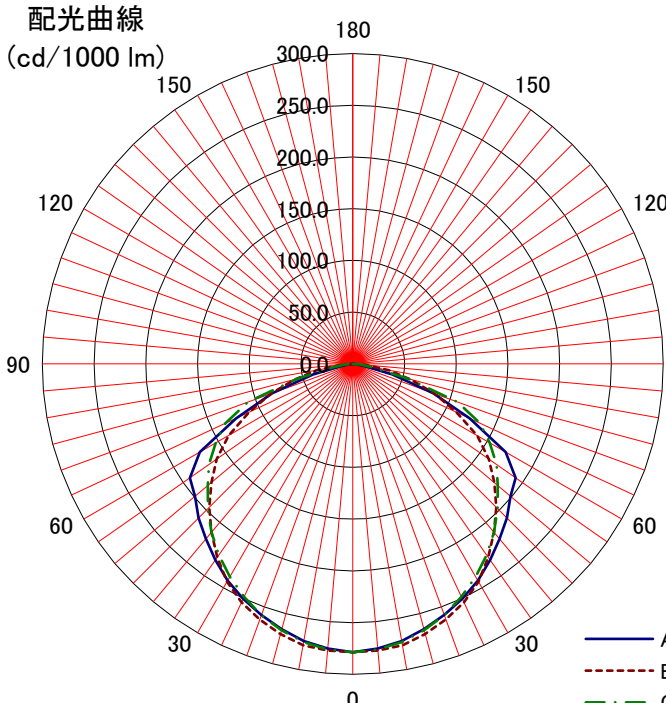


日立照明器具 照明特性																																																																																																																																								
名称: 直管形LED搭載器具	反射率	天井	80%			70%				50%			30%			0%																																																																																																																								
		壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%																																																																																																																								
形式: TME4142-JM14AE		床	10%														0%																																																																																																																							
<備考>	室指数	照明率 S/H=1.0																																																																																																																																						
		0.6	0.49	0.39	0.32	0.48	0.38	0.32	0.27	0.37	0.31	0.27	0.36	0.31	0.27	0.25																																																																																																																								
姿図 		0.8	0.57	0.47	0.41	0.56	0.47	0.40	0.36	0.46	0.40	0.35	0.44	0.39	0.35	0.33																																																																																																																								
	1	0.63	0.54	0.47	0.62	0.53	0.47	0.42	0.52	0.46	0.42	0.50	0.45	0.41	0.39																																																																																																																									
	1.25	0.68	0.60	0.54	0.67	0.59	0.53	0.48	0.58	0.52	0.48	0.56	0.51	0.48	0.46																																																																																																																									
	1.5	0.72	0.65	0.59	0.71	0.64	0.58	0.54	0.62	0.57	0.53	0.61	0.56	0.53	0.51																																																																																																																									
	2	0.77	0.71	0.66	0.76	0.70	0.65	0.61	0.68	0.64	0.61	0.67	0.63	0.60	0.58																																																																																																																									
	2.5	0.80	0.75	0.71	0.79	0.74	0.70	0.66	0.72	0.69	0.65	0.71	0.67	0.65	0.62																																																																																																																									
	3	0.82	0.78	0.74	0.81	0.77	0.73	0.70	0.75	0.72	0.69	0.73	0.70	0.68	0.66																																																																																																																									
光源	4	0.85	0.81	0.78	0.84	0.80	0.77	0.75	0.79	0.76	0.73	0.77	0.74	0.72	0.70																																																																																																																									
品名 直管形LEDランプ	5	0.87	0.84	0.81	0.86	0.83	0.80	0.78	0.81	0.79	0.77	0.79	0.77	0.75	0.73																																																																																																																									
形式 LDK40SS・D/22/34NE	7	0.89	0.87	0.85	0.88	0.86	0.84	0.82	0.84	0.82	0.81	0.82	0.81	0.79	0.77																																																																																																																									
光束 3,490 lm	10	0.91	0.89	0.88	0.89	0.88	0.87	0.85	0.86	0.85	0.84	0.84	0.83	0.82	0.80																																																																																																																									
器具効率 Ft= 86.1%		単体照度分布 (初期値) 																																																																																																																																						
上方光束 Fu= 0%																																																																																																																																								
下方光束 Fd= 86.1%																																																																																																																																								
最大取付間隔		配光曲線 (cd/1000 lm) 																																																																																																																																						
A-A 1.30 H																																																																																																																																								
B-B 1.30 H																																																																																																																																								
保守率																																																																																																																																								
良	0.86	<table><tr><th></th><th>A-0</th><th>B-B</th><th>C-0</th><th>A'-0</th><th>C'-0</th></tr><tr><td>0</td><td>279</td><td>279</td><td>279</td><td></td><td></td></tr><tr><td>10</td><td>272</td><td>276</td><td>273</td><td></td><td></td></tr><tr><td>20</td><td>258</td><td>263</td><td>258</td><td></td><td></td></tr><tr><td>30</td><td>242</td><td>243</td><td>238</td><td></td><td></td></tr><tr><td>40</td><td>221</td><td>213</td><td>213</td><td></td><td></td></tr><tr><td>50</td><td>199</td><td>178</td><td>183</td><td></td><td></td></tr><tr><td>60</td><td>171</td><td>139</td><td>153</td><td></td><td></td></tr><tr><td>70</td><td>83</td><td>84</td><td>108</td><td></td><td></td></tr><tr><td>80</td><td>12</td><td>36</td><td>20</td><td></td><td></td></tr><tr><td>90</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>100</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>110</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>120</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>130</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>140</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>150</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>160</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>170</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>180</td><td></td><td></td><td></td><td></td><td></td></tr></table>																A-0	B-B	C-0	A'-0	C'-0	0	279	279	279			10	272	276	273			20	258	263	258			30	242	243	238			40	221	213	213			50	199	178	183			60	171	139	153			70	83	84	108			80	12	36	20			90						100						110						120						130						140						150						160						170						180					
	A-0																B-B	C-0	A'-0	C'-0																																																																																																																				
0	279																279	279																																																																																																																						
10	272																276	273																																																																																																																						
20	258	263	258																																																																																																																																					
30	242	243	238																																																																																																																																					
40	221	213	213																																																																																																																																					
50	199	178	183																																																																																																																																					
60	171	139	153																																																																																																																																					
70	83	84	108																																																																																																																																					
80	12	36	20																																																																																																																																					
90																																																																																																																																								
100																																																																																																																																								
110																																																																																																																																								
120																																																																																																																																								
130																																																																																																																																								
140																																																																																																																																								
150																																																																																																																																								
160																																																																																																																																								
170																																																																																																																																								
180																																																																																																																																								
中	0.81																																																																																																																																							
否	0.72																																																																																																																																							