

日立照明器具 照明特性


名称: 直管形LED搭載器具	天井	80%			70%				50%			30%			0%	
		壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%
形式: TME4142-JM14AE	床	10%														0%
	室指数	照明率 S/H=1.0														
<備考>	0.6	0.49	0.39	0.32	0.48	0.38	0.32	0.27	0.37	0.31	0.27	0.36	0.31	0.27	0.25	
	0.8	0.57	0.47	0.41	0.56	0.47	0.40	0.36	0.46	0.40	0.35	0.44	0.39	0.35	0.33	
姿図 	1	0.63	0.54	0.47	0.62	0.53	0.47	0.42	0.52	0.46	0.42	0.50	0.45	0.41	0.39	
	1.25	0.68	0.60	0.54	0.67	0.59	0.53	0.48	0.58	0.52	0.48	0.56	0.51	0.48	0.46	
	1.5	0.72	0.65	0.59	0.71	0.64	0.58	0.54	0.62	0.57	0.53	0.61	0.56	0.53	0.51	
	2	0.77	0.71	0.66	0.76	0.70	0.65	0.61	0.68	0.64	0.61	0.67	0.63	0.60	0.58	
	2.5	0.80	0.75	0.71	0.79	0.74	0.70	0.66	0.72	0.69	0.65	0.71	0.67	0.65	0.62	
	3	0.82	0.78	0.74	0.81	0.77	0.73	0.70	0.75	0.72	0.69	0.73	0.70	0.68	0.66	
光源	4	0.85	0.81	0.78	0.84	0.80	0.77	0.75	0.79	0.76	0.73	0.77	0.74	0.72	0.70	
品名 直管形LEDランプ	5	0.87	0.84	0.81	0.86	0.83	0.80	0.78	0.81	0.79	0.77	0.79	0.77	0.75	0.73	
形式 LDK40SS-N/22/36NE	7	0.89	0.87	0.85	0.88	0.86	0.84	0.82	0.84	0.82	0.81	0.82	0.81	0.79	0.77	
光束 3,600 lm	10	0.91	0.89	0.88	0.89	0.88	0.87	0.85	0.86	0.85	0.84	0.84	0.83	0.82	0.80	

器具効率 Ft= 86.1%
 上方光束 Fu= 0%
 下方光束 Fd= 86.1%

最大取付間隔		
A-A	1.30	H
B-B	1.30	H
保守率	良	0.86
	中	0.81
	否	0.72

光度 (cd/1000 lm)					
	A-0	B-B	C-0	A'-0	C'-0
0	279	279	279		
10	272	276	273		
20	258	263	258		
30	242	243	238		
40	221	213	213		
50	199	178	183		
60	171	139	153		
70	83	84	108		
80	12	36	20		
90					
100					
110					
120					
130					
140					
150					
160					
170					
180					

単体照度分布(初期値)

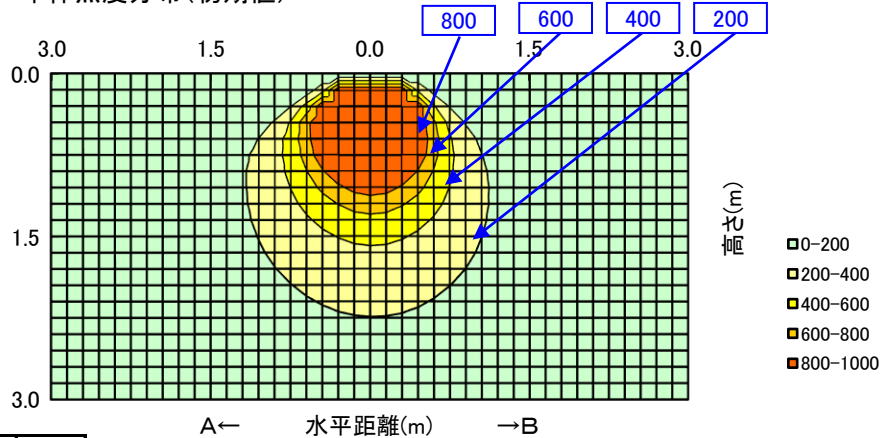

配光曲線
(cd/1000 lm)

