


日立照明器具 照明特性

形式: TME4142-PK14	反 射 率	天井 壁 床	80%			70%				50%			30%			0%
			70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%
			10%													
			照明率 S/H=1.0													
姿図 	0.6		0.57	0.45	0.37	0.55	0.44	0.36	0.31	0.43	0.36	0.31	0.42	0.36	0.31	0.29
	0.8		0.66	0.55	0.47	0.65	0.54	0.47	0.41	0.53	0.46	0.41	0.51	0.45	0.41	0.38
	1		0.73	0.62	0.54	0.71	0.61	0.54	0.48	0.60	0.53	0.48	0.58	0.52	0.48	0.45
	1.25		0.79	0.69	0.62	0.77	0.68	0.61	0.56	0.66	0.60	0.55	0.65	0.59	0.55	0.53
	1.5		0.84	0.75	0.68	0.82	0.74	0.67	0.62	0.72	0.66	0.62	0.70	0.65	0.61	0.59
	2		0.89	0.82	0.76	0.88	0.81	0.76	0.71	0.79	0.74	0.70	0.77	0.73	0.69	0.67
	2.5		0.93	0.87	0.81	0.91	0.86	0.81	0.76	0.83	0.79	0.75	0.81	0.78	0.75	0.72
	3		0.95	0.90	0.85	0.94	0.89	0.84	0.80	0.86	0.83	0.79	0.84	0.81	0.78	0.76
	4		0.98	0.94	0.90	0.97	0.93	0.89	0.86	0.91	0.88	0.85	0.88	0.86	0.83	0.81
	5		1.00	0.97	0.94	0.99	0.96	0.93	0.90	0.93	0.91	0.88	0.91	0.89	0.87	0.84
光源	LED直管ランプ															
品名	LDK40SS N/26L/24															
形式	LDK40SS N/26L/24															
器具光束	2,060 lm															
器具効率 Ft=	100.0%															
上方光束 Fu=	0.0%															
下方光束 Fd=	100.0%															
配光分類			BZ-													
最大取付間隔																
A-A			1.30 H													
B-B			1.30 H													
保守率	良		0.78													
	中		0.74													
	否		0.66													
光度 (cd/1000 lm)																
	A-0	B-B	C-0	A'-0	C'-0											
0	321	321	321													
10	314	319	315													
20	298	303	298													
30	279	280	274													
40	255	245	245													
50	230	206	211													
60	197	160	176													
70	96	97	124													
80	13	41	23													
90																
100																
110																
120																
130																
140																
150																
160																
170																
180																

単体照度分布(初期)

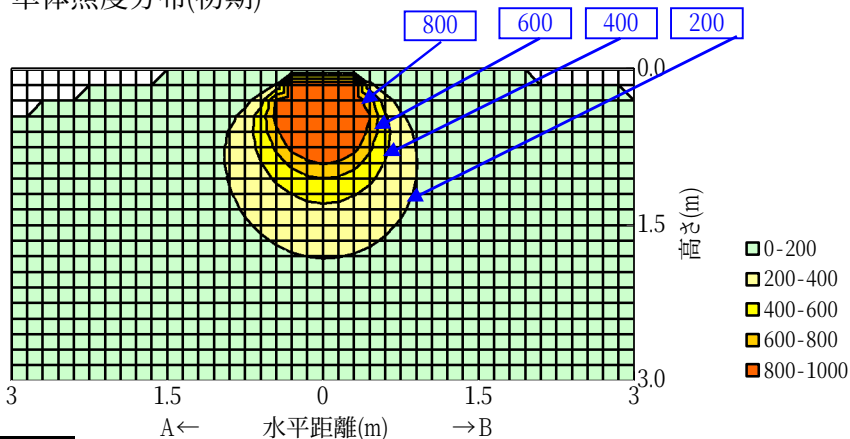

配光曲線

