

日立照明器具 照明特性


名称: 直管形LED搭載器具	反射率	天井	80%			70%			50%			30%			0%
		壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%
形式: TME4201-JM14AE	床	10%													
<備考> 姿図  光源 品名 直管形LEDランプ 形式 LDK40SS-D/15/23NE 光束 4,660 lm	室指数	照明率 S/H=1.0													
	0.6	0.51	0.40	0.33	0.50	0.39	0.32	0.27	0.38	0.32	0.27	0.37	0.31	0.27	0.25
	0.8	0.60	0.49	0.41	0.58	0.48	0.41	0.36	0.47	0.41	0.36	0.46	0.40	0.36	0.34
	1	0.65	0.55	0.48	0.64	0.54	0.48	0.42	0.53	0.47	0.42	0.52	0.46	0.42	0.40
	1.25	0.71	0.62	0.55	0.69	0.61	0.54	0.49	0.59	0.53	0.49	0.57	0.52	0.48	0.46
	1.5	0.75	0.67	0.60	0.73	0.66	0.60	0.55	0.64	0.59	0.54	0.62	0.58	0.54	0.51
	2	0.80	0.73	0.68	0.79	0.72	0.67	0.62	0.70	0.66	0.62	0.69	0.65	0.61	0.59
	2.5	0.83	0.77	0.72	0.82	0.76	0.72	0.68	0.74	0.70	0.67	0.73	0.69	0.66	0.64
	3	0.86	0.80	0.76	0.84	0.79	0.75	0.71	0.77	0.74	0.70	0.75	0.72	0.69	0.67
	4	0.89	0.84	0.81	0.87	0.83	0.80	0.77	0.81	0.78	0.75	0.79	0.77	0.74	0.72
5	0.90	0.87	0.84	0.89	0.86	0.83	0.80	0.84	0.81	0.79	0.82	0.80	0.78	0.75	
7	0.93	0.90	0.88	0.91	0.89	0.87	0.85	0.87	0.85	0.83	0.85	0.84	0.82	0.80	
10	0.94	0.93	0.91	0.93	0.92	0.90	0.89	0.90	0.88	0.87	0.88	0.87	0.86	0.83	

器具効率 Ft= 90.2%
 上方光束 Fu= 0%
 下方光束 Fd= 90.2%

最大取付間隔		
A-A	1.32	H
B-B	1.28	H
保守率	良	0.86
	中	0.81
	否	0.72

光度 (cd/1000 lm)					
	A-0	B-B	C-0	A'-0	C'-0
0	278	278	278		
10	277	274	276		
20	264	264	265		
30	245	240	241		
40	226	209	214		
50	203	177	187		
60	171	134	158		
70	98	83	114		
80	50	34	52		
90					
100					
110					
120					
130					
140					
150					
160					
170					
180					

単体照度分布(初期値)

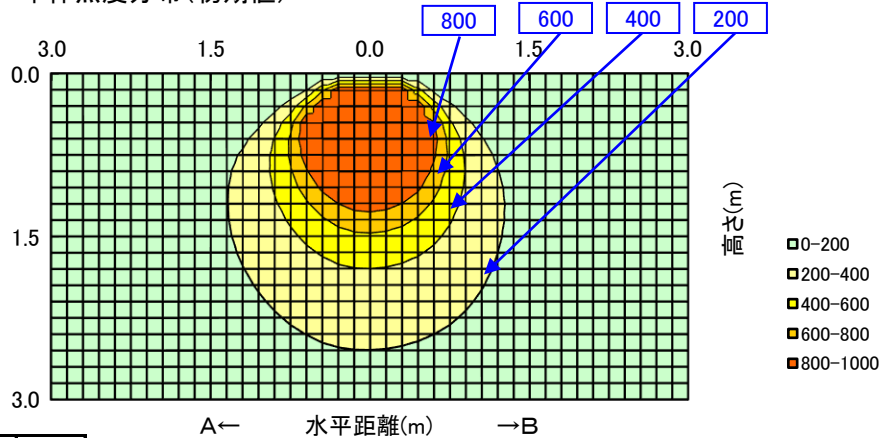

配光曲線
(cd/1000 lm)

