
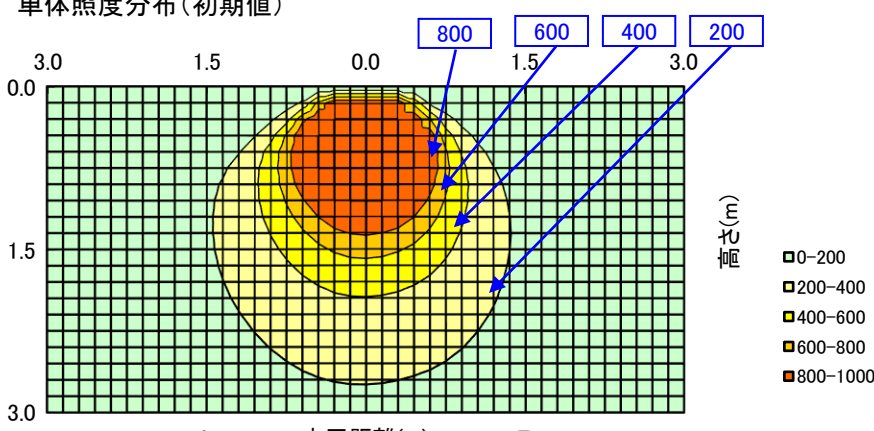
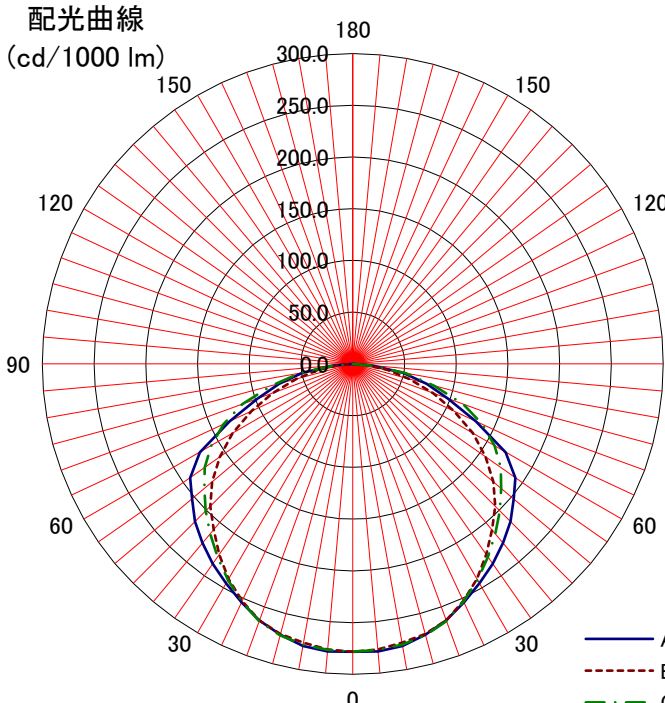
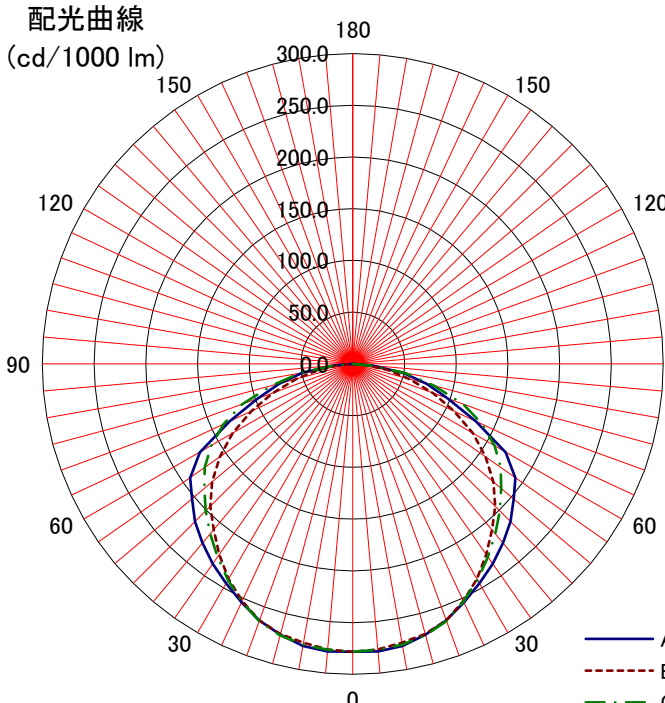


日立照明器具 照明特性																				
名称: 直管形LED搭載器具	反射率	天井	80%			70%				50%			30%			0%				
		壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%				
形式: TME4201-JM14AE		床	10%													0%				
	室指数	照明率 S/H=1.0																		
<備考>	0.6	0.51	0.40	0.33	0.50	0.39	0.32	0.27	0.38	0.32	0.27	0.37	0.31	0.27	0.25					
	0.8	0.60	0.49	0.41	0.58	0.48	0.41	0.36	0.47	0.41	0.36	0.46	0.40	0.36	0.34					
姿図 	1	0.65	0.55	0.48	0.64	0.54	0.48	0.42	0.53	0.47	0.42	0.52	0.46	0.42	0.40					
	1.25	0.71	0.62	0.55	0.69	0.61	0.54	0.49	0.59	0.53	0.49	0.57	0.52	0.48	0.46					
	1.5	0.75	0.67	0.60	0.73	0.66	0.60	0.55	0.64	0.59	0.54	0.62	0.58	0.54	0.51					
	2	0.80	0.73	0.68	0.79	0.72	0.67	0.62	0.70	0.66	0.62	0.69	0.65	0.61	0.59					
	2.5	0.83	0.77	0.72	0.82	0.76	0.72	0.68	0.74	0.70	0.67	0.73	0.69	0.66	0.64					
	3	0.86	0.80	0.76	0.84	0.79	0.75	0.71	0.77	0.74	0.70	0.75	0.72	0.69	0.67					
	4	0.89	0.84	0.81	0.87	0.83	0.80	0.77	0.81	0.78	0.75	0.79	0.77	0.74	0.72					
光源	4	0.89	0.84	0.81	0.87	0.83	0.80	0.77	0.81	0.78	0.75	0.79	0.77	0.74	0.72					
品名 直管形LEDランプ	5	0.90	0.87	0.84	0.89	0.86	0.83	0.80	0.84	0.81	0.79	0.82	0.80	0.78	0.75					
形式 LDK40SS・N/17/27NE	7	0.93	0.90	0.88	0.91	0.89	0.87	0.85	0.87	0.85	0.83	0.85	0.84	0.82	0.80					
光束 5,400 lm	10	0.94	0.93	0.91	0.93	0.92	0.90	0.89	0.90	0.88	0.87	0.88	0.87	0.86	0.83					
器具効率 Ft= 90.2%		単体照度分布 (初期値) 																		
上方光束 Fu= 0%																				
下方光束 Fd= 90.2%																				
最大取付間隔		配光曲線 (cd/1000 lm) 																		
A-A 1.32 H																				
B-B 1.28 H																				
保守率	良																0.86			
	中																0.81			
	否																0.72			
光度 (cd/1000 lm)																	配光曲線 (cd/1000 lm) 			
	A-0	B-B	C-0	A'-0	C'-0															
0	278	278	278																	
10	277	274	276																	
20	264	264	265																	
30	245	240	241																	
40	226	209	214																	
50	203	177	187																	
60	171	134	158																	
70	98	83	114																	
80	50	34	52																	
90																				
100																				
110																				
120																				
130																				
140																				
150																				
160																				
170																				
180																				