
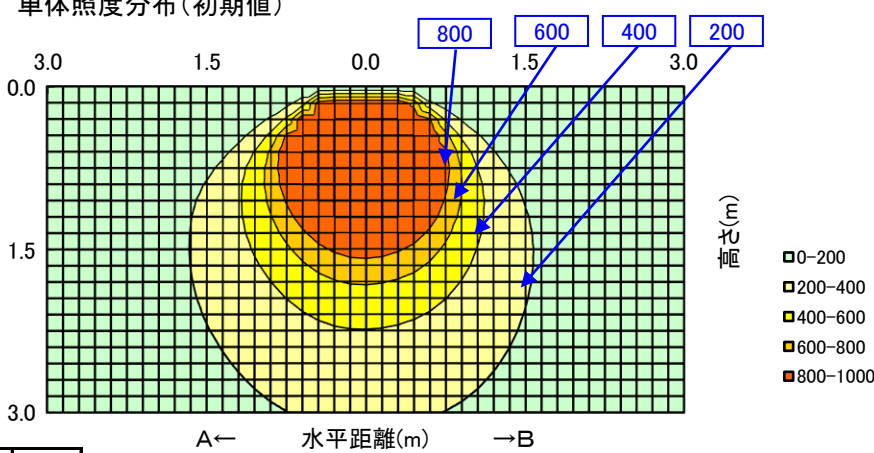
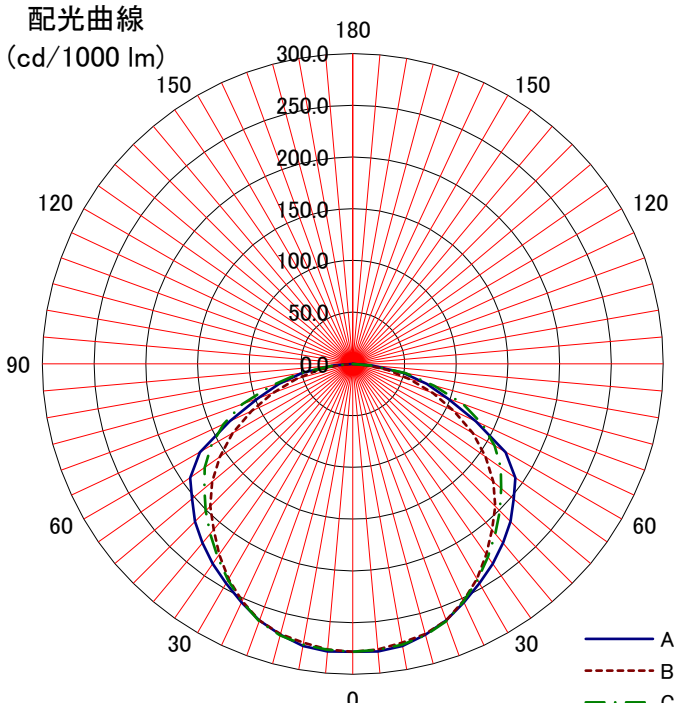


日立照明器具 照明特性																	
名称: 直管形LED搭載器具	反射率	天井	80%			70%				50%			30%			0%	
		壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%	
形式: TME4201-JM14AE		床	10%														0%
姿図 	室指数	照明率 S/H=1.0															
	0.6	0.51	0.40	0.33	0.50	0.39	0.32	0.27	0.38	0.32	0.27	0.37	0.31	0.27	0.25		
	0.8	0.60	0.49	0.41	0.58	0.48	0.41	0.36	0.47	0.41	0.36	0.46	0.40	0.36	0.34		
	1	0.65	0.55	0.48	0.64	0.54	0.48	0.42	0.53	0.47	0.42	0.52	0.46	0.42	0.40		
	1.25	0.71	0.62	0.55	0.69	0.61	0.54	0.49	0.59	0.53	0.49	0.57	0.52	0.48	0.46		
	1.5	0.75	0.67	0.60	0.73	0.66	0.60	0.55	0.64	0.59	0.54	0.62	0.58	0.54	0.51		
	2	0.80	0.73	0.68	0.79	0.72	0.67	0.62	0.70	0.66	0.62	0.69	0.65	0.61	0.59		
	2.5	0.83	0.77	0.72	0.82	0.76	0.72	0.68	0.74	0.70	0.67	0.73	0.69	0.66	0.64		
	3	0.86	0.80	0.76	0.84	0.79	0.75	0.71	0.77	0.74	0.70	0.75	0.72	0.69	0.67		
	4	0.89	0.84	0.81	0.87	0.83	0.80	0.77	0.81	0.78	0.75	0.79	0.77	0.74	0.72		
光源	5	0.90	0.87	0.84	0.89	0.86	0.83	0.80	0.84	0.81	0.79	0.82	0.80	0.78	0.75		
品名 直管形LEDランプ	7	0.93	0.90	0.88	0.91	0.89	0.87	0.85	0.87	0.85	0.83	0.85	0.84	0.82	0.80		
形式 LDK40SS・N/22/36NE	10	0.94	0.93	0.91	0.93	0.92	0.90	0.89	0.90	0.88	0.87	0.88	0.87	0.86	0.83		
光束 7,200 lm																	
器具効率 Ft= 90.2%		単体照度分布 (初期値) 															
上方光束 Fu= 0%																	
下方光束 Fd= 90.2%																	
最大取付間隔																	
A-A 1.32 H																	
B-B 1.28 H																	
保守率	良	0.86															
	中	0.81															
	否	0.72															
光度 (cd/1000 lm)		配光曲線 (cd/1000 lm) 															
	A-0	B-B	C-0	A'-0	C'-0												
0	278	278	278														
10	277	274	276														
20	264	264	265														
30	245	240	241														
40	226	209	214														
50	203	177	187														
60	171	134	158														
70	98	83	114														
80	50	34	52														
90																	
100																	
110																	
120																	
130																	
140																	
150																	
160																	
170																	
180																	