



日立照明器具 照明特性

形式: TME4201-PK14	天井 反射率 壁 床 室指数	80%			70%				50%			30%			0%
		70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%
		10%													
		照明率 S/H=1.0													
姿図 	0.6	0.56	0.44	0.36	0.55	0.43	0.36	0.30	0.42	0.35	0.30	0.41	0.35	0.30	0.28
	0.8	0.66	0.54	0.46	0.64	0.53	0.46	0.40	0.52	0.45	0.40	0.51	0.44	0.39	0.37
	1	0.72	0.61	0.53	0.71	0.60	0.53	0.47	0.59	0.52	0.47	0.57	0.51	0.46	0.44
	1.25	0.79	0.68	0.61	0.77	0.67	0.60	0.54	0.65	0.59	0.54	0.64	0.58	0.53	0.51
	1.5	0.83	0.74	0.67	0.81	0.73	0.66	0.61	0.71	0.65	0.60	0.69	0.64	0.59	0.57
	2	0.89	0.81	0.75	0.87	0.80	0.74	0.69	0.78	0.73	0.68	0.76	0.72	0.68	0.65
	2.5	0.93	0.86	0.80	0.91	0.85	0.79	0.75	0.82	0.78	0.74	0.80	0.76	0.73	0.70
	3	0.95	0.89	0.84	0.93	0.88	0.83	0.79	0.86	0.82	0.78	0.83	0.80	0.77	0.74
	4	0.98	0.93	0.89	0.97	0.92	0.88	0.85	0.90	0.87	0.84	0.88	0.85	0.82	0.80
	5	1.00	0.96	0.93	0.99	0.95	0.92	0.89	0.93	0.90	0.88	0.91	0.88	0.86	0.83
光源	4	0.98	0.93	0.89	0.97	0.92	0.88	0.85	0.90	0.87	0.84	0.88	0.85	0.82	0.80
品名 LED直管ランプ	5	1.00	0.96	0.93	0.99	0.95	0.92	0.89	0.93	0.90	0.88	0.91	0.88	0.86	0.83
形式 LDK40SS N/26L/24	7	1.03	1.00	0.97	1.01	0.99	0.96	0.94	0.97	0.94	0.93	0.94	0.93	0.91	0.88
器具光束: 4,330 lm	10	1.05	1.03	1.01	1.03	1.02	1.00	0.98	0.99	0.98	0.97	0.97	0.96	0.95	0.92

器具効率 Ft=	100.0%
上方光束 Fu=	0.0%
下方光束 Fd=	100.0%
配光分類	BZ-
最大取付間隔	
A-A	1.32 H
B-B	1.28 H
保守率	良 0.78 中 0.74 否 0.66

単体照度分布(初期)

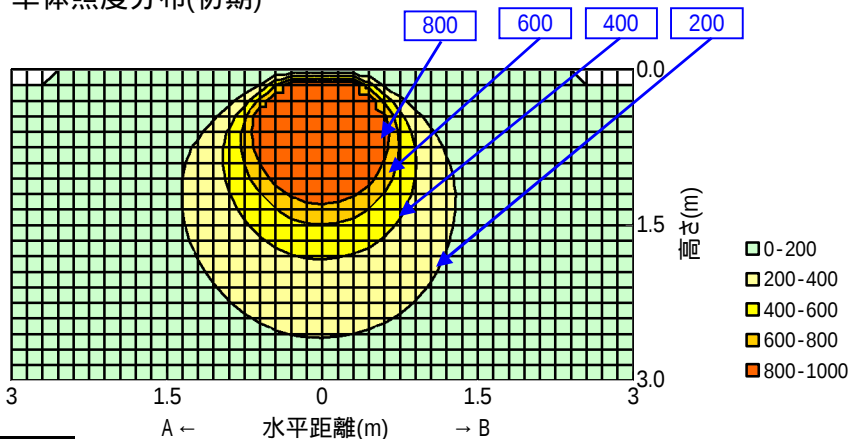

光度 (cd/1000 lm)	A-0	B-B	C-0	A'-0	C'-0
0	308	308	308		
10	306	303	305		
20	292	292	293		
30	271	266	267		
40	250	232	237		
50	225	196	207		
60	189	149	175		
70	109	92	126		
80	55	38	58		
90					
100					
110					
120					
130					
140					
150					
160					
170					
180					

配光曲線

