


日立照明器具 照明特性

形式: TME4222-J14A		反 射 率	天井	80%			70%				50%			30%			0%		
			壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%		
			床	10%															0%
			室指数	照明率 S/H=1.0															
姿図			0.6	0.56	0.44	0.36	0.55	0.43	0.36	0.30	0.42	0.35	0.30	0.41	0.35	0.30	0.28		
			0.8	0.66	0.54	0.46	0.64	0.53	0.45	0.40	0.52	0.45	0.39	0.50	0.44	0.39	0.37		
			1	0.72	0.61	0.53	0.71	0.60	0.53	0.47	0.59	0.52	0.46	0.57	0.51	0.46	0.44		
			1.25	0.78	0.68	0.60	0.77	0.67	0.60	0.54	0.65	0.59	0.54	0.64	0.58	0.53	0.51		
			1.5	0.83	0.74	0.66	0.81	0.73	0.66	0.60	0.71	0.65	0.60	0.69	0.64	0.59	0.57		
			2	0.89	0.81	0.75	0.87	0.80	0.74	0.69	0.78	0.73	0.68	0.76	0.71	0.68	0.65		
			2.5	0.93	0.86	0.80	0.91	0.85	0.79	0.75	0.82	0.78	0.74	0.80	0.76	0.73	0.70		
			3	0.95	0.89	0.84	0.93	0.88	0.83	0.79	0.86	0.82	0.78	0.83	0.80	0.77	0.74		
光 源			4	0.98	0.94	0.89	0.97	0.92	0.88	0.85	0.90	0.87	0.84	0.88	0.85	0.82	0.80		
品名	LED直管ランプ		5	1.00	0.96	0.93	0.99	0.95	0.92	0.89	0.93	0.90	0.88	0.91	0.88	0.86	0.83		
形式	LDK40SS N/18/24		7	1.03	1.00	0.98	1.02	0.99	0.96	0.94	0.97	0.95	0.93	0.94	0.93	0.91	0.88		
器具光束	4,220 lm		10	1.05	1.03	1.01	1.04	1.02	1.00	0.98	0.99	0.98	0.97	0.97	0.96	0.95	0.92		

単体照度分布(初期)

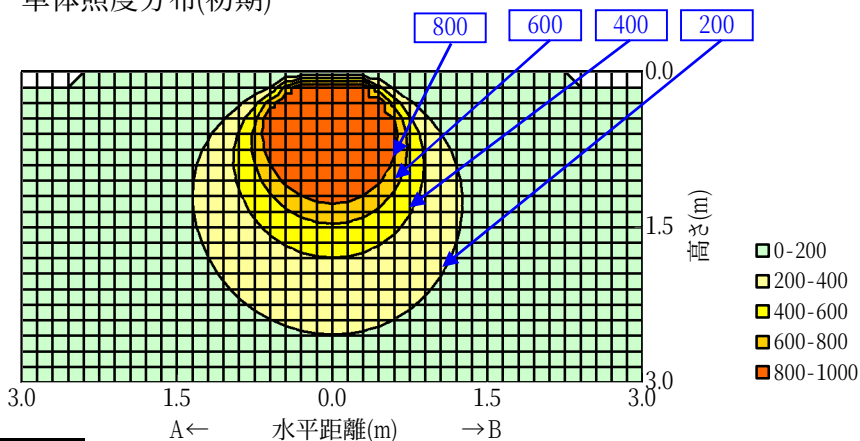

配光曲線

