

日立照明器具 照明特性


名称:直管形LED搭載器具	反 射 率	天井	80%			70%				50%			30%			0%
		壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%
		床	10%													
形式:TME4222-XM14E	室指数	照明率 S/H=1.0														
＜備考＞	0.6	0.49	0.38	0.31	0.48	0.38	0.31	0.27	0.37	0.31	0.26	0.36	0.30	0.26	0.25	
	0.8	0.58	0.47	0.40	0.56	0.47	0.40	0.35	0.45	0.39	0.35	0.44	0.39	0.34	0.33	
姿図 	1	0.64	0.54	0.47	0.62	0.53	0.46	0.41	0.51	0.45	0.41	0.50	0.45	0.40	0.38	
	1.25	0.69	0.60	0.53	0.67	0.59	0.53	0.48	0.57	0.52	0.47	0.56	0.51	0.47	0.45	
	1.5	0.73	0.65	0.58	0.71	0.64	0.58	0.53	0.62	0.57	0.52	0.60	0.56	0.52	0.50	
	2	0.78	0.71	0.66	0.77	0.70	0.65	0.61	0.68	0.64	0.60	0.67	0.63	0.59	0.57	
	2.5	0.81	0.75	0.70	0.80	0.74	0.70	0.66	0.72	0.68	0.65	0.71	0.67	0.64	0.62	
	3	0.83	0.78	0.74	0.82	0.77	0.73	0.69	0.75	0.72	0.68	0.73	0.70	0.67	0.65	
	4	0.86	0.82	0.78	0.85	0.81	0.78	0.75	0.79	0.76	0.73	0.77	0.75	0.72	0.70	
光源	5	0.88	0.85	0.82	0.87	0.84	0.81	0.78	0.82	0.79	0.77	0.80	0.78	0.76	0.73	
品名直管形LEDランプ	7	0.90	0.88	0.86	0.89	0.87	0.85	0.83	0.85	0.83	0.81	0.83	0.81	0.80	0.77	
形式LDK40SS・D/17/26NE	10	0.92	0.90	0.89	0.91	0.89	0.88	0.86	0.87	0.86	0.85	0.85	0.84	0.83	0.81	
光束5,240 lm																

器具効率 Ft=	88.0%
上方光束 Fu=	0%
下方光束 Fd=	88.0%

最大取付間隔		
A-A	1.34	H
B-B	1.28	H
保守率	良	0.86
	中	0.81
	否	0.72

光度 (cd/1000 lm)					
	A-0	B-B	C-0	A'-0	C'-0
0	268	268	268		
10	264	264	264		
20	255	252	253		
30	239	230	235		
40	220	201	209		
50	201	167	185		
60	168	125	154		
70	114	76	112		
80	42	34	54		
90					
100					
110					
120					
130					
140					
150					
160					
170					
180					

単体照度分布(初期値)

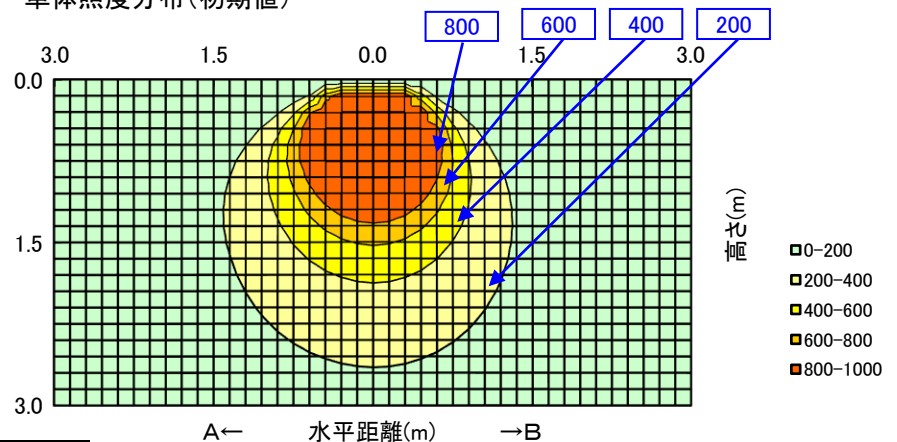

配光曲線
(cd/1000 lm)

