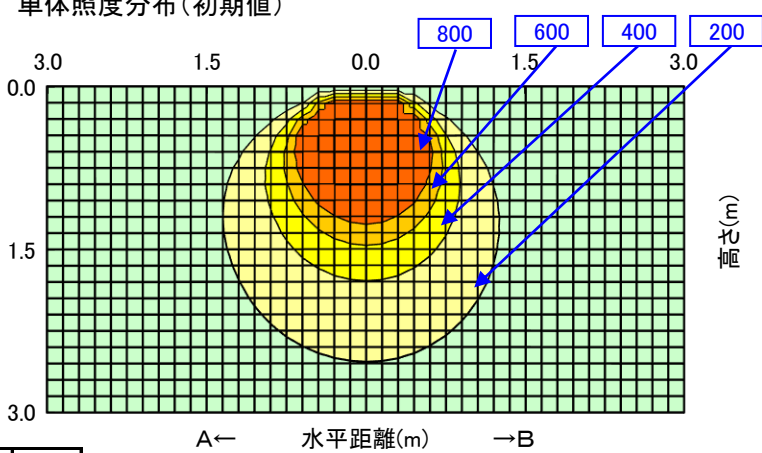
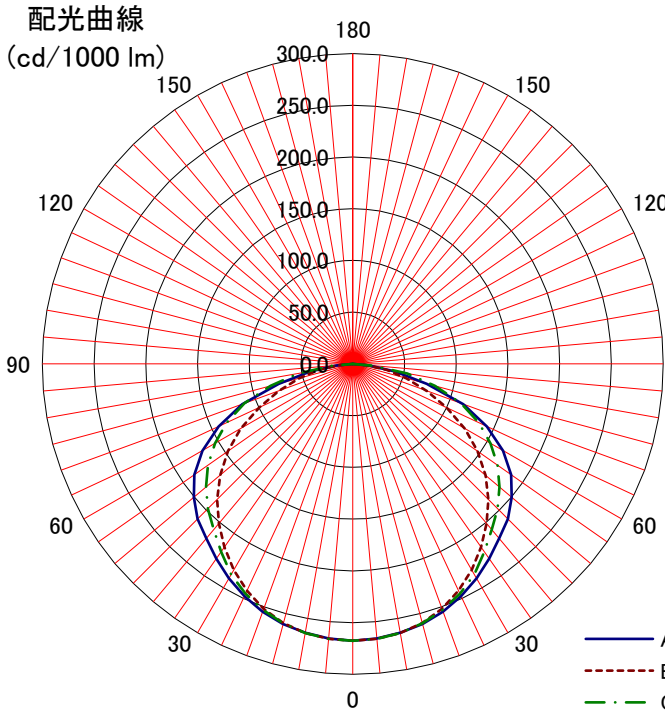


日立照明器具 照明特性																
名称: 直管形LED搭載器具	反射率	天井	80%			70%				50%			30%			0%
		壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%
		床	10%													0%
形式: TME4222-XM14E	室指数	照明率 S/H=1.0														
<備考>	0.6	0.49	0.38	0.31	0.48	0.38	0.31	0.27	0.37	0.31	0.26	0.36	0.30	0.26	0.25	
	0.8	0.58	0.47	0.40	0.56	0.47	0.40	0.35	0.45	0.39	0.35	0.44	0.39	0.34	0.33	
姿図 	1	0.64	0.54	0.47	0.62	0.53	0.46	0.41	0.51	0.45	0.41	0.50	0.45	0.40	0.38	
	1.25	0.69	0.60	0.53	0.67	0.59	0.53	0.48	0.57	0.52	0.47	0.56	0.51	0.47	0.45	
	1.5	0.73	0.65	0.58	0.71	0.64	0.58	0.53	0.62	0.57	0.52	0.60	0.56	0.52	0.50	
	2	0.78	0.71	0.66	0.77	0.70	0.65	0.61	0.68	0.64	0.60	0.67	0.63	0.59	0.57	
	2.5	0.81	0.75	0.70	0.80	0.74	0.70	0.66	0.72	0.68	0.65	0.71	0.67	0.64	0.62	
	3	0.83	0.78	0.74	0.82	0.77	0.73	0.69	0.75	0.72	0.68	0.73	0.70	0.67	0.65	
光源	4	0.86	0.82	0.78	0.85	0.81	0.78	0.75	0.79	0.76	0.73	0.77	0.75	0.72	0.70	
品名 直管形LEDランプ	5	0.88	0.85	0.82	0.87	0.84	0.81	0.78	0.82	0.79	0.77	0.80	0.78	0.76	0.73	
形式 LDK40SS・N/15/24NE	7	0.90	0.88	0.86	0.89	0.87	0.85	0.83	0.85	0.83	0.81	0.83	0.81	0.80	0.77	
光束 4,800 lm	10	0.92	0.90	0.89	0.91	0.89	0.88	0.86	0.87	0.86	0.85	0.85	0.84	0.83	0.81	
器具効率 Ft= 88.0%		単体照度分布(初期値) 														
上方光束 Fu= 0%																
下方光束 Fd= 88.0%																
最大取付間隔																
A-A		1.34	H													
B-B		1.28	H													
保守率	良	0.86														
	中	0.81														
	否	0.72														
光度 (cd/1000 lm)		配光曲線 (cd/1000 lm) 														
	A-0	B-B	C-0	A'-0	C'-0											
0	268	268	268													
10	264	264	264													
20	255	252	253													
30	239	230	235													
40	220	201	209													
50	201	167	185													
60	168	125	154													
70	114	76	112													
80	42	34	54													
90																
100																
110																
120																
130																
140																
150																
160																
170																
180																