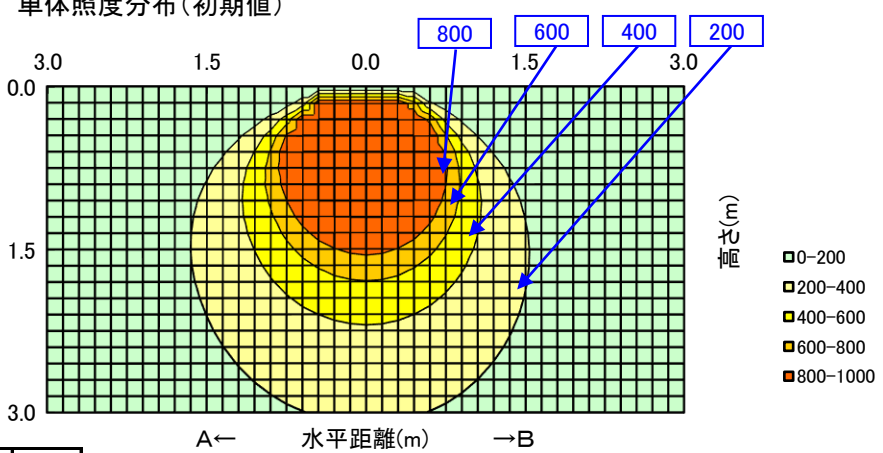
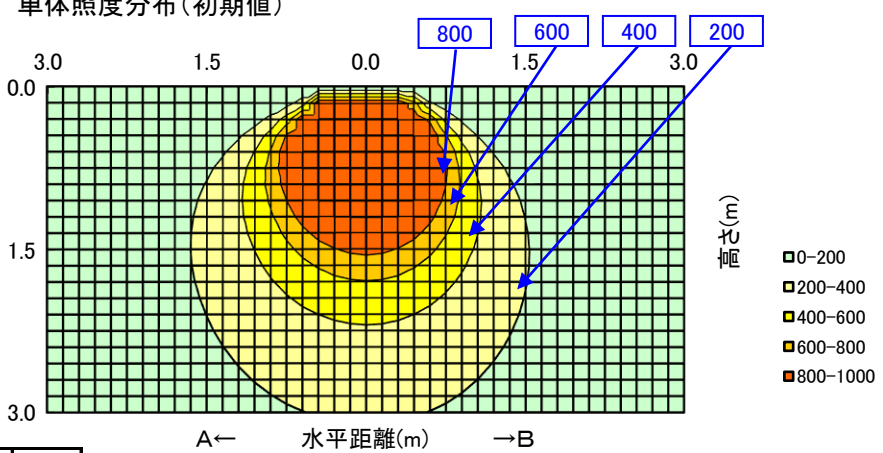
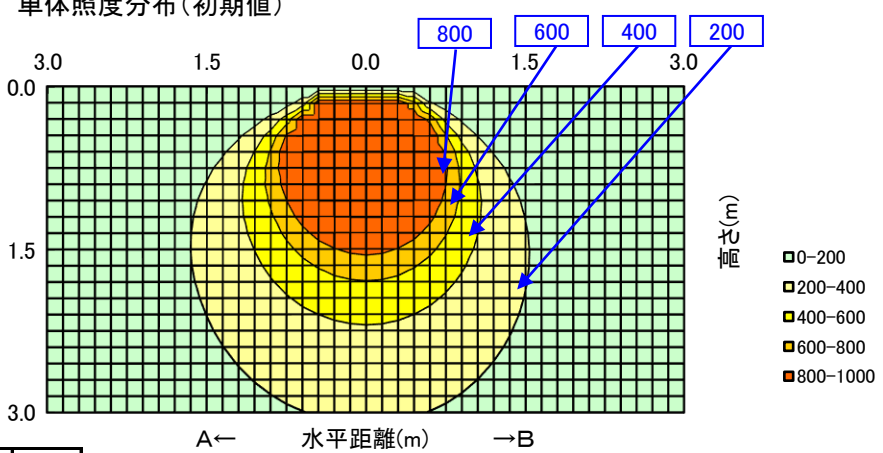
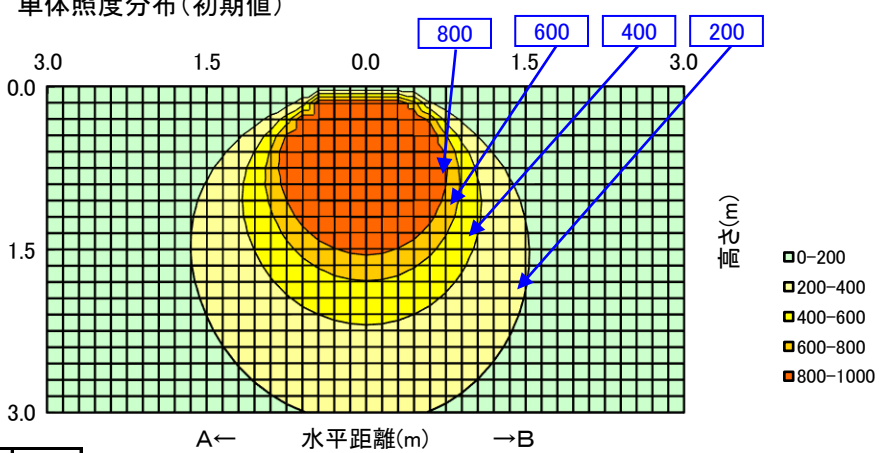
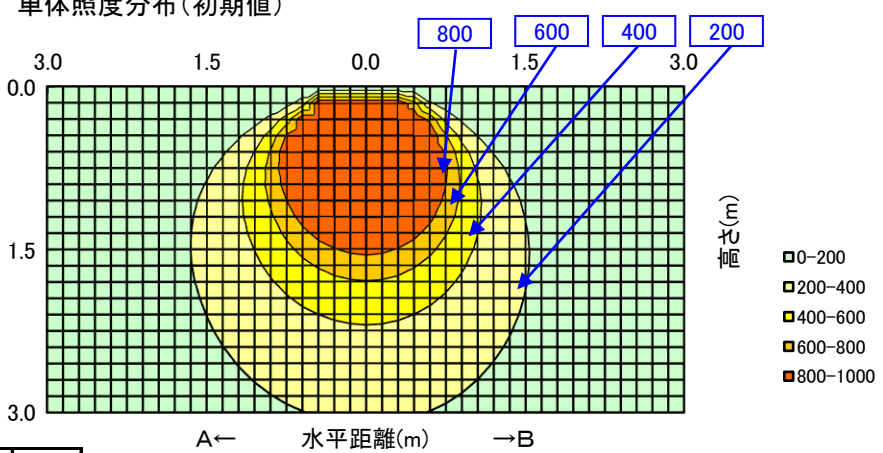


日立照明器具 照明特性																																																																																																																																								
名称: 直管形LED搭載器具	反射率	天井	80%			70%				50%			30%			0%																																																																																																																								
		壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%																																																																																																																								
		床	10%													0%																																																																																																																								
形式: TME4222-XM14E	室指数	照明率 S/H=1.0																																																																																																																																						
<備考>	0.6	0.49	0.38	0.31	0.48	0.38	0.31	0.27	0.37	0.31	0.26	0.36	0.30	0.26	0.25																																																																																																																									
	0.8	0.58	0.47	0.40	0.56	0.47	0.40	0.35	0.45	0.39	0.35	0.44	0.39	0.34	0.33																																																																																																																									
姿図 	1	0.64	0.54	0.47	0.62	0.53	0.46	0.41	0.51	0.45	0.41	0.50	0.45	0.40	0.38																																																																																																																									
	1.25	0.69	0.60	0.53	0.67	0.59	0.53	0.48	0.57	0.52	0.47	0.56	0.51	0.47	0.45																																																																																																																									
	1.5	0.73	0.65	0.58	0.71	0.64	0.58	0.53	0.62	0.57	0.52	0.60	0.56	0.52	0.50																																																																																																																									
	2	0.78	0.71	0.66	0.77	0.70	0.65	0.61	0.68	0.64	0.60	0.67	0.63	0.59	0.57																																																																																																																									
	2.5	0.81	0.75	0.70	0.80	0.74	0.70	0.66	0.72	0.68	0.65	0.71	0.67	0.64	0.62																																																																																																																									
	3	0.83	0.78	0.74	0.82	0.77	0.73	0.69	0.75	0.72	0.68	0.73	0.70	0.67	0.65																																																																																																																									
光源	4	0.86	0.82	0.78	0.85	0.81	0.78	0.75	0.79	0.76	0.73	0.77	0.75	0.72	0.70																																																																																																																									
品名 直管形LEDランプ	5	0.88	0.85	0.82	0.87	0.84	0.81	0.78	0.82	0.79	0.77	0.80	0.78	0.76	0.73																																																																																																																									
形式 LDK40SS・N/22/36NE	7	0.90	0.88	0.86	0.89	0.87	0.85	0.83	0.85	0.83	0.81	0.83	0.81	0.80	0.77																																																																																																																									
光束 7,200 lm	10	0.92	0.90	0.89	0.91	0.89	0.88	0.86	0.87	0.86	0.85	0.85	0.84	0.83	0.81																																																																																																																									
器具効率 Ft= 88.0%		単体照度分布(初期値) 																																																																																																																																						
上方光束 Fu= 0%																																																																																																																																								
下方光束 Fd= 88.0%																																																																																																																																								
最大取付間隔		配光曲線 																																																																																																																																						
A-A 1.34 H																																																																																																																																								
B-B 1.28 H																																																																																																																																								
保守率	良	0.86	器具効率 Ft= 88.0% 上方光束 Fu= 0% 下方光束 Fd= 88.0% 最大取付間隔 A-A 1.34 H B-B 1.28 H 保守率 良 0.86 中 0.81 否 0.72 光度 (cd/1000 lm) <table><thead><tr><th></th><th>A-0</th><th>B-B</th><th>C-0</th><th>A'-0</th><th>C'-0</th></tr></thead><tbody><tr><td>0</td><td>268</td><td>268</td><td>268</td><td></td><td></td></tr><tr><td>10</td><td>264</td><td>264</td><td>264</td><td></td><td></td></tr><tr><td>20</td><td>255</td><td>252</td><td>253</td><td></td><td></td></tr><tr><td>30</td><td>239</td><td>230</td><td>235</td><td></td><td></td></tr><tr><td>40</td><td>220</td><td>201</td><td>209</td><td></td><td></td></tr><tr><td>50</td><td>201</td><td>167</td><td>185</td><td></td><td></td></tr><tr><td>60</td><td>168</td><td>125</td><td>154</td><td></td><td></td></tr><tr><td>70</td><td>114</td><td>76</td><td>112</td><td></td><td></td></tr><tr><td>80</td><td>42</td><td>34</td><td>54</td><td></td><td></td></tr><tr><td>90</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>100</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>110</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>120</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>130</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>140</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>150</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>160</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>170</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>180</td><td></td><td></td><td></td><td></td><td></td></tr></tbody></table> 配光曲線 (cd/1000 lm) 															A-0	B-B	C-0	A'-0	C'-0	0	268	268	268			10	264	264	264			20	255	252	253			30	239	230	235			40	220	201	209			50	201	167	185			60	168	125	154			70	114	76	112			80	42	34	54			90						100						110						120						130						140						150						160						170						180					
		A-0															B-B	C-0	A'-0	C'-0																																																																																																																				
	0	268															268	268																																																																																																																						
10	264	264	264																																																																																																																																					
20	255	252	253																																																																																																																																					
30	239	230	235																																																																																																																																					
40	220	201	209																																																																																																																																					
50	201	167	185																																																																																																																																					
60	168	125	154																																																																																																																																					
70	114	76	112																																																																																																																																					
80	42	34	54																																																																																																																																					
90																																																																																																																																								
100																																																																																																																																								
110																																																																																																																																								
120																																																																																																																																								
130																																																																																																																																								
140																																																																																																																																								
150																																																																																																																																								
160																																																																																																																																								
170																																																																																																																																								
180																																																																																																																																								
中	0.81																																																																																																																																							
否	0.72																																																																																																																																							
光度 (cd/1000 lm)		器具効率 Ft= 88.0% 上方光束 Fu= 0% 下方光束 Fd= 88.0% 最大取付間隔 A-A 1.34 H B-B 1.28 H 保守率 良 0.86 中 0.81 否 0.72 光度 (cd/1000 lm) <table><thead><tr><th></th><th>A-0</th><th>B-B</th><th>C-0</th><th>A'-0</th><th>C'-0</th></tr></thead><tbody><tr><td>0</td><td>268</td><td>268</td><td>268</td><td></td><td></td></tr><tr><td>10</td><td>264</td><td>264</td><td>264</td><td></td><td></td></tr><tr><td>20</td><td>255</td><td>252</td><td>253</td><td></td><td></td></tr><tr><td>30</td><td>239</td><td>230</td><td>235</td><td></td><td></td></tr><tr><td>40</td><td>220</td><td>201</td><td>209</td><td></td><td></td></tr><tr><td>50</td><td>201</td><td>167</td><td>185</td><td></td><td></td></tr><tr><td>60</td><td>168</td><td>125</td><td>154</td><td></td><td></td></tr><tr><td>70</td><td>114</td><td>76</td><td>112</td><td></td><td></td></tr><tr><td>80</td><td>42</td><td>34</td><td>54</td><td></td><td></td></tr><tr><td>90</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>100</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>110</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>120</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>130</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>140</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>150</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>160</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>170</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>180</td><td></td><td></td><td></td><td></td><td></td></tr></tbody></table> 配光曲線 (cd/1000 lm) 																A-0	B-B	C-0	A'-0	C'-0	0	268	268	268			10	264	264	264			20	255	252	253			30	239	230	235			40	220	201	209			50	201	167	185			60	168	125	154			70	114	76	112			80	42	34	54			90						100						110						120						130						140						150						160						170						180					
	A-0																B-B	C-0	A'-0	C'-0																																																																																																																				
0	268																268	268																																																																																																																						
10	264																264	264																																																																																																																						
20	255	252	253																																																																																																																																					
30	239	230	235																																																																																																																																					
40	220	201	209																																																																																																																																					
50	201	167	185																																																																																																																																					
60	168	125	154																																																																																																																																					
70	114	76	112																																																																																																																																					
80	42	34	54																																																																																																																																					
90																																																																																																																																								
100																																																																																																																																								
110																																																																																																																																								
120																																																																																																																																								
130																																																																																																																																								
140																																																																																																																																								
150																																																																																																																																								
160																																																																																																																																								
170																																																																																																																																								
180																																																																																																																																								
A-0	268	268	268																																																																																																																																					
10	264	264	264																																																																																																																																					
20	255	252	253																																																																																																																																					
30	239	230	235																																																																																																																																					
40	220	201	209																																																																																																																																					
50	201	167	185																																																																																																																																					
60	168	125	154																																																																																																																																					
70	114	76	112																																																																																																																																					
80	42	34	54																																																																																																																																					
90																																																																																																																																								
100																																																																																																																																								
110																																																																																																																																								
120																																																																																																																																								
130																																																																																																																																								
140																																																																																																																																								
150																																																																																																																																								
160																																																																																																																																								
170																																																																																																																																								
180																																																																																																																																								

配光曲線

(cd/1000 lm)

| B-B | 264 | 264 | 264 | | |
C-0	255	252	253		
A'-0	239	230	235		
C'-0	220	201	209		
	201	167	185		
	168	125	154		
	114	76	112		
	42	34	54		
				</	