


日立照明器具 照明特性

名称:直管形LED搭載器具	反射率	天井	80%			70%				50%			30%			0%
		壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%
		床	10%													
形式:TME4232-JM14AE	室指数	照明率 S/H=1.0														
<備考>	0.6	0.50	0.40	0.34	0.49	0.40	0.34	0.29	0.39	0.33	0.29	0.38	0.33	0.29	0.28	
	0.8	0.58	0.49	0.43	0.57	0.48	0.42	0.38	0.47	0.42	0.38	0.46	0.41	0.38	0.36	
姿図 	1	0.64	0.55	0.49	0.62	0.55	0.49	0.44	0.53	0.48	0.44	0.52	0.48	0.44	0.42	
	1.25	0.69	0.61	0.55	0.67	0.60	0.55	0.51	0.59	0.54	0.50	0.57	0.53	0.50	0.48	
	1.5	0.72	0.65	0.60	0.71	0.65	0.60	0.56	0.63	0.59	0.55	0.62	0.58	0.55	0.53	
	2	0.77	0.71	0.67	0.76	0.70	0.66	0.63	0.69	0.65	0.62	0.67	0.64	0.61	0.59	
	2.5	0.80	0.75	0.71	0.78	0.74	0.70	0.67	0.72	0.69	0.66	0.70	0.68	0.65	0.63	
	3	0.81	0.77	0.73	0.80	0.76	0.73	0.70	0.74	0.71	0.69	0.73	0.70	0.68	0.66	
	4	0.84	0.80	0.77	0.82	0.79	0.77	0.74	0.78	0.75	0.73	0.76	0.74	0.72	0.70	
光源	5	0.85	0.82	0.80	0.84	0.81	0.79	0.77	0.80	0.78	0.76	0.78	0.76	0.75	0.72	
品名直管形LEDランプ	7	0.87	0.85	0.83	0.86	0.84	0.83	0.81	0.82	0.81	0.80	0.81	0.79	0.78	0.76	
形式LDK40SS・D/15/23NE	10	0.89	0.87	0.86	0.87	0.86	0.85	0.84	0.84	0.84	0.83	0.83	0.82	0.81	0.79	
光束4,660 lm																

器具効率 Ft=83.8%					
上方光束 Fu=0%					
下方光束 Fd=83.8%					
最大取付間隔					
A-A		1.38 H			
B-B		1.30 H			
保守率	良	0.86			
	中	0.81			
	否	0.72			
光度 (cd/1000 lm)					
	A-0	B-B	C-0	A'-0	C'-0
0	297	297	297		
10	295	294	294		
20	289	279	286		
30	271	256	266		
40	242	226	241		
50	178	186	204		
60	86	137	123		
70	39	85	55		
80	17	36	18		
90					
100					
110					
120					
130					
140					
150					
160					
170					
180					

単体照度分布(初期値)

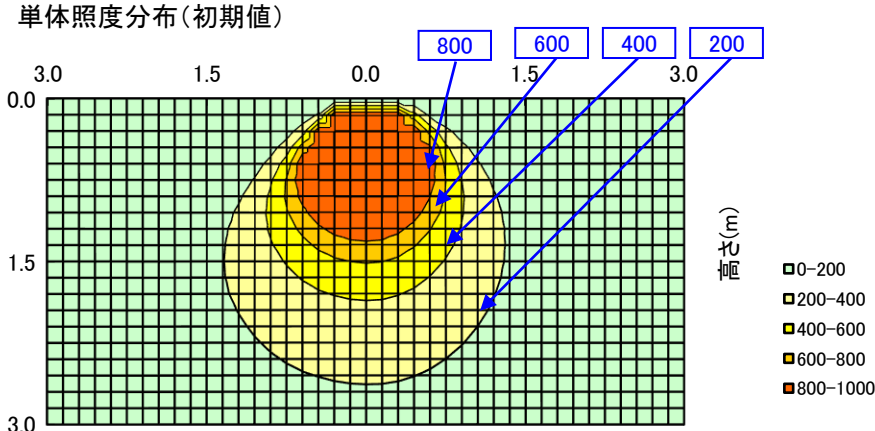

800 600 400 200

3.0 1.5 0.0 1.5 3.0


0.0 1.5 3.0

水平距離(m)

単位: m

0-200
200-400
400-600
600-800
800-1000

配光曲線
(cd/1000 lm)

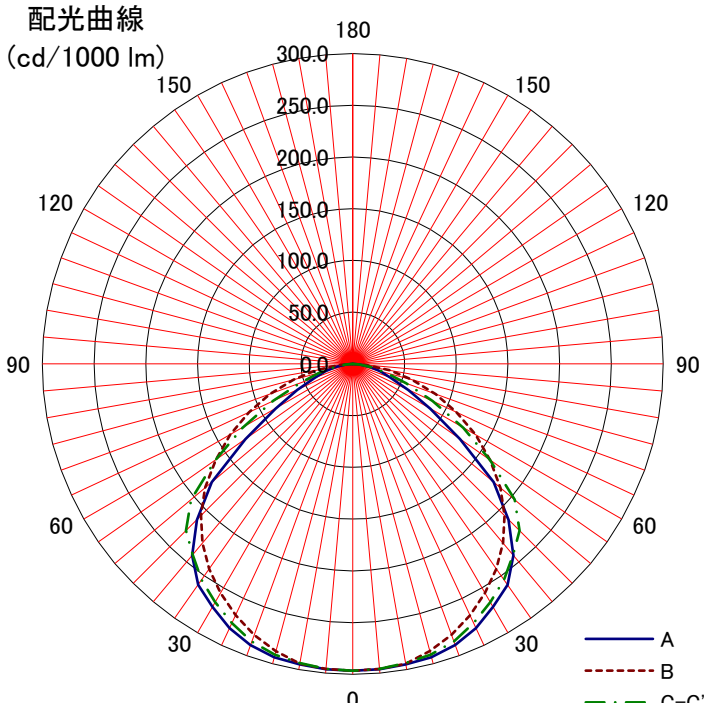

180 150 120 90 60 30 0

300.0 250.0 200.0 150.0 100.0 50.0 0.0

A
B
C-C'