


日立照明器具 照明特性

形式: TME4241-J14A		反 射 率	天井	80%			70%				50%			30%			0%		
姿図 			壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%		
			床	10%															0%
			室指数	照明率 S/H=1.0															
品名	LED直管ランプ	5	0.6	0.55	0.43	0.35	0.54	0.42	0.34	0.29	0.41	0.34	0.29	0.40	0.33	0.29	0.27		
形式	LDK40SS-N/18/24	7	0.8	0.64	0.52	0.44	0.63	0.52	0.44	0.38	0.50	0.43	0.38	0.49	0.42	0.38	0.35		
器具光束	4,250 lm	10	1	0.71	0.59	0.51	0.69	0.58	0.51	0.45	0.57	0.50	0.44	0.55	0.49	0.44	0.42		
			1.25	0.77	0.66	0.58	0.75	0.65	0.58	0.52	0.63	0.57	0.52	0.62	0.56	0.51	0.49		
			1.5	0.81	0.72	0.64	0.80	0.71	0.64	0.58	0.69	0.63	0.57	0.67	0.61	0.57	0.54		
			2	0.87	0.79	0.73	0.86	0.78	0.72	0.67	0.76	0.71	0.66	0.74	0.69	0.65	0.63		
			2.5	0.91	0.84	0.78	0.89	0.83	0.77	0.72	0.80	0.76	0.72	0.78	0.74	0.71	0.68		
			3	0.93	0.87	0.82	0.92	0.86	0.81	0.77	0.84	0.79	0.76	0.82	0.78	0.75	0.72		
			4	0.97	0.92	0.87	0.95	0.91	0.86	0.83	0.88	0.85	0.82	0.86	0.83	0.80	0.77		
			5	0.99	0.95	0.91	0.97	0.94	0.90	0.87	0.91	0.88	0.86	0.89	0.87	0.84	0.81		
			7	1.02	0.99	0.96	1.00	0.97	0.95	0.92	0.95	0.93	0.91	0.93	0.91	0.89	0.86		
			10	1.04	1.02	1.00	1.02	1.00	0.99	0.97	0.98	0.96	0.95	0.96	0.95	0.93	0.90		

器具効率 Ft= 100.0%		
上方光束 Fu= 0.0%		
下方光束 Fd= 100.0%		
配光分類		
BZ-		
最大取付間隔		
A-A	1.34	H
B-B	1.28	H
保守率	良	0.86
	中	0.81
	否	0.72

単体照度分布(初期)

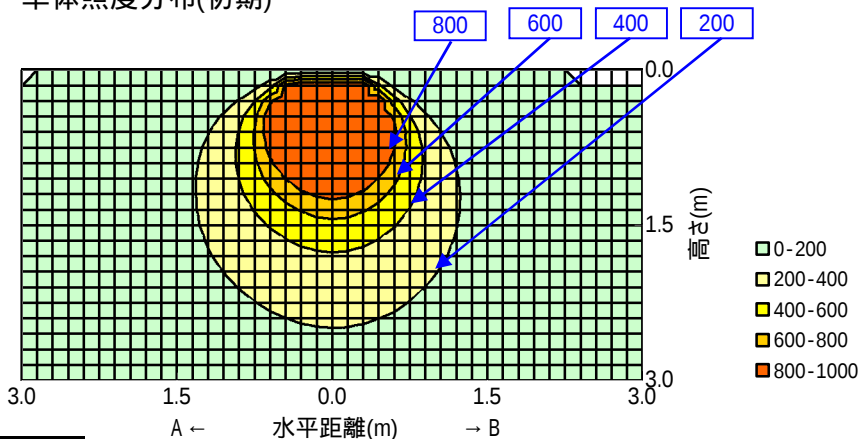

光度 (cd/1000 lm)					
	A-0	B-B	C-0	A'-0	C'-0
0	292	292	292		
10	286	287	288		
20	274	273	273		
30	261	251	254		
40	241	220	228		
50	216	184	201		
60	192	138	167		
70	156	84	132		
80	83	31	78		
90					
100					
110					
120					
130					
140					
150					
160					
170					
180					

配光曲線

