

日立照明器具 照明特性


名称: 直管形LED搭載器具	反射率	天井	80%			70%				50%			30%			0%
		壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%
形式: TME4241-JM14AE	床	10%														0%
<備考> 姿図  光源 品名 直管形LEDランプ 形式 LDK40SS-D/22/34NE 光束 6,980 lm	室指数	照明率 S/H=1.0														
	0.6	0.49	0.38	0.31	0.48	0.37	0.31	0.26	0.36	0.30	0.26	0.35	0.30	0.25	0.24	
	0.8	0.57	0.47	0.39	0.56	0.46	0.39	0.34	0.45	0.38	0.34	0.43	0.38	0.33	0.31	
	1	0.63	0.53	0.46	0.62	0.52	0.45	0.40	0.51	0.44	0.40	0.49	0.44	0.39	0.37	
	1.25	0.68	0.59	0.52	0.67	0.58	0.52	0.46	0.56	0.51	0.46	0.55	0.50	0.46	0.43	
	1.5	0.72	0.64	0.57	0.71	0.63	0.57	0.52	0.61	0.56	0.51	0.59	0.55	0.51	0.49	
	2	0.78	0.70	0.65	0.76	0.69	0.64	0.59	0.68	0.63	0.59	0.66	0.62	0.58	0.56	
	2.5	0.81	0.75	0.69	0.79	0.74	0.69	0.65	0.72	0.67	0.64	0.70	0.66	0.63	0.61	
	3	0.83	0.78	0.73	0.82	0.77	0.72	0.68	0.75	0.71	0.67	0.73	0.69	0.66	0.64	
	4	0.86	0.82	0.78	0.85	0.81	0.77	0.74	0.79	0.75	0.73	0.77	0.74	0.72	0.69	
	5	0.88	0.84	0.81	0.87	0.83	0.80	0.77	0.81	0.79	0.76	0.79	0.77	0.75	0.73	
7	0.90	0.88	0.85	0.89	0.87	0.84	0.82	0.85	0.83	0.81	0.83	0.81	0.79	0.77		
10	0.92	0.90	0.89	0.91	0.89	0.88	0.86	0.87	0.86	0.85	0.85	0.84	0.83	0.80		

器具効率 Ft= 88.4%
 上方光束 Fu= 0%
 下方光束 Fd= 88.4%

最大取付間隔		
A-A	1.34	H
B-B	1.28	H
保守率	良	0.86
	中	0.81
	否	0.72

光度 (cd/1000 lm)					
	A-0	B-B	C-0	A'-0	C'-0
0	260	260	260		
10	255	256	257		
20	244	244	244		
30	232	224	226		
40	215	196	203		
50	193	164	179		
60	171	123	149		
70	139	75	117		
80	74	28	69		
90					
100					
110					
120					
130					
140					
150					
160					
170					
180					

単体照度分布(初期値)

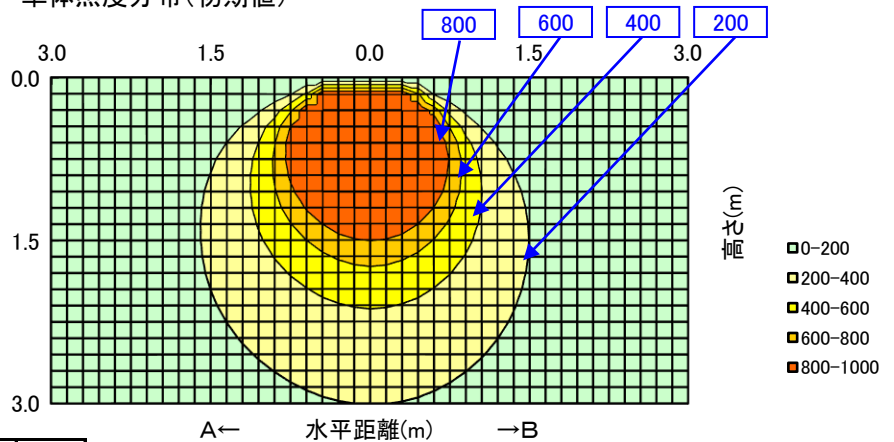

配光曲線 (cd/1000 lm)

