


日立照明器具 照明特性

形式: TPE32401L-JZU14A		反 射 率	天井	80%			70%				50%			30%			0%
<高出力タイプ> <電球色相当> <初期照度補正、連続調光共用形>			壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%
			床	10%													
		室指数	照明率 S/H=1.0														
		0.6	0.59	0.47	0.39	0.57	0.46	0.39	0.34	0.45	0.38	0.33	0.44	0.38	0.33	0.31	
		0.8	0.68	0.57	0.49	0.67	0.56	0.49	0.43	0.55	0.48	0.43	0.53	0.48	0.43	0.41	
		1	0.75	0.64	0.56	0.73	0.63	0.56	0.51	0.62	0.55	0.50	0.60	0.54	0.50	0.48	
		1.25	0.80	0.71	0.64	0.79	0.70	0.63	0.58	0.68	0.62	0.58	0.67	0.61	0.57	0.55	
		1.5	0.85	0.76	0.70	0.83	0.75	0.69	0.64	0.73	0.68	0.63	0.72	0.67	0.63	0.61	
		2	0.91	0.83	0.78	0.89	0.82	0.77	0.72	0.80	0.76	0.72	0.78	0.74	0.71	0.68	
		2.5	0.94	0.88	0.83	0.92	0.87	0.82	0.78	0.85	0.80	0.77	0.83	0.79	0.76	0.73	
		3	0.96	0.91	0.86	0.95	0.90	0.85	0.82	0.87	0.84	0.80	0.85	0.82	0.79	0.77	
光源		4	0.99	0.95	0.91	0.98	0.94	0.90	0.87	0.91	0.88	0.86	0.89	0.87	0.84	0.82	
品名	LED	5	1.01	0.98	0.94	1.00	0.96	0.93	0.91	0.94	0.92	0.89	0.92	0.90	0.88	0.85	
形式		7	1.03	1.01	0.99	1.02	1.00	0.98	0.96	0.98	0.96	0.94	0.95	0.94	0.92	0.90	
光束	5,230 lm	10	1.05	1.04	1.02	1.04	1.02	1.01	0.99	1.00	0.99	0.98	0.98	0.97	0.96	0.93	

器具効率 Ft= 100.0%					
上方光束 Fu= 0.0%					
下方光束 Fd= 100.0%					
配光分類					
BZ-					
最大取付間隔					
A-A 1.28 H					
B-B 1.26 H					
保守率	良	0.81			
	中	0.77			
	否	0.72			
光度 (cd/1000 lm)					
	A-0	B-B	C-0	A'-0	C'-0
0	354	354	354		
10	348	348	347		
20	328	327	328		
30	303	297	297		
40	260	257	258		
50	208	205	208		
60	162	158	153		
70	96	95	98		
80	34	34	34		
90					
100					
110					
120					
130					
140					
150					
160					
170					
180					

単体照度分布(初期)

800 600 400 200

高さ(m)

0.0 1.5 3.0

3.0 1.5 0.0 1.5 3.0

A ← 水平距離(m) → B

0-200
200-400
400-600
600-800
800-1000


配光曲線

180 150 120 90 60 30 0

400.0 350.0 300.0 250.0 200.0 150.0 100.0 50.0 0.0

A
B
C-C'

単体照度分布(初期)

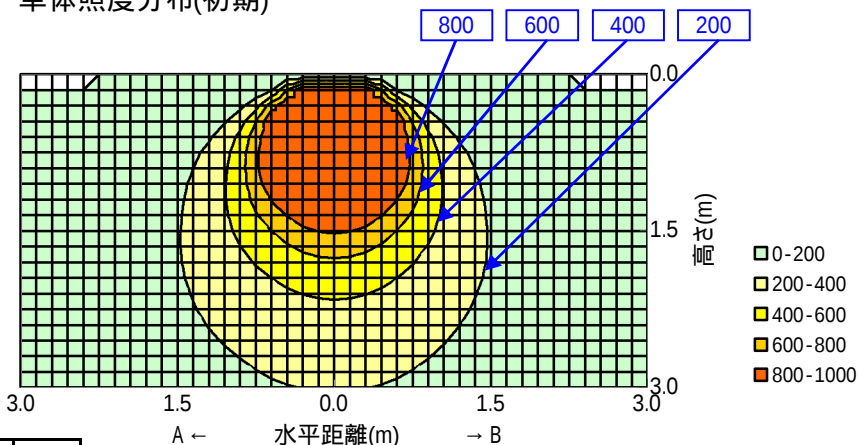

配光曲線

