
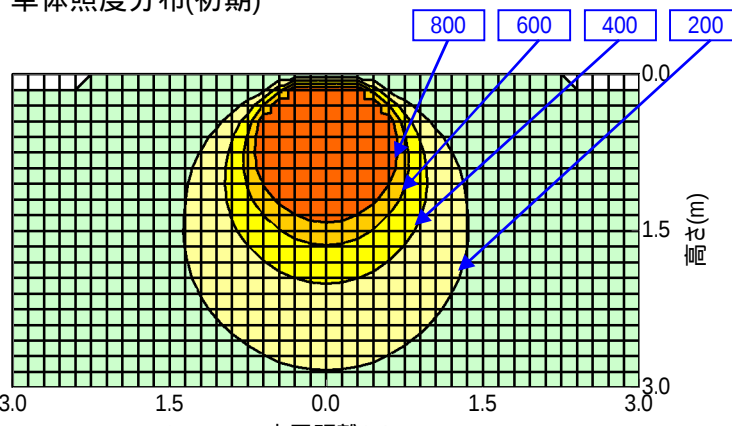
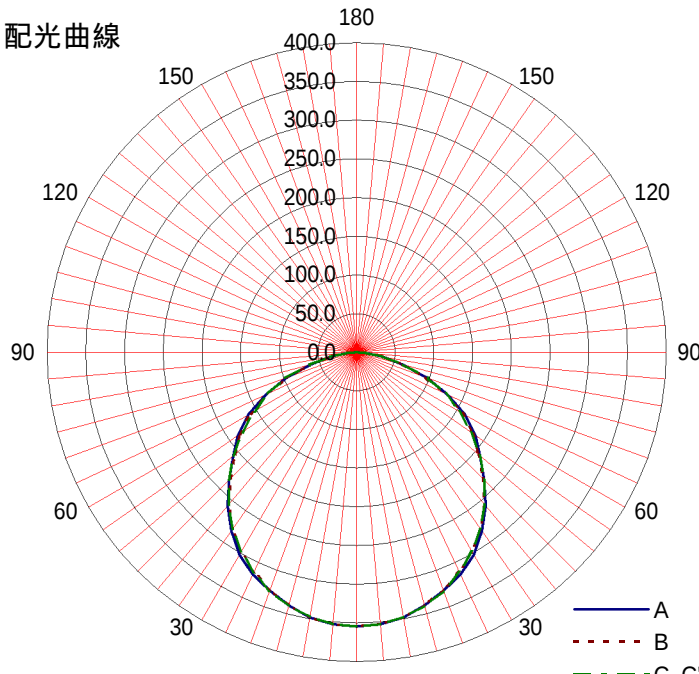


日立照明器具 照明特性

形式: TPE32401N-JZ14 <定格出力タイプ> <昼白色相当> <照度補正、連続調光共用形>		天井	80%			70%				50%			30%			0%	
		壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%	
		床	10%														0%
		室指数	照明率 S/H=1.0														
姿図 		0.6	0.59	0.47	0.39	0.57	0.46	0.39	0.34	0.45	0.38	0.33	0.44	0.38	0.33	0.31	
		0.8	0.68	0.57	0.49	0.67	0.56	0.49	0.43	0.55	0.48	0.43	0.53	0.48	0.43	0.41	
		1	0.75	0.64	0.56	0.73	0.63	0.56	0.51	0.62	0.55	0.50	0.60	0.54	0.50	0.48	
		1.25	0.80	0.71	0.64	0.79	0.70	0.63	0.58	0.68	0.62	0.58	0.67	0.61	0.57	0.55	
		1.5	0.85	0.76	0.70	0.83	0.75	0.69	0.64	0.73	0.68	0.63	0.72	0.67	0.63	0.61	
		2	0.91	0.83	0.78	0.89	0.82	0.77	0.72	0.80	0.76	0.72	0.78	0.74	0.71	0.68	
		2.5	0.94	0.88	0.83	0.92	0.87	0.82	0.78	0.85	0.80	0.77	0.83	0.79	0.76	0.73	
		3	0.96	0.91	0.86	0.95	0.90	0.85	0.82	0.87	0.84	0.80	0.85	0.82	0.79	0.77	
光源		4	0.99	0.95	0.91	0.98	0.94	0.90	0.87	0.91	0.88	0.86	0.89	0.87	0.84	0.82	
品名	LED	5	1.01	0.98	0.94	1.00	0.96	0.93	0.91	0.94	0.92	0.89	0.92	0.90	0.88	0.85	
形式		7	1.03	1.01	0.99	1.02	1.00	0.98	0.96	0.98	0.96	0.94	0.95	0.94	0.92	0.90	
光束	4,520 lm	10	1.05	1.04	1.02	1.04	1.02	1.01	0.99	1.00	0.99	0.98	0.98	0.97	0.96	0.93	

器具効率 Ft= 100.0%			単体照度分布(初期) 							
上方光束 Fu= 0.0%										
下方光束 Fd= 100.0%										
配光分類										
BZ-										
最大取付間隔										
A-A 1.28 H										
B-B 1.26 H										
保守率	良	0.77								
	中	0.72								
	否	0.68								
光度 (cd/1000 lm)			配光曲線 							
	A-0	B-B						C-0	A'-0	C'-0
0	354	354						354		
10	348	348						347		
20	328	327						328		
30	303	297						297		
40	260	257						258		
50	208	205						208		
60	162	158						153		
70	96	95						98		
80	34	34						34		
90										
100										
110										
120										
130										
140										
150										
160										
170										
180										