
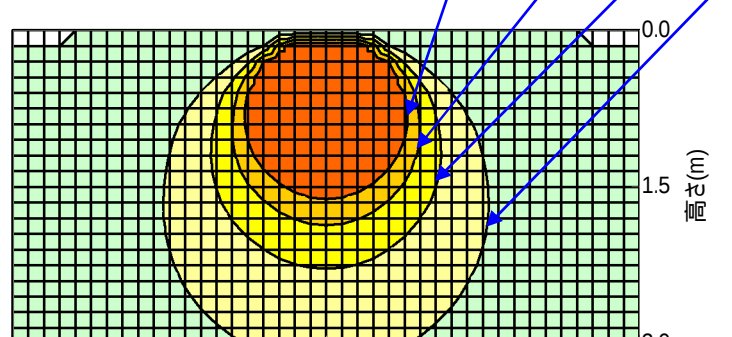
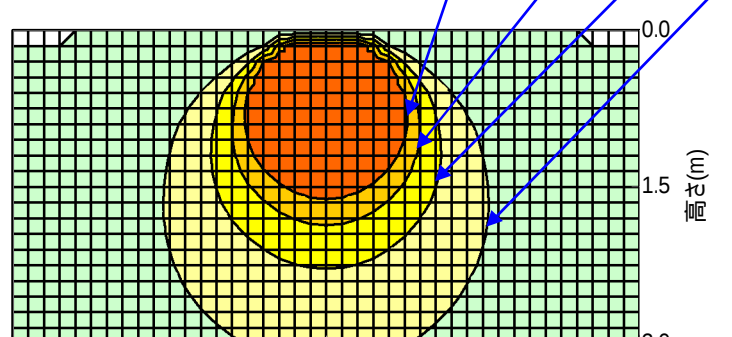
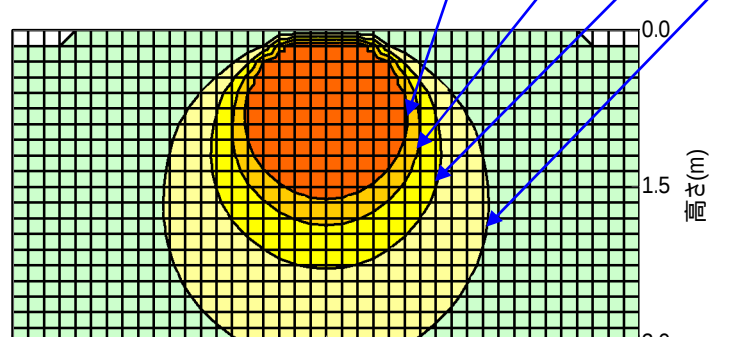
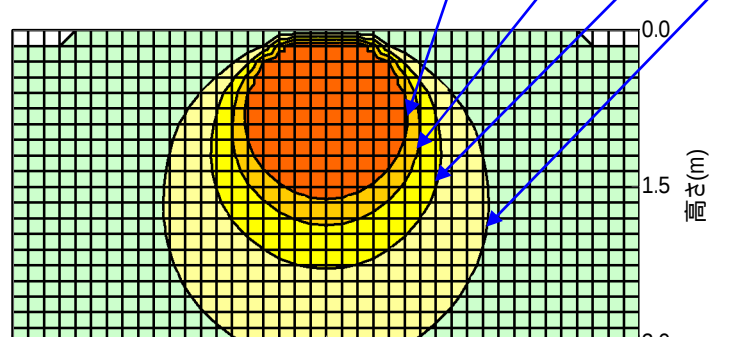
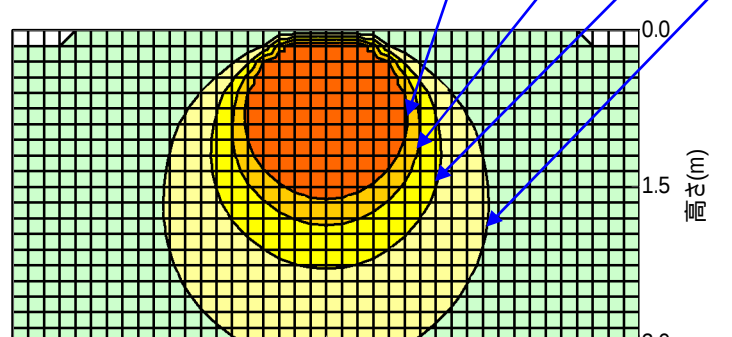
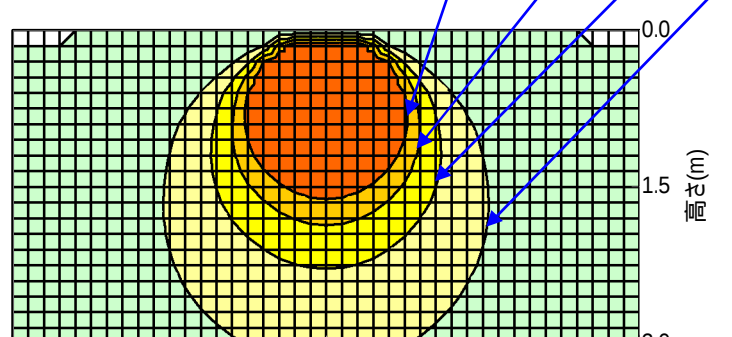
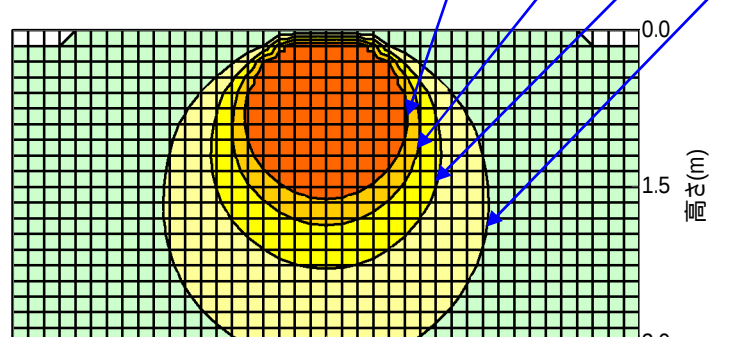
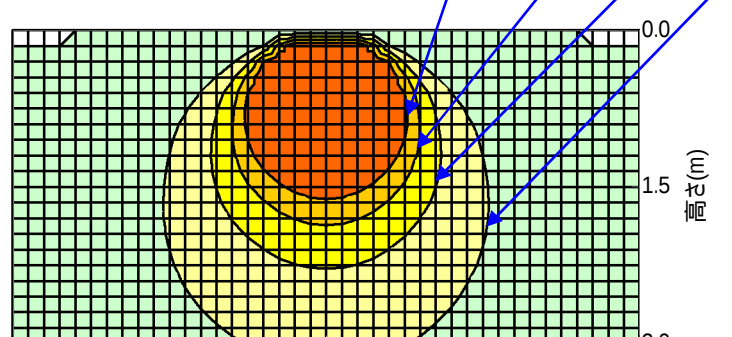
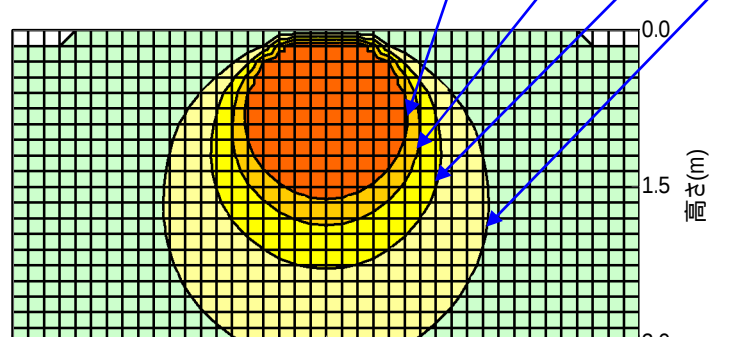
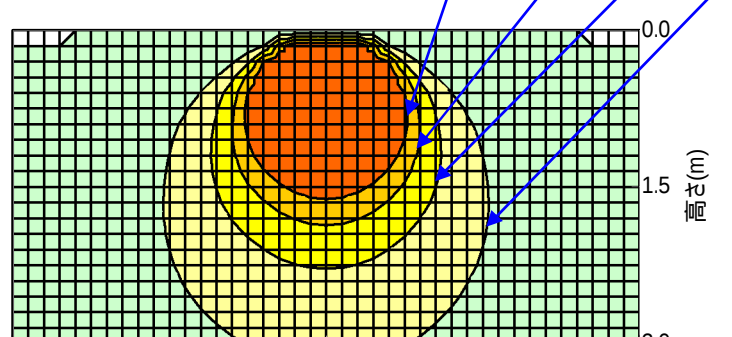
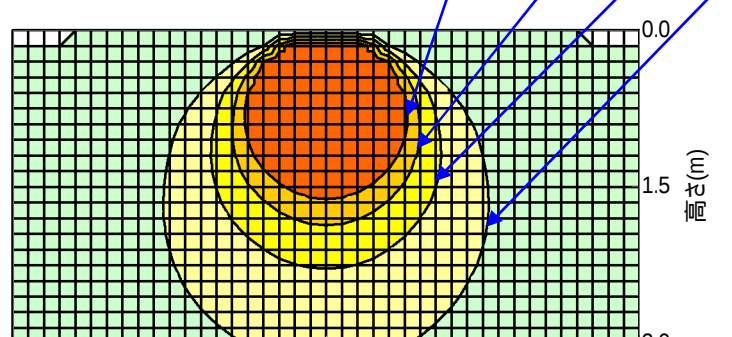
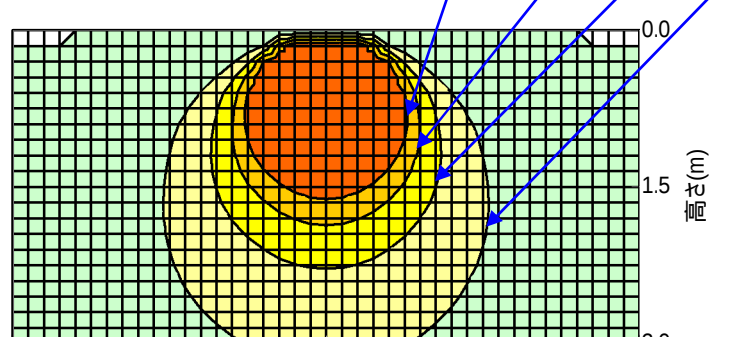
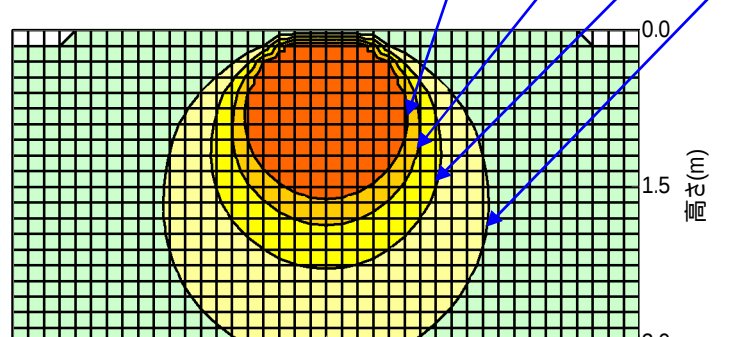
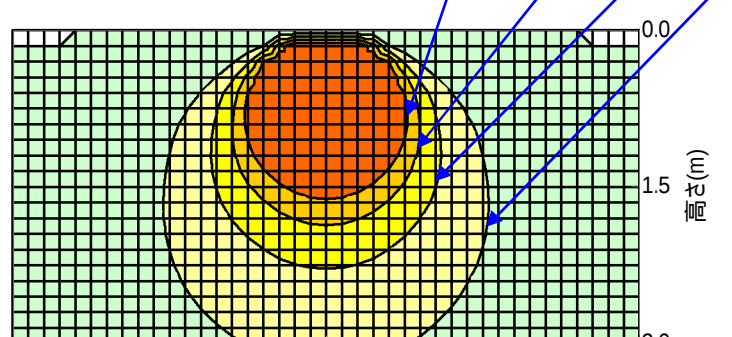
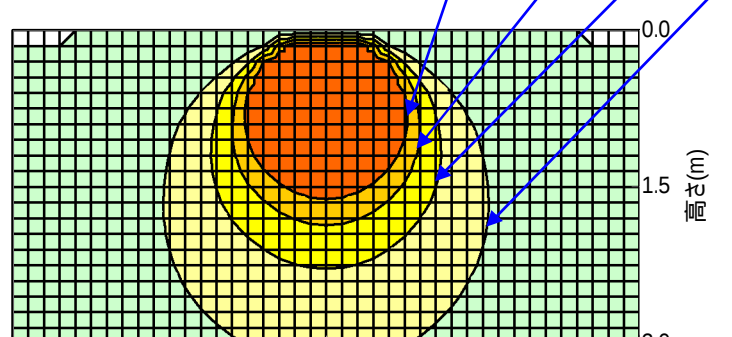
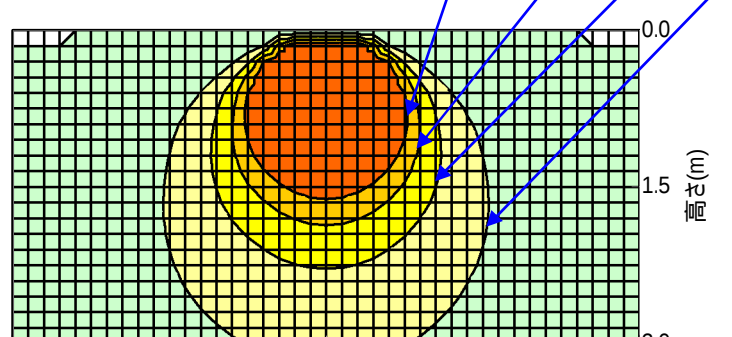
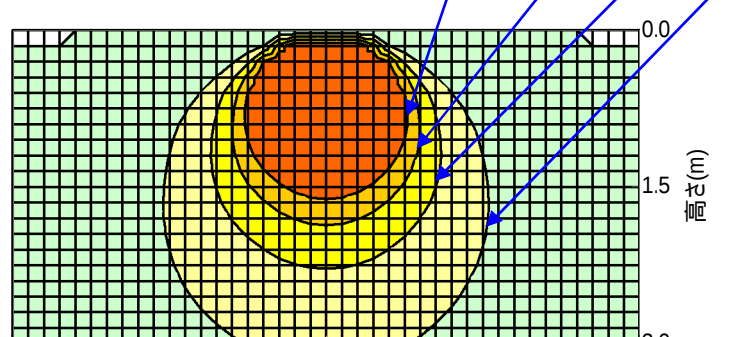
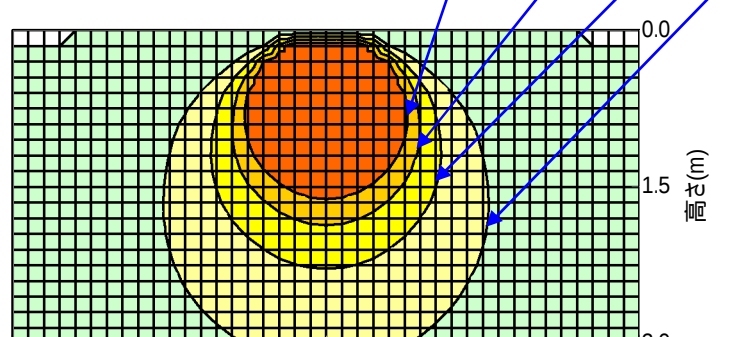
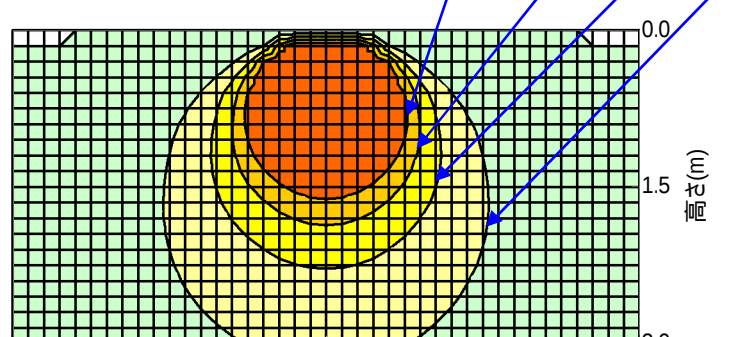
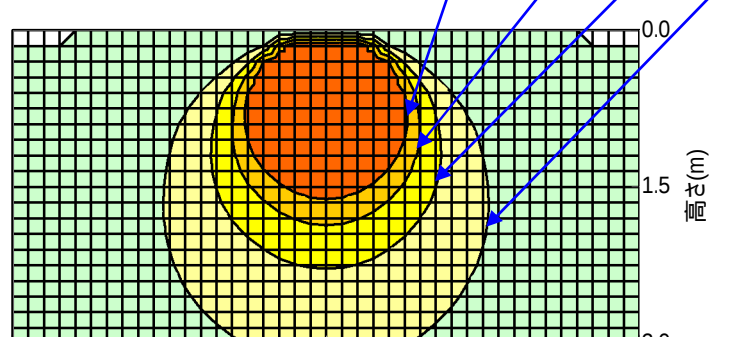
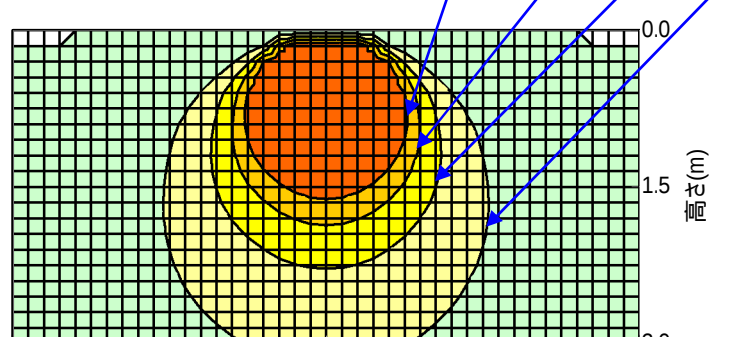
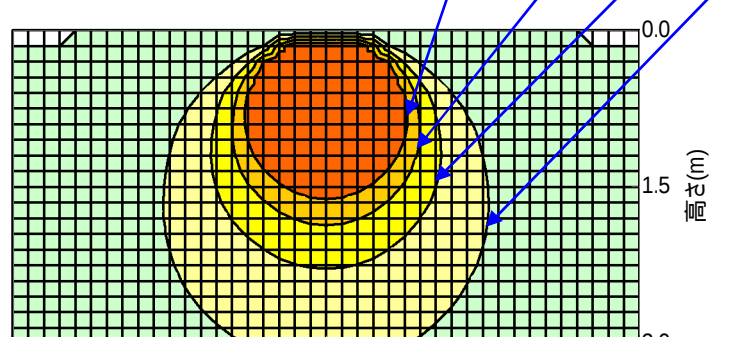
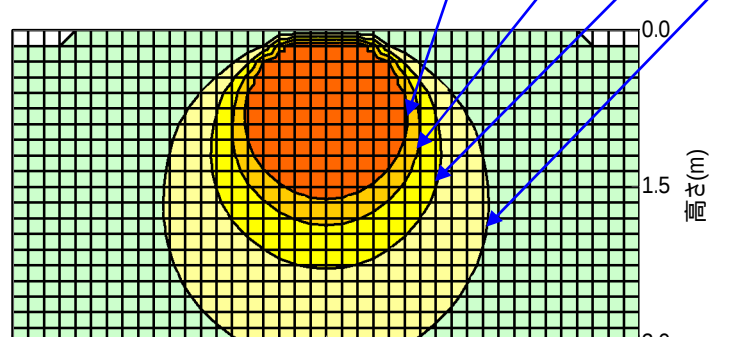
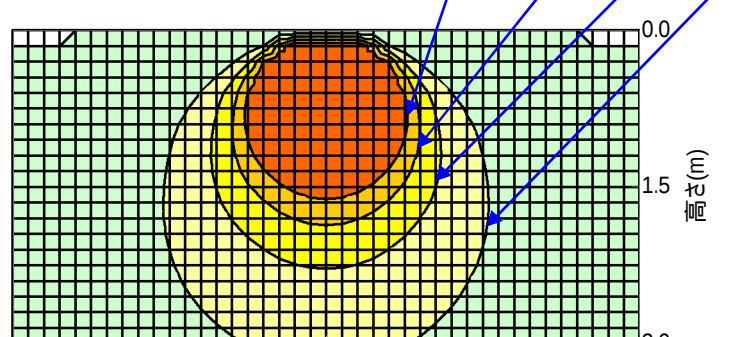
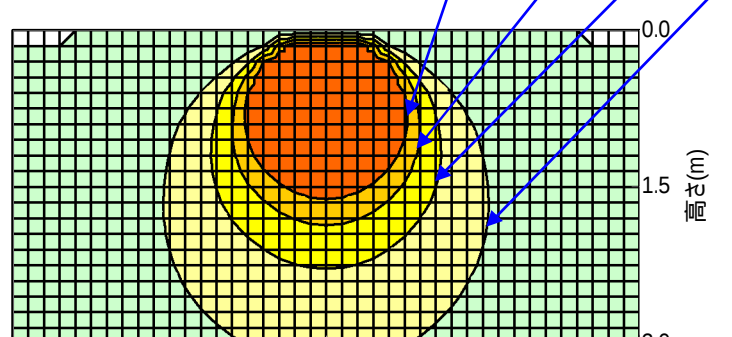
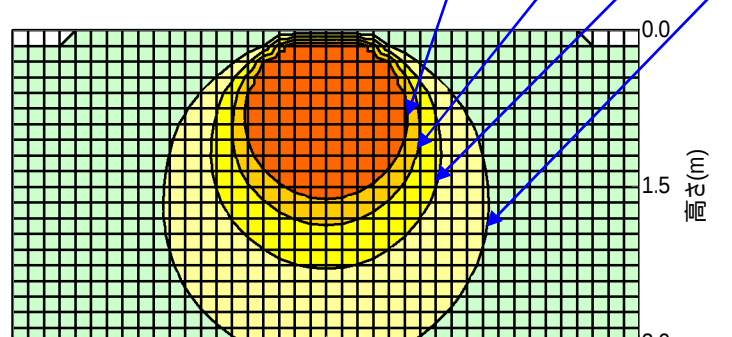
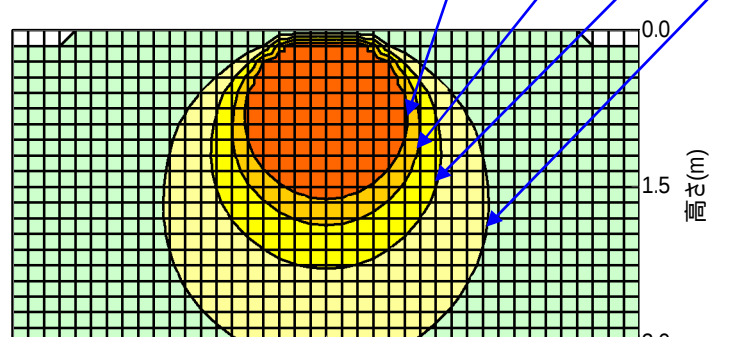
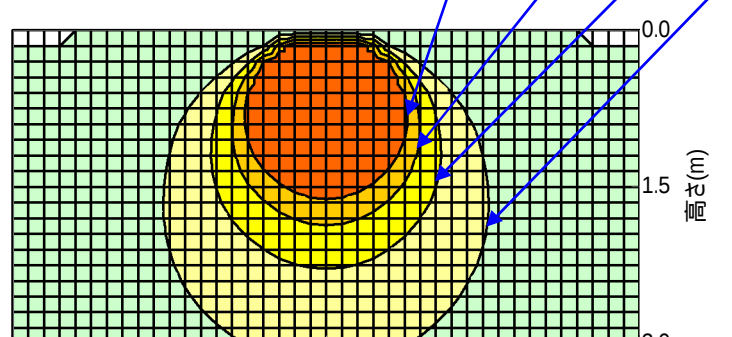
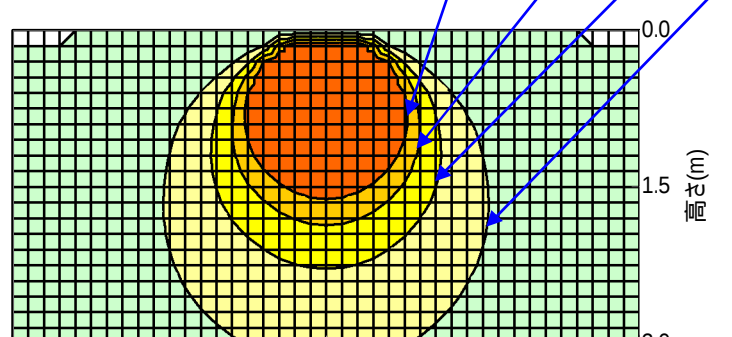
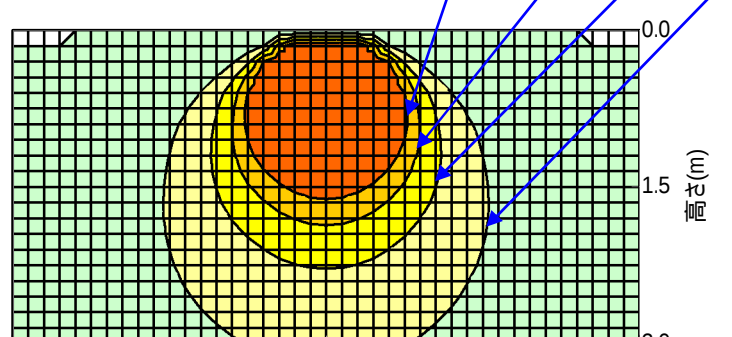
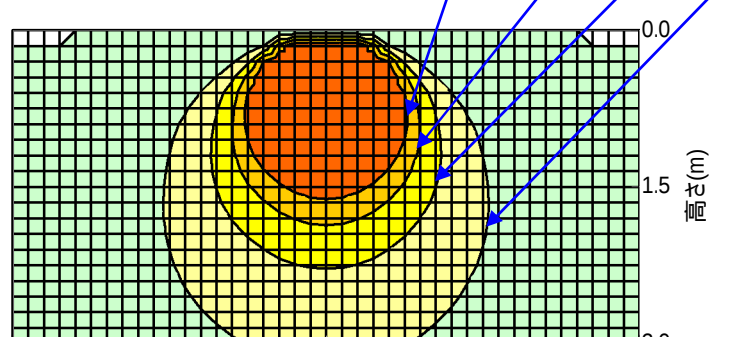
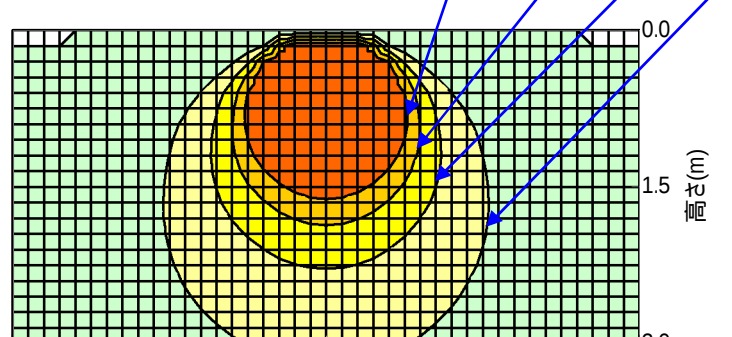
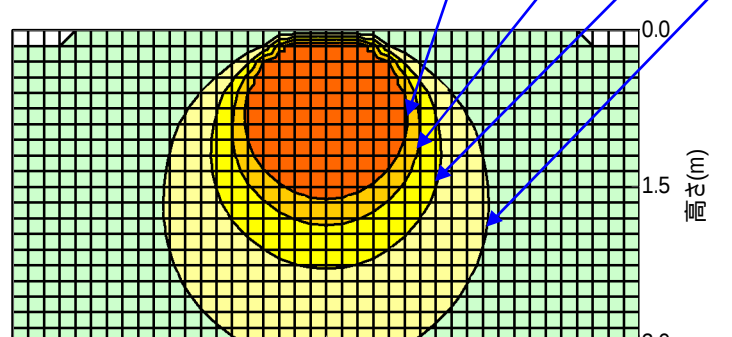
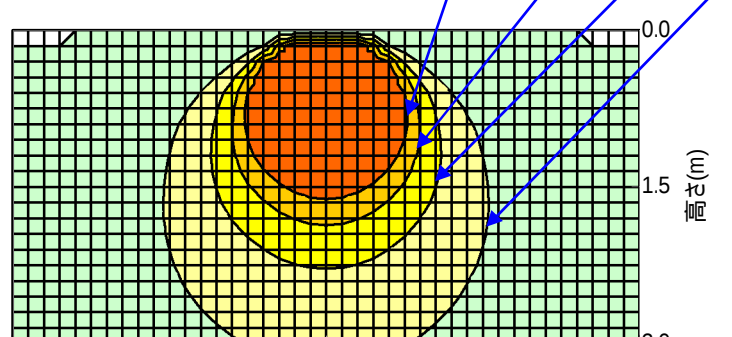
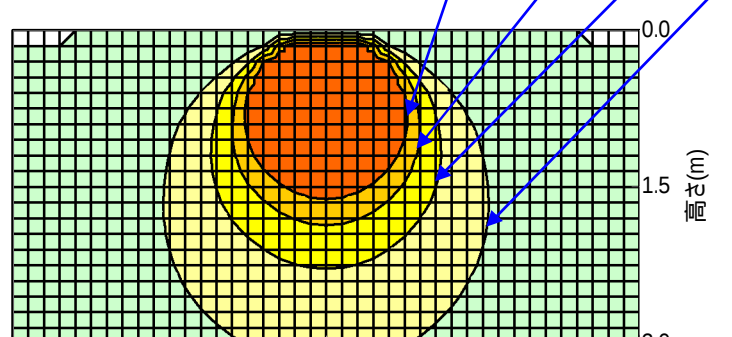
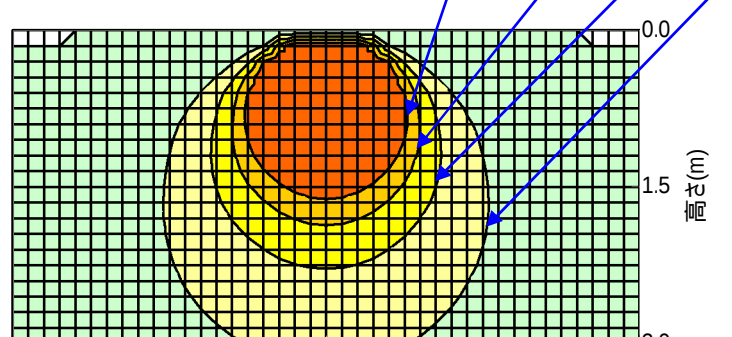
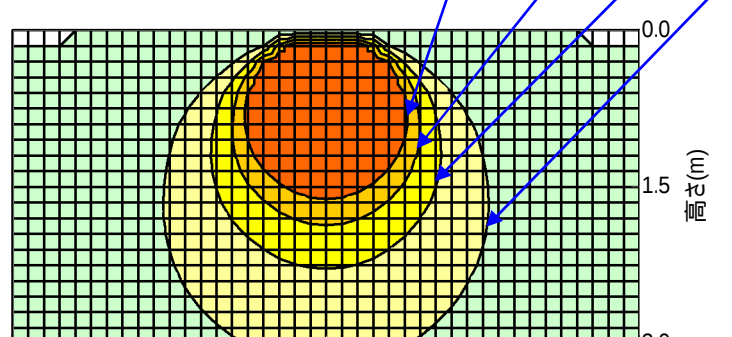
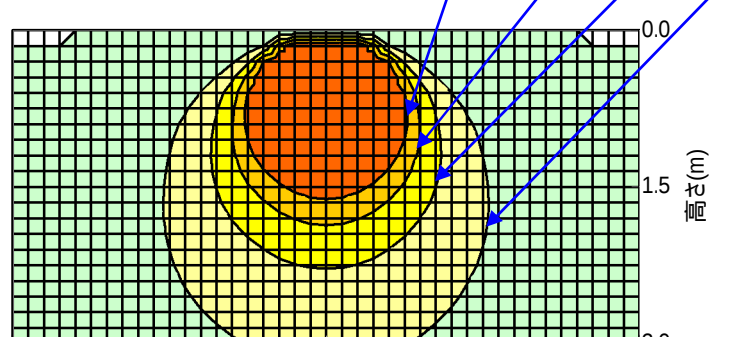
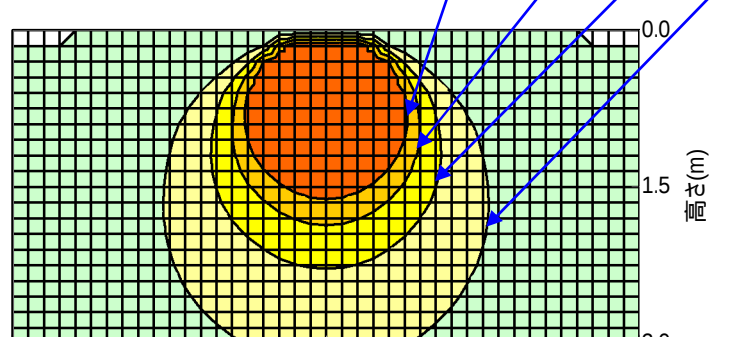
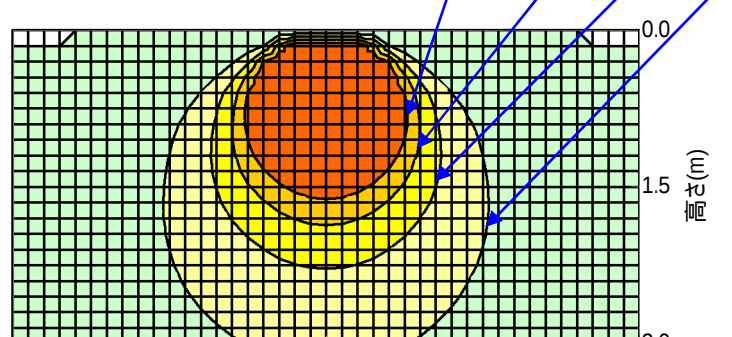
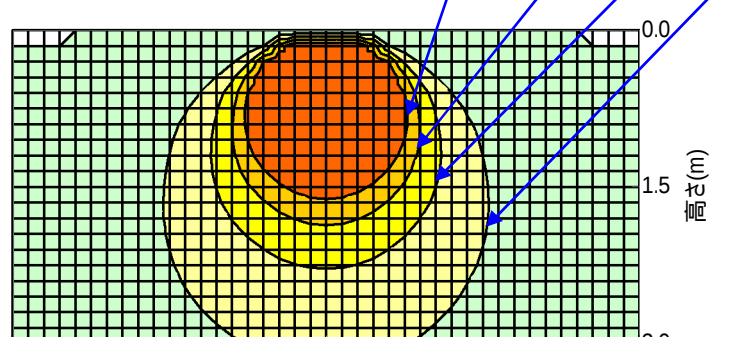
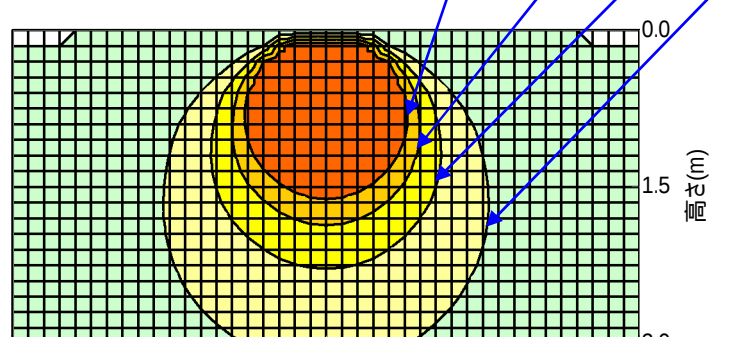
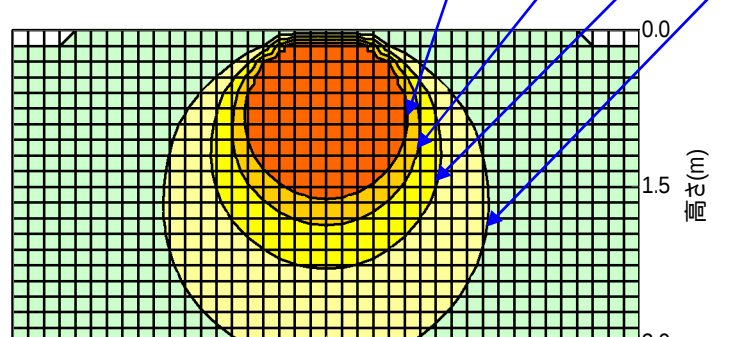
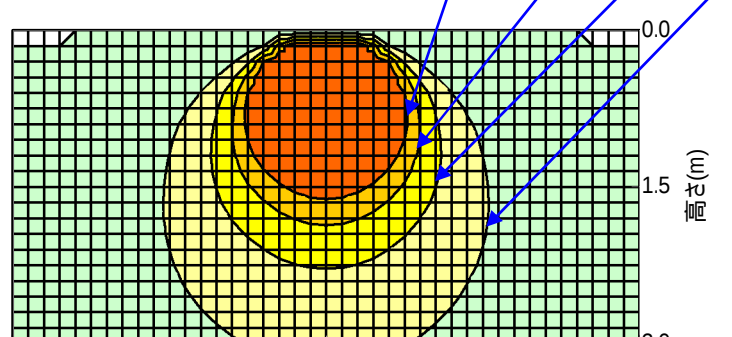
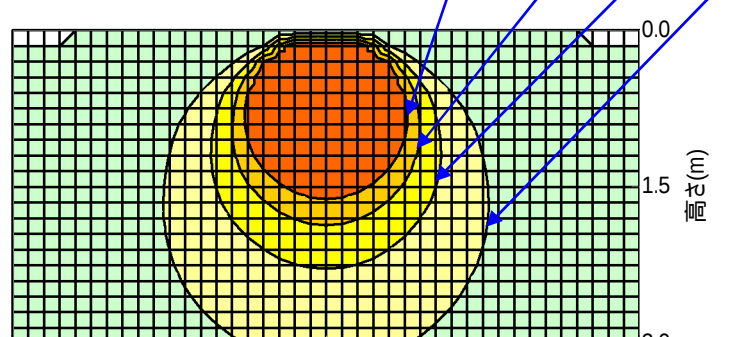
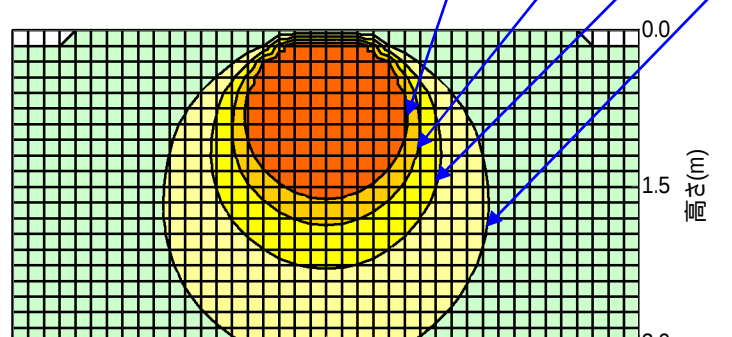
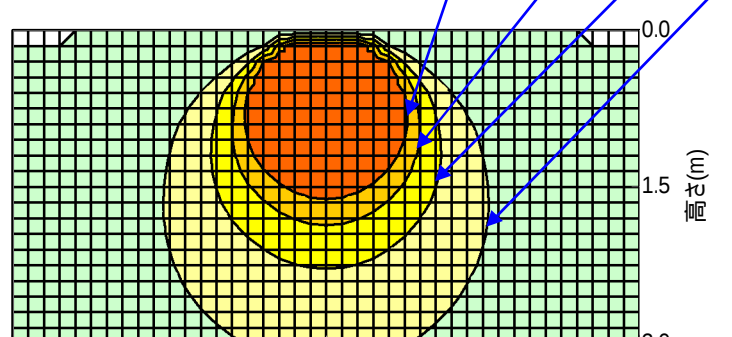
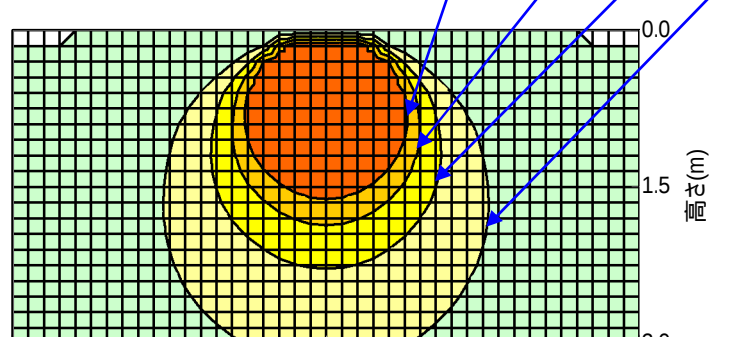
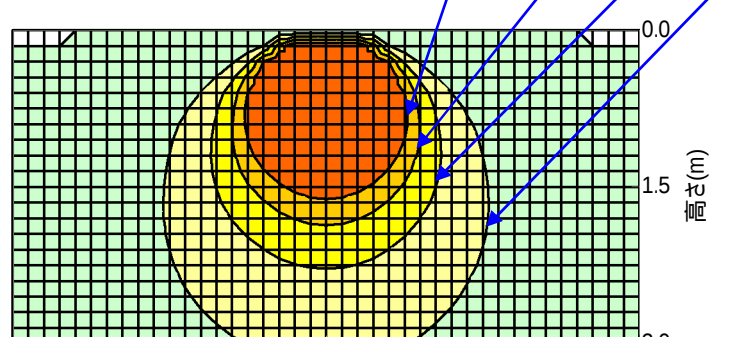
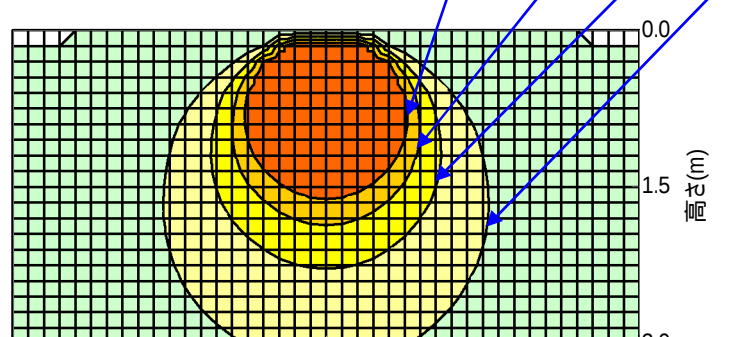
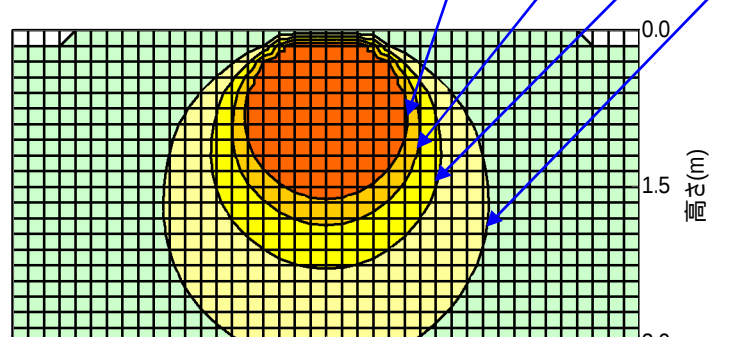
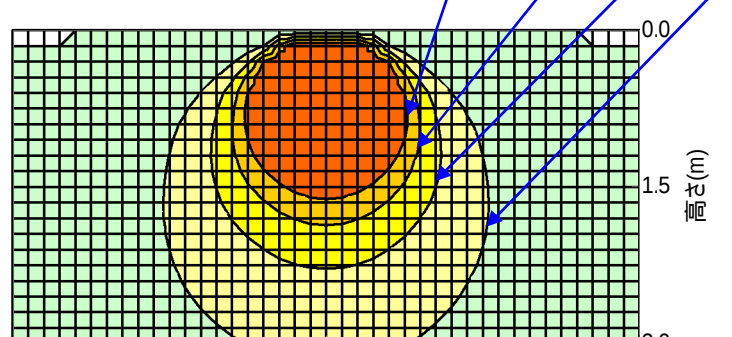
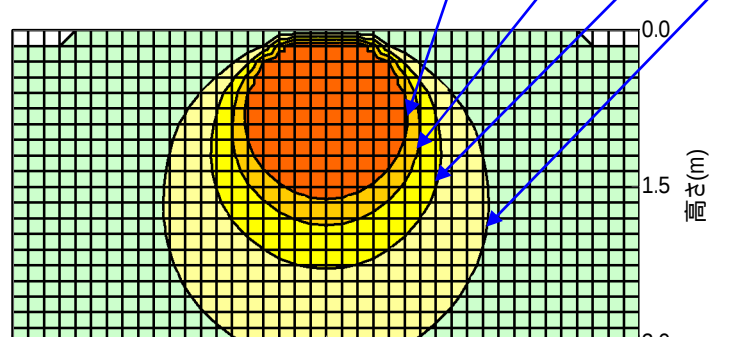
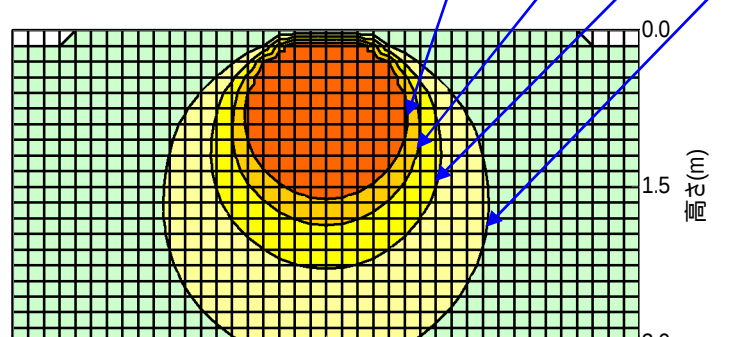
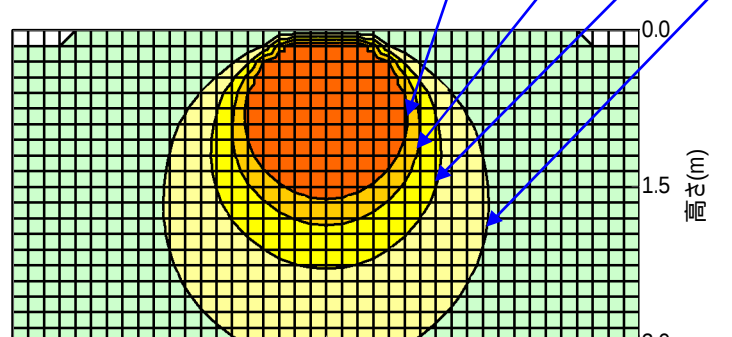
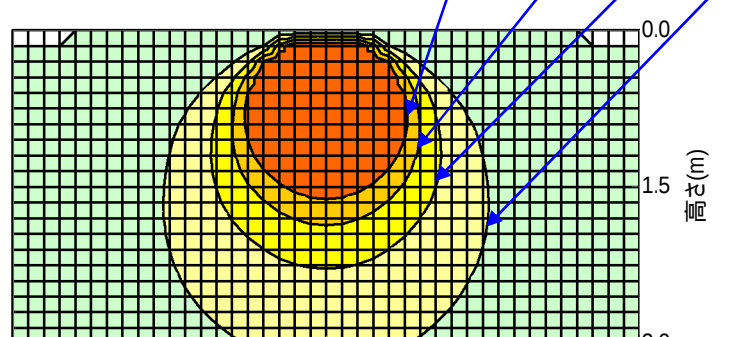
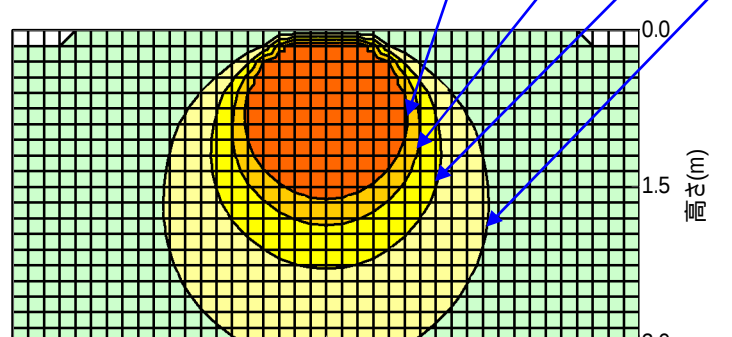
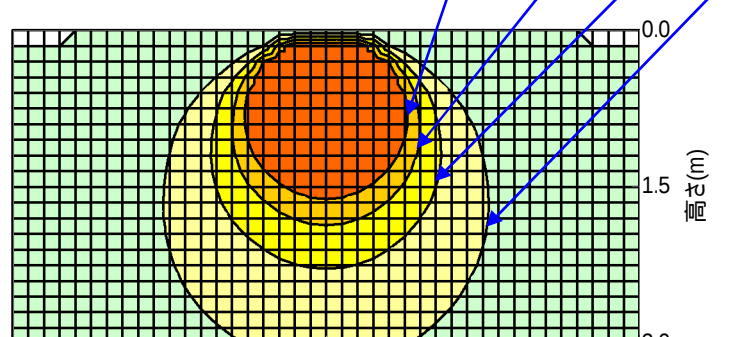
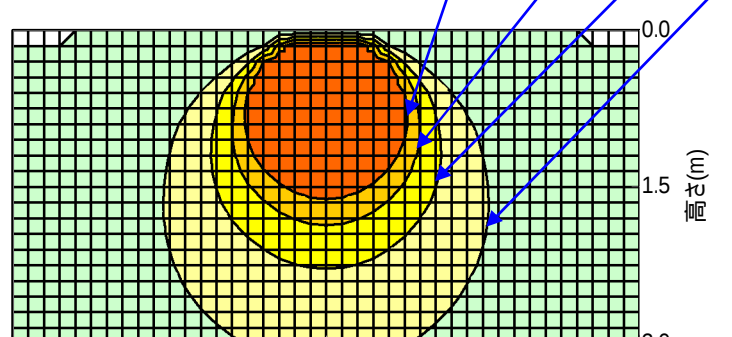
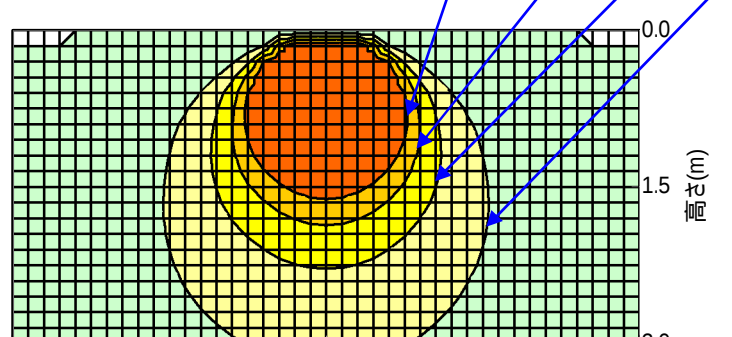
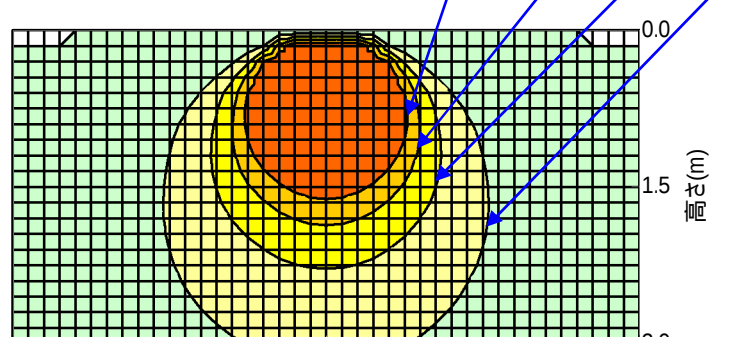
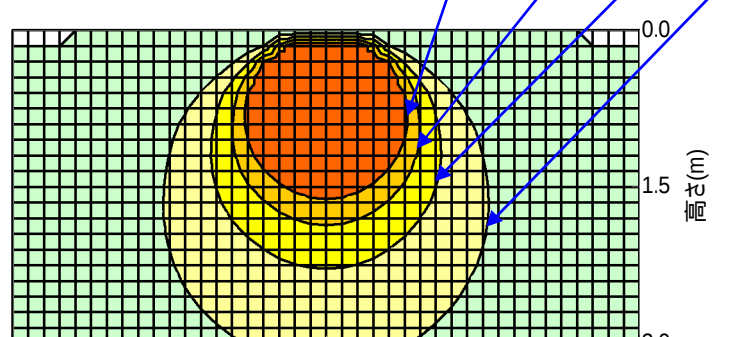
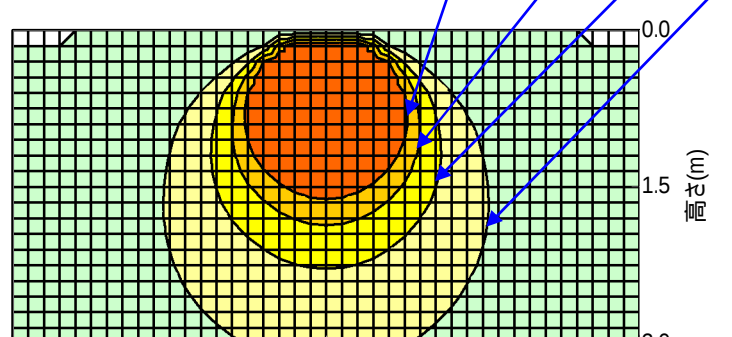
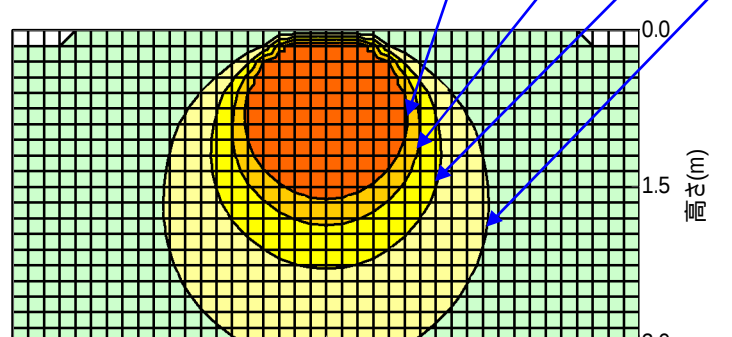
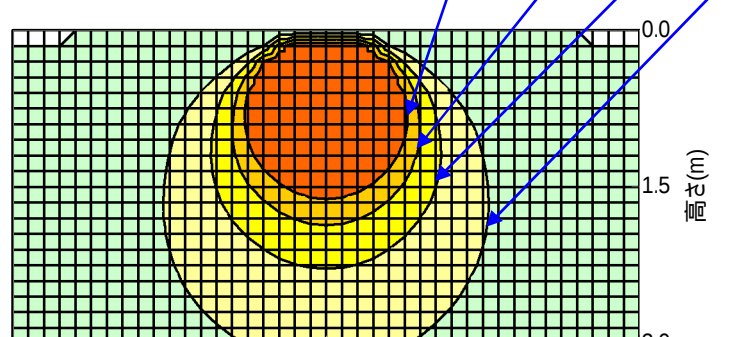
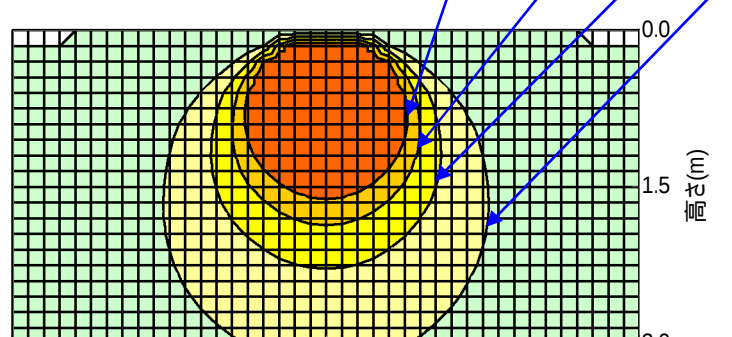
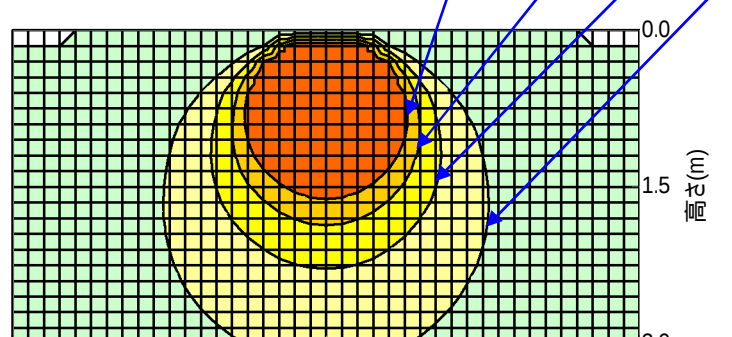
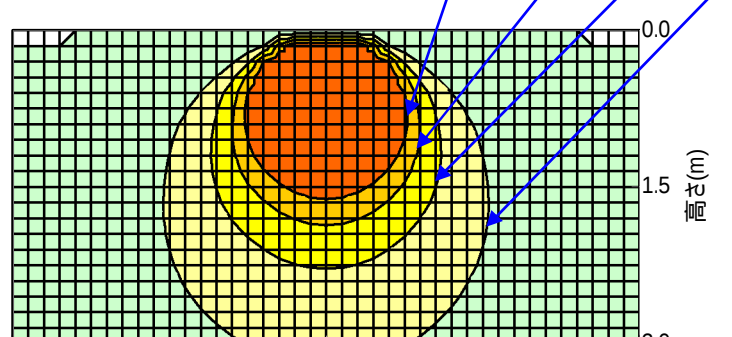
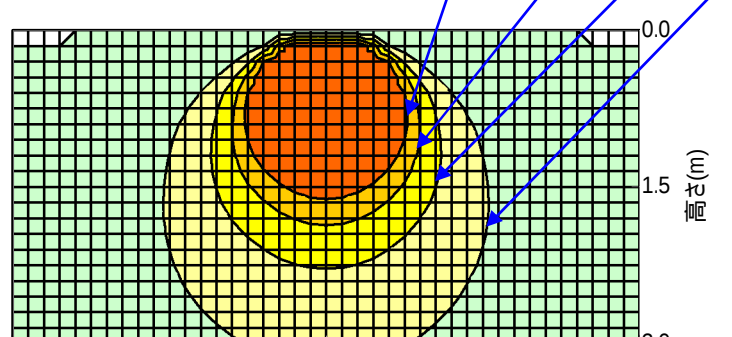
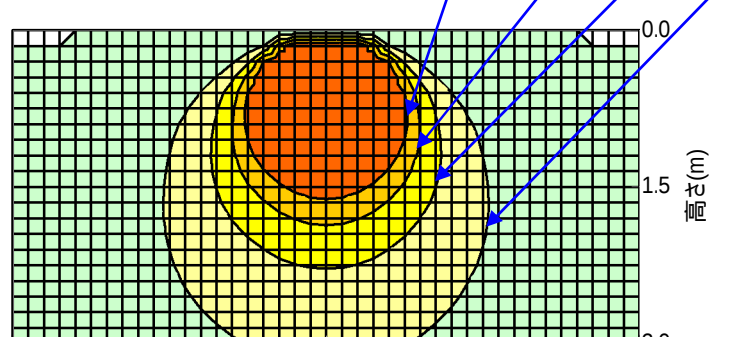
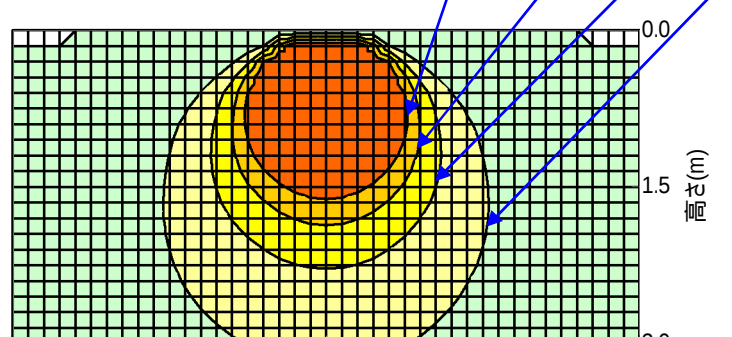
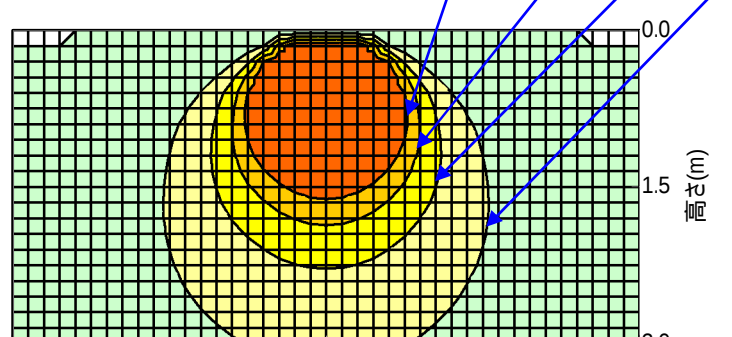
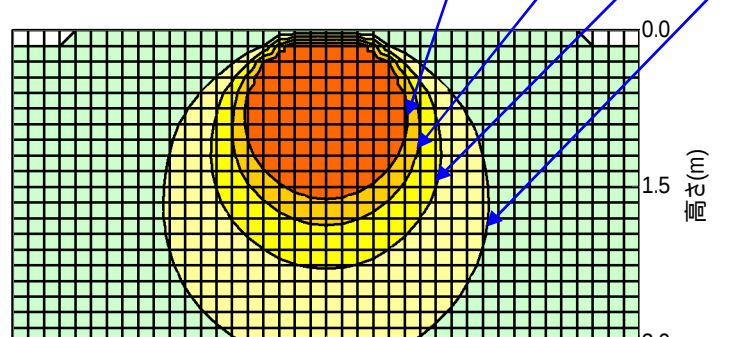
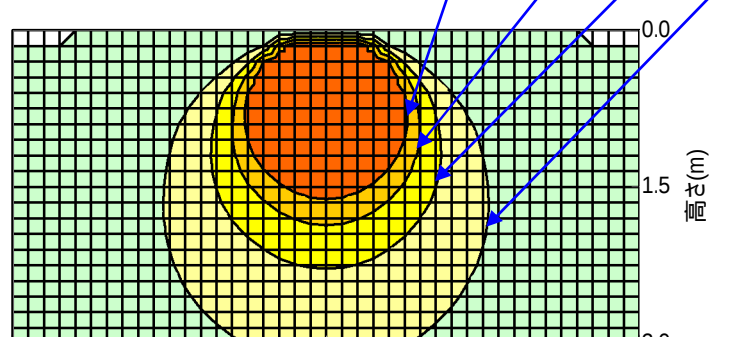
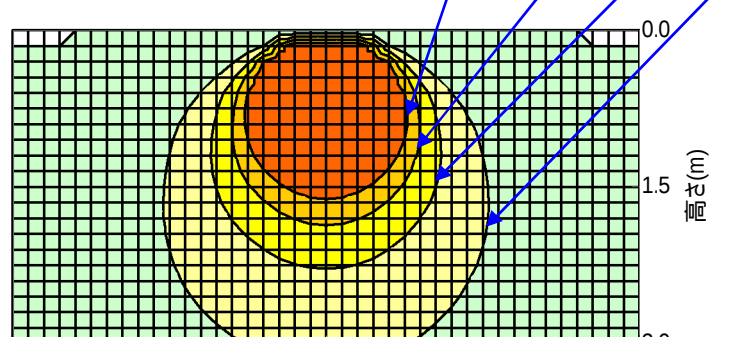
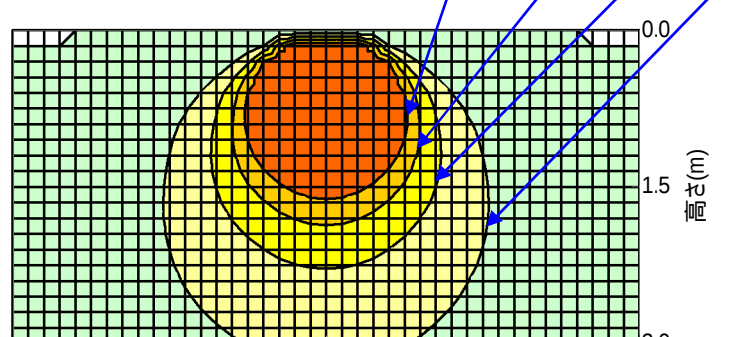
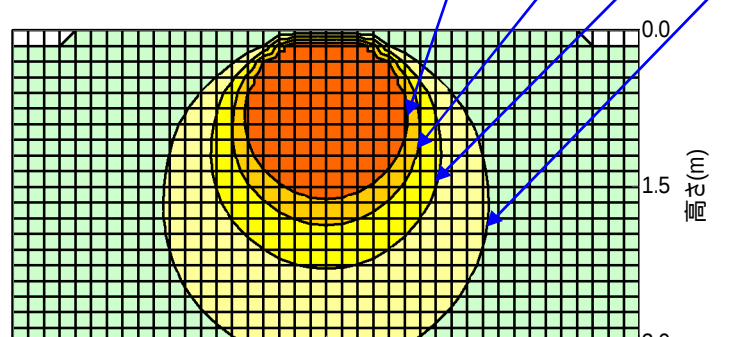
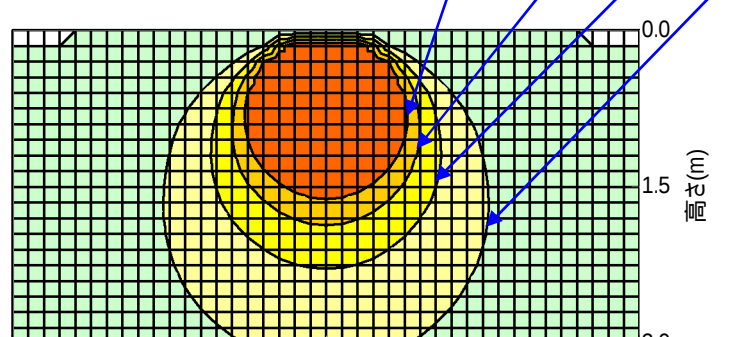
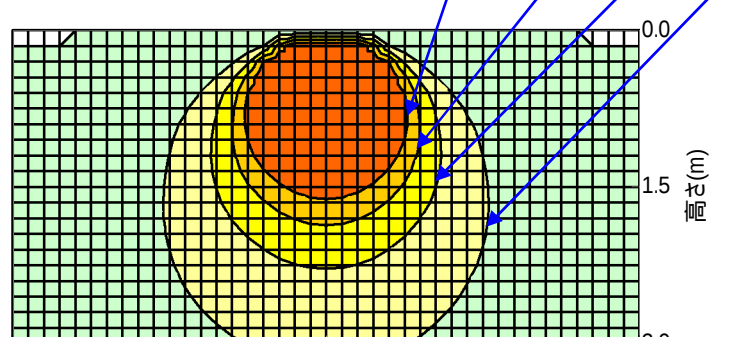
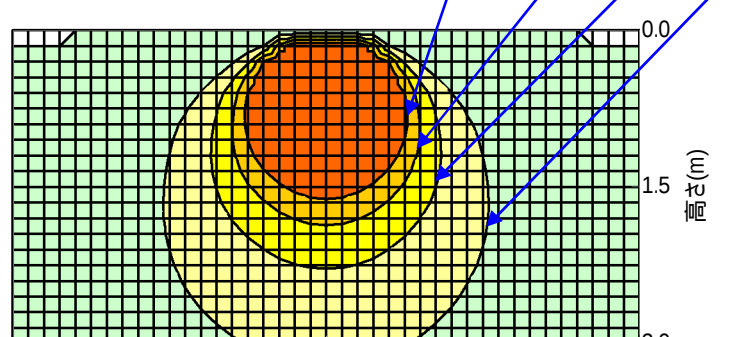
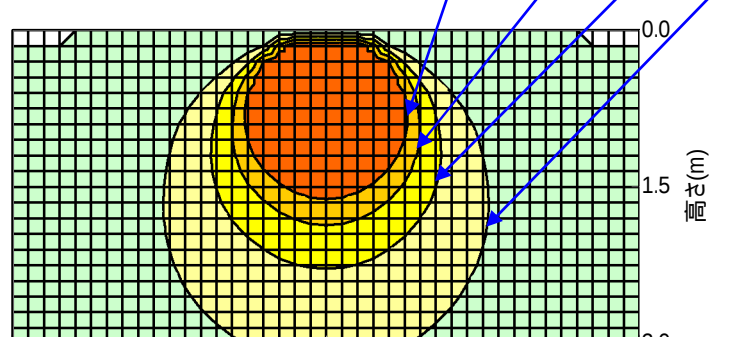
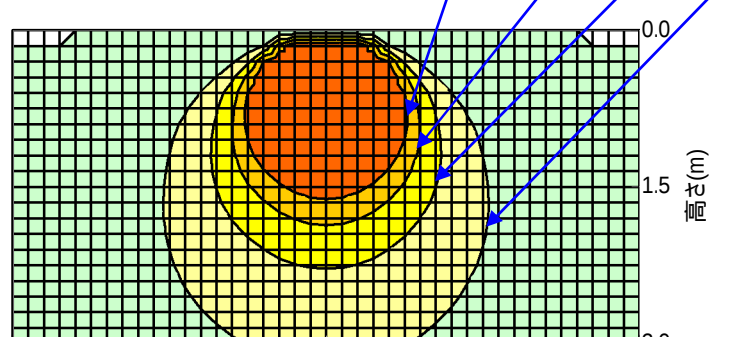
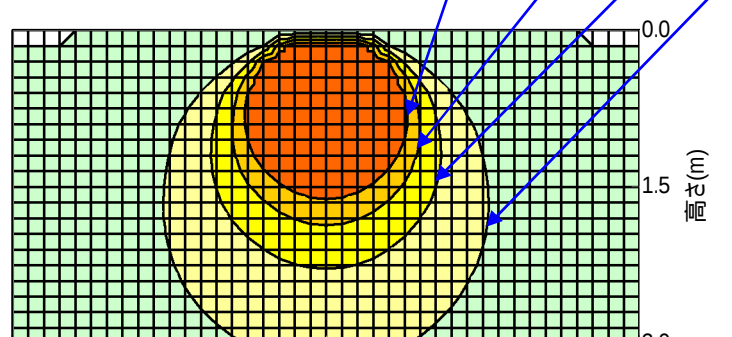
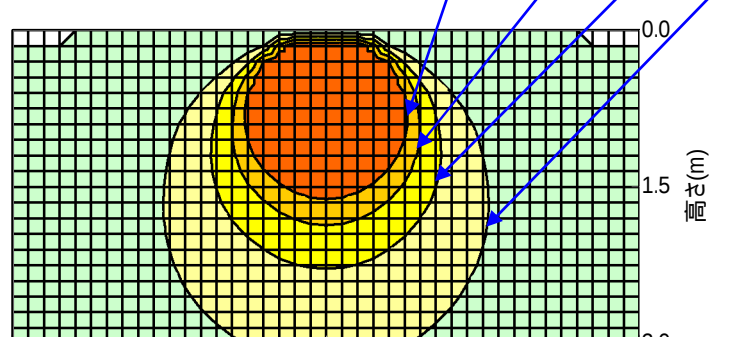
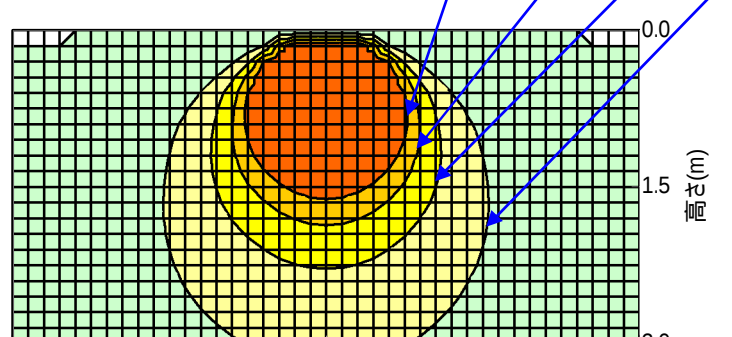
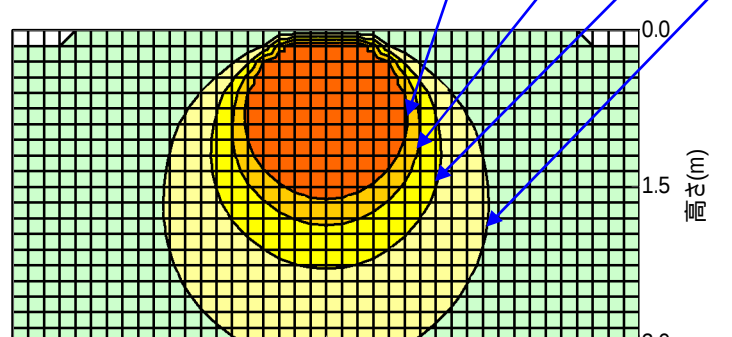


日立照明器具 照明特性

形式：TPE32401N-JZU14 <高出力タイプ> <昼白色相当> <照度補正、連続調光共用形>		天井	80%			70%				50%			30%			0%	
		壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%	
		床	10%														0%
		室指数	照明率 S/H=1.0														
	姿図	0.6	0.59	0.47	0.39	0.57	0.46	0.39	0.34	0.45	0.38	0.33	0.44	0.38	0.33	0.31	
	0.8	0.68	0.57	0.49	0.67	0.56	0.49	0.43	0.55	0.48	0.43	0.53	0.48	0.43	0.41		
	1	0.75	0.64	0.56	0.73	0.63	0.56	0.51	0.62	0.55	0.50	0.60	0.54	0.50	0.48		
	1.25	0.80	0.71	0.64	0.79	0.70	0.63	0.58	0.68	0.62	0.58	0.67	0.61	0.57	0.55		
	1.5	0.85	0.76	0.70	0.83	0.75	0.69	0.64	0.73	0.68	0.63	0.72	0.67	0.63	0.61		
	2	0.91	0.83	0.78	0.89	0.82	0.77	0.72	0.80	0.76	0.72	0.78	0.74	0.71	0.68		
	2.5	0.94	0.88	0.83	0.92	0.87	0.82	0.78	0.85	0.80	0.77	0.83	0.79	0.76	0.73		
	3	0.96	0.91	0.86	0.95	0.90	0.85	0.82	0.87	0.84	0.80	0.85	0.82	0.79	0.77		
光源		4	0.99	0.95	0.91	0.98	0.94	0.90	0.87	0.91	0.88	0.86	0.89	0.87	0.84	0.82	
品名	LED	5	1.01	0.98	0.94	1.00	0.96	0.93	0.91	0.94	0.92	0.89	0.92	0.90	0.88	0.85	
形式		7	1.03	1.01	0.99	1.02	1.00	0.98	0.96	0.98	0.96	0.94	0.95	0.94	0.92	0.90	
光束	5,870 lm	10	1.05	1.04	1.02	1.04	1.02	1.01	0.99	1.00	0.99	0.98	0.98	0.97	0.96	0.93	

器具効率 Ft= 100.0%										
上方光束 Fu= 0.0%										
下方光束 Fd= 100.0%										
配光分類										
BZ-										
最大取付間隔										
A-A 1.28 H										
B-B 1.26 H										
保守率	良	0.77								
	中	0.72								
	否	0.68								
光度 (cd/1000 lm)										
	A-0	B-B	C-0	A'-0	C'-0					
0	354	354	354							
10	348	348	347							
20	328	327	328							
30	303	297	297							
40	260	257	258							
50	208	205	208							
60	162	158	153							
70	96	95	98							
80	34	34	34							
90										
100										
110										
120										
130										
140										
150										
160										
170										
180										

単位照度分布(初期)			
			
			
			
			
			
			
			
			
			
			
			
			
			
			
			
			
			
			
			
			
			
			
			
			
			
			
			
			
			
			
			
			
			
			
			
			
			
			
			
			
			
			
			
			
			
			
			
			
			
			
			
			
			
			
			
			
			
			
			
			
			
			
			
			
			
			
			
			
			
			
			
			
			
			
			
			
			
			
			
			
		<	