
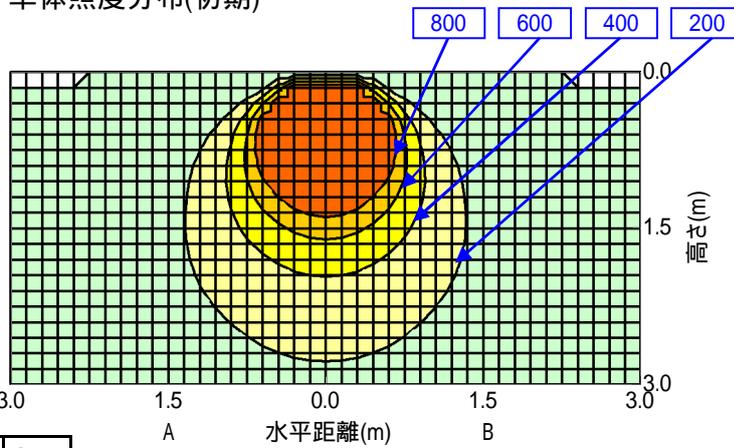
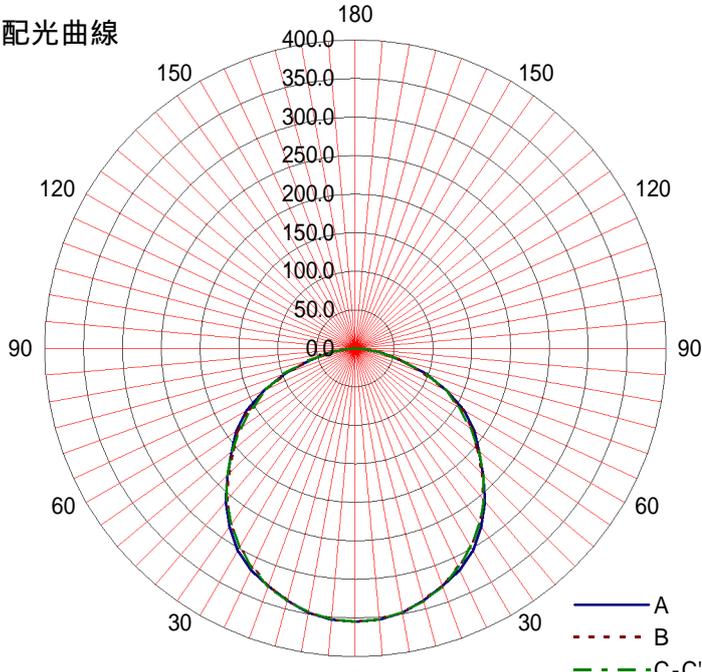


日立照明器具 照明特性

形式: TPE32401W-JZ14 <定格出力タイプ> <白色相当> <照度補正、連続調光共用形>	反射率	天井	80%			70%				50%			30%			0%																																																																																																																							
		壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%																																																																																																																							
		床	10%														0%																																																																																																																						
室指数		照明率 S/H=1.0																																																																																																																																					
	0.6	0.59	0.47	0.39	0.57	0.46	0.39	0.34	0.45	0.38	0.33	0.44	0.38	0.33	0.31																																																																																																																								
	0.8	0.68	0.57	0.49	0.67	0.56	0.49	0.43	0.55	0.48	0.43	0.53	0.48	0.43	0.41																																																																																																																								
	1	0.75	0.64	0.56	0.73	0.63	0.56	0.51	0.62	0.55	0.50	0.60	0.54	0.50	0.48																																																																																																																								
	1.25	0.80	0.71	0.64	0.79	0.70	0.63	0.58	0.68	0.62	0.58	0.67	0.61	0.57	0.55																																																																																																																								
	1.5	0.85	0.76	0.70	0.83	0.75	0.69	0.64	0.73	0.68	0.63	0.72	0.67	0.63	0.61																																																																																																																								
	2	0.91	0.83	0.78	0.89	0.82	0.77	0.72	0.80	0.76	0.72	0.78	0.74	0.71	0.68																																																																																																																								
	2.5	0.94	0.88	0.83	0.92	0.87	0.82	0.78	0.85	0.80	0.77	0.83	0.79	0.76	0.73																																																																																																																								
	3	0.96	0.91	0.86	0.95	0.90	0.85	0.82	0.87	0.84	0.80	0.85	0.82	0.79	0.77																																																																																																																								
	4	0.99	0.95	0.91	0.98	0.94	0.90	0.87	0.91	0.88	0.86	0.89	0.87	0.84	0.82																																																																																																																								
	光源	5	1.01	0.98	0.94	1.00	0.96	0.93	0.91	0.94	0.92	0.89	0.92	0.90	0.88	0.85																																																																																																																							
品名	LED	7	1.03	1.01	0.99	1.02	1.00	0.98	0.96	0.98	0.96	0.94	0.95	0.94	0.92																																																																																																																								
形式		10	1.05	1.04	1.02	1.04	1.02	1.01	0.99	1.00	0.99	0.98	0.98	0.97	0.96																																																																																																																								
光束	4,340 lm																																																																																																																																						
器具効率 Ft= 100.0%		単体照度分布(初期) 																																																																																																																																					
上方光束 Fu= 0.0%																																																																																																																																							
下方光束 Fd= 100.0%																																																																																																																																							
配光分類																																																																																																																																							
BZ-																																																																																																																																							
最大取付間隔																																																																																																																																							
A-A 1.28 H																																																																																																																																							
B-B 1.26 H																																																																																																																																							
保守率	良	0.77																																																																																																																																					
	中	0.72																																																																																																																																					
	否	0.68																																																																																																																																					
光度 (cd/1000 lm)		<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th></th> <th>A-0</th> <th>B-B</th> <th>C-0</th> <th>A'-0</th> <th>C'-0</th> </tr> </thead> <tbody> <tr><td>0</td><td>354</td><td>354</td><td>354</td><td></td><td></td></tr> <tr><td>10</td><td>348</td><td>348</td><td>347</td><td></td><td></td></tr> <tr><td>20</td><td>328</td><td>327</td><td>328</td><td></td><td></td></tr> <tr><td>30</td><td>303</td><td>297</td><td>297</td><td></td><td></td></tr> <tr><td>40</td><td>260</td><td>257</td><td>258</td><td></td><td></td></tr> <tr><td>50</td><td>208</td><td>205</td><td>208</td><td></td><td></td></tr> <tr><td>60</td><td>162</td><td>158</td><td>153</td><td></td><td></td></tr> <tr><td>70</td><td>96</td><td>95</td><td>98</td><td></td><td></td></tr> <tr><td>80</td><td>34</td><td>34</td><td>34</td><td></td><td></td></tr> <tr><td>90</td><td></td><td></td><td></td><td></td><td></td></tr> <tr><td>100</td><td></td><td></td><td></td><td></td><td></td></tr> <tr><td>110</td><td></td><td></td><td></td><td></td><td></td></tr> <tr><td>120</td><td></td><td></td><td></td><td></td><td></td></tr> <tr><td>130</td><td></td><td></td><td></td><td></td><td></td></tr> <tr><td>140</td><td></td><td></td><td></td><td></td><td></td></tr> <tr><td>150</td><td></td><td></td><td></td><td></td><td></td></tr> <tr><td>160</td><td></td><td></td><td></td><td></td><td></td></tr> <tr><td>170</td><td></td><td></td><td></td><td></td><td></td></tr> <tr><td>180</td><td></td><td></td><td></td><td></td><td></td></tr> </tbody> </table>															A-0	B-B	C-0	A'-0	C'-0	0	354	354	354			10	348	348	347			20	328	327	328			30	303	297	297			40	260	257	258			50	208	205	208			60	162	158	153			70	96	95	98			80	34	34	34			90						100						110						120						130						140						150						160						170						180					
	A-0	B-B	C-0	A'-0	C'-0																																																																																																																																		
0	354	354	354																																																																																																																																				
10	348	348	347																																																																																																																																				
20	328	327	328																																																																																																																																				
30	303	297	297																																																																																																																																				
40	260	257	258																																																																																																																																				
50	208	205	208																																																																																																																																				
60	162	158	153																																																																																																																																				
70	96	95	98																																																																																																																																				
80	34	34	34																																																																																																																																				
90																																																																																																																																							
100																																																																																																																																							
110																																																																																																																																							
120																																																																																																																																							
130																																																																																																																																							
140																																																																																																																																							
150																																																																																																																																							
160																																																																																																																																							
170																																																																																																																																							
180																																																																																																																																							