



# 日立照明器具 照明特性

| 形式：TPE32401WW-JZ14A                                                                             |          | 反<br>射<br>率 | 天井   | 80%         |      |      | 70%  |      |      |      | 50%  |      |      | 30%  |      |      | 0%   |  |    |
|-------------------------------------------------------------------------------------------------|----------|-------------|------|-------------|------|------|------|------|------|------|------|------|------|------|------|------|------|--|----|
| <定格出力タイプ>                                                                                       |          |             | 壁    | 70%         | 50%  | 30%  | 70%  | 50%  | 30%  | 10%  | 50%  | 30%  | 10%  | 50%  | 30%  | 10%  | 0%   |  |    |
| <温白色相当>                                                                                         |          |             | 床    | 10%         |      |      |      |      |      |      |      |      |      |      |      |      |      |  | 0% |
| <初期照度補正、連続調光共用形>                                                                                |          |             | 室指数  | 照明率 S/H=1.0 |      |      |      |      |      |      |      |      |      |      |      |      |      |  |    |
| <div>姿図</div>  |          |             | 0.6  | 0.59        | 0.47 | 0.39 | 0.57 | 0.46 | 0.39 | 0.34 | 0.45 | 0.38 | 0.33 | 0.44 | 0.38 | 0.33 | 0.31 |  |    |
|                                                                                                 |          |             | 0.8  | 0.68        | 0.57 | 0.49 | 0.67 | 0.56 | 0.49 | 0.43 | 0.55 | 0.48 | 0.43 | 0.53 | 0.48 | 0.43 | 0.41 |  |    |
|                                                                                                 |          |             | 1    | 0.75        | 0.64 | 0.56 | 0.73 | 0.63 | 0.56 | 0.51 | 0.62 | 0.55 | 0.50 | 0.60 | 0.54 | 0.50 | 0.48 |  |    |
|                                                                                                 |          |             | 1.25 | 0.80        | 0.71 | 0.64 | 0.79 | 0.70 | 0.63 | 0.58 | 0.68 | 0.62 | 0.58 | 0.67 | 0.61 | 0.57 | 0.55 |  |    |
|                                                                                                 |          |             | 1.5  | 0.85        | 0.76 | 0.70 | 0.83 | 0.75 | 0.69 | 0.64 | 0.73 | 0.68 | 0.63 | 0.72 | 0.67 | 0.63 | 0.61 |  |    |
|                                                                                                 |          |             | 2    | 0.91        | 0.83 | 0.78 | 0.89 | 0.82 | 0.77 | 0.72 | 0.80 | 0.76 | 0.72 | 0.78 | 0.74 | 0.71 | 0.68 |  |    |
|                                                                                                 |          |             | 2.5  | 0.94        | 0.88 | 0.83 | 0.92 | 0.87 | 0.82 | 0.78 | 0.85 | 0.80 | 0.77 | 0.83 | 0.79 | 0.76 | 0.73 |  |    |
|                                                                                                 |          |             | 3    | 0.96        | 0.91 | 0.86 | 0.95 | 0.90 | 0.85 | 0.82 | 0.87 | 0.84 | 0.80 | 0.85 | 0.82 | 0.79 | 0.77 |  |    |
| 光源                                                                                              |          |             | 4    | 0.99        | 0.95 | 0.91 | 0.98 | 0.94 | 0.90 | 0.87 | 0.91 | 0.88 | 0.86 | 0.89 | 0.87 | 0.84 | 0.82 |  |    |
| 品名                                                                                              | LED      | 5           | 1.01 | 0.98        | 0.94 | 1.00 | 0.96 | 0.93 | 0.91 | 0.94 | 0.92 | 0.89 | 0.92 | 0.90 | 0.88 | 0.85 |      |  |    |
| 形式                                                                                              |          | 7           | 1.03 | 1.01        | 0.99 | 1.02 | 1.00 | 0.98 | 0.96 | 0.98 | 0.96 | 0.94 | 0.95 | 0.94 | 0.92 | 0.90 |      |  |    |
| 光束                                                                                              | 4,230 lm | 10          | 1.05 | 1.04        | 1.02 | 1.04 | 1.02 | 1.01 | 0.99 | 1.00 | 0.99 | 0.98 | 0.98 | 0.97 | 0.96 | 0.93 |      |  |    |

|                 |      |      |
|-----------------|------|------|
| 器具効率 Ft= 100.0% |      |      |
| 上方光束 Fu= 0.0%   |      |      |
| 下方光束 Fd= 100.0% |      |      |
| 配光分類            |      |      |
| BZ-             |      |      |
| 最大取付間隔          |      |      |
| A-A             | 1.28 | H    |
| B-B             | 1.26 | H    |
| 保守率             | 良    | 0.81 |
|                 | 中    | 0.77 |
|                 | 否    | 0.72 |

単体照度分布(初期)

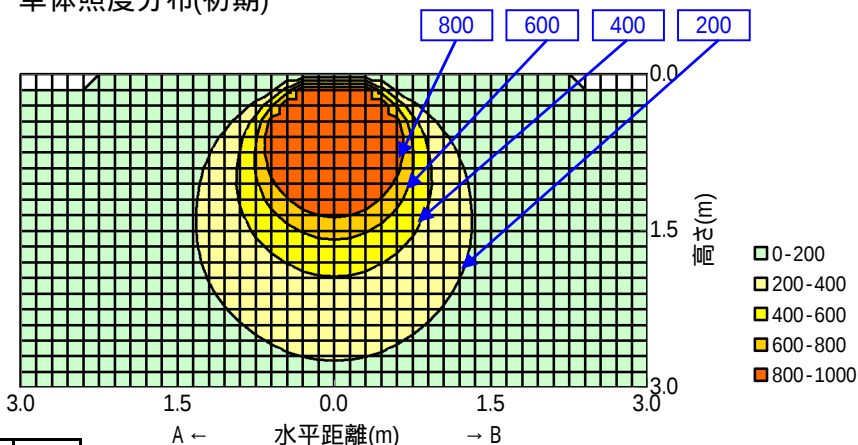

| 光度 (cd/1000 lm) |     |     |     |      |      |
|-----------------|-----|-----|-----|------|------|
|                 | A-0 | B-B | C-0 | A'-0 | C'-0 |
| 0               | 354 | 354 | 354 |      |      |
| 10              | 348 | 348 | 347 |      |      |
| 20              | 328 | 327 | 328 |      |      |
| 30              | 303 | 297 | 297 |      |      |
| 40              | 260 | 257 | 258 |      |      |
| 50              | 208 | 205 | 208 |      |      |
| 60              | 162 | 158 | 153 |      |      |
| 70              | 96  | 95  | 98  |      |      |
| 80              | 34  | 34  | 34  |      |      |
| 90              |     |     |     |      |      |
| 100             |     |     |     |      |      |
| 110             |     |     |     |      |      |
| 120             |     |     |     |      |      |
| 130             |     |     |     |      |      |
| 140             |     |     |     |      |      |
| 150             |     |     |     |      |      |
| 160             |     |     |     |      |      |
| 170             |     |     |     |      |      |
| 180             |     |     |     |      |      |

配光曲線

