


## 日立照明器具 照明特性

|                                                               |  |     |     |             |     |     |     |     |     |     |     |     |     |     |     |     |    |    |
|---------------------------------------------------------------|--|-----|-----|-------------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|----|----|
| 形式: TPE32401WW-JZU14<br><高出力タイプ><br><温白色相当><br><照度補正、連続調光共用形> |  | 天井  | 80% |             |     | 70% |     |     |     | 50% |     |     | 30% |     |     | 0%  |    |    |
|                                                               |  |     | 壁   | 70%         | 50% | 30% | 70% | 50% | 30% | 10% | 50% | 30% | 10% | 50% | 30% | 10% | 0% |    |
|                                                               |  | 反射率 | 床   | 10%         |     |     |     |     |     |     |     |     |     |     |     |     |    | 0% |
|                                                               |  |     | 室指数 | 照明率 S/H=1.0 |     |     |     |     |     |     |     |     |     |     |     |     |    |    |

|                                                                                                            |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |
|------------------------------------------------------------------------------------------------------------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|
| <div>姿図</div> <div></div> | 0.6  | 0.59 | 0.47 | 0.39 | 0.57 | 0.46 | 0.39 | 0.34 | 0.45 | 0.38 | 0.33 | 0.44 | 0.38 | 0.33 | 0.31 |
|                                                                                                            | 0.8  | 0.68 | 0.57 | 0.49 | 0.67 | 0.56 | 0.49 | 0.43 | 0.55 | 0.48 | 0.43 | 0.53 | 0.48 | 0.43 | 0.41 |
|                                                                                                            | 1    | 0.75 | 0.64 | 0.56 | 0.73 | 0.63 | 0.56 | 0.51 | 0.62 | 0.55 | 0.50 | 0.60 | 0.54 | 0.50 | 0.48 |
|                                                                                                            | 1.25 | 0.80 | 0.71 | 0.64 | 0.79 | 0.70 | 0.63 | 0.58 | 0.68 | 0.62 | 0.58 | 0.67 | 0.61 | 0.57 | 0.55 |
|                                                                                                            | 1.5  | 0.85 | 0.76 | 0.70 | 0.83 | 0.75 | 0.69 | 0.64 | 0.73 | 0.68 | 0.63 | 0.72 | 0.67 | 0.63 | 0.61 |
|                                                                                                            | 2    | 0.91 | 0.83 | 0.78 | 0.89 | 0.82 | 0.77 | 0.72 | 0.80 | 0.76 | 0.72 | 0.78 | 0.74 | 0.71 | 0.68 |
|                                                                                                            | 2.5  | 0.94 | 0.88 | 0.83 | 0.92 | 0.87 | 0.82 | 0.78 | 0.85 | 0.80 | 0.77 | 0.83 | 0.79 | 0.76 | 0.73 |
|                                                                                                            | 3    | 0.96 | 0.91 | 0.86 | 0.95 | 0.90 | 0.85 | 0.82 | 0.87 | 0.84 | 0.80 | 0.85 | 0.82 | 0.79 | 0.77 |
|                                                                                                            | 4    | 0.99 | 0.95 | 0.91 | 0.98 | 0.94 | 0.90 | 0.87 | 0.91 | 0.88 | 0.86 | 0.89 | 0.87 | 0.84 | 0.82 |

|    |          |      |      |      |      |      |      |      |      |      |      |      |      |      |      |
|----|----------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|
| 光源 | 4        | 0.99 | 0.95 | 0.91 | 0.98 | 0.94 | 0.90 | 0.87 | 0.91 | 0.88 | 0.86 | 0.89 | 0.87 | 0.84 | 0.82 |
| 品名 | LED      | 5    | 1.01 | 0.98 | 0.94 | 1.00 | 0.96 | 0.93 | 0.91 | 0.94 | 0.92 | 0.89 | 0.92 | 0.90 | 0.88 |
| 形式 |          | 7    | 1.03 | 1.01 | 0.99 | 1.02 | 1.00 | 0.98 | 0.96 | 0.98 | 0.96 | 0.94 | 0.95 | 0.94 | 0.92 |
| 光束 | 5,490 lm | 10   | 1.05 | 1.04 | 1.02 | 1.04 | 1.02 | 1.01 | 0.99 | 1.00 | 0.99 | 0.98 | 0.98 | 0.97 | 0.96 |

|                 |     |      |     |      |      |
|-----------------|-----|------|-----|------|------|
| 器具効率 Ft= 100.0% |     |      |     |      |      |
| 上方光束 Fu= 0.0%   |     |      |     |      |      |
| 下方光束 Fd= 100.0% |     |      |     |      |      |
| 配光分類            |     |      |     |      |      |
| BZ-             |     |      |     |      |      |
| 最大取付間隔          |     |      |     |      |      |
| A-A 1.28 H      |     |      |     |      |      |
| B-B 1.26 H      |     |      |     |      |      |
| 保守率             | 良   | 0.77 |     |      |      |
|                 | 中   | 0.72 |     |      |      |
|                 | 否   | 0.68 |     |      |      |
| 光度 (cd/1000 lm) |     |      |     |      |      |
|                 | A-0 | B-B  | C-0 | A'-0 | C'-0 |
| 0               | 354 | 354  | 354 |      |      |
| 10              | 348 | 348  | 347 |      |      |
| 20              | 328 | 327  | 328 |      |      |
| 30              | 303 | 297  | 297 |      |      |
| 40              | 260 | 257  | 258 |      |      |
| 50              | 208 | 205  | 208 |      |      |
| 60              | 162 | 158  | 153 |      |      |
| 70              | 96  | 95   | 98  |      |      |
| 80              | 34  | 34   | 34  |      |      |
| 90              |     |      |     |      |      |
| 100             |     |      |     |      |      |
| 110             |     |      |     |      |      |
| 120             |     |      |     |      |      |
| 130             |     |      |     |      |      |
| 140             |     |      |     |      |      |
| 150             |     |      |     |      |      |
| 160             |     |      |     |      |      |
| 170             |     |      |     |      |      |
| 180             |     |      |     |      |      |


単体照度分布(初期)

800

600

400

200

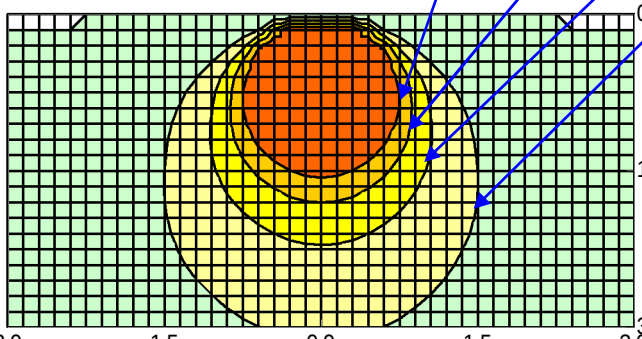

0-200  
200-400  
400-600  
600-800  
800-1000

配光曲線

180

150

120

90

60

30

0


30

60

90


120

150

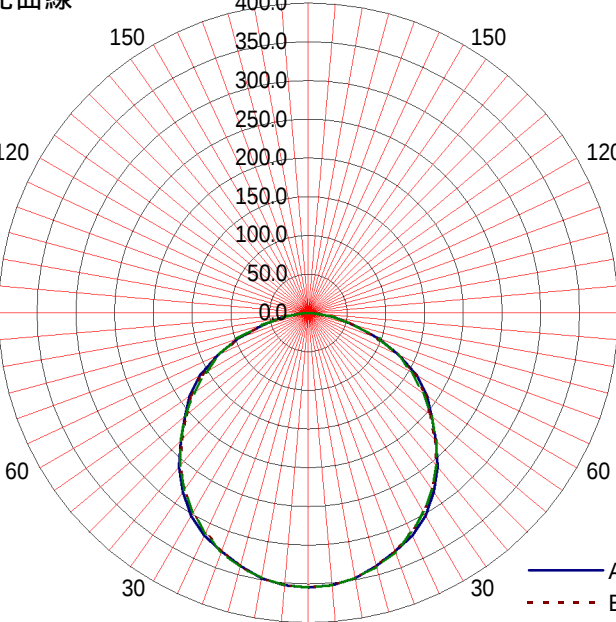

A  
B  
C-C'

単体照度分布(初期)

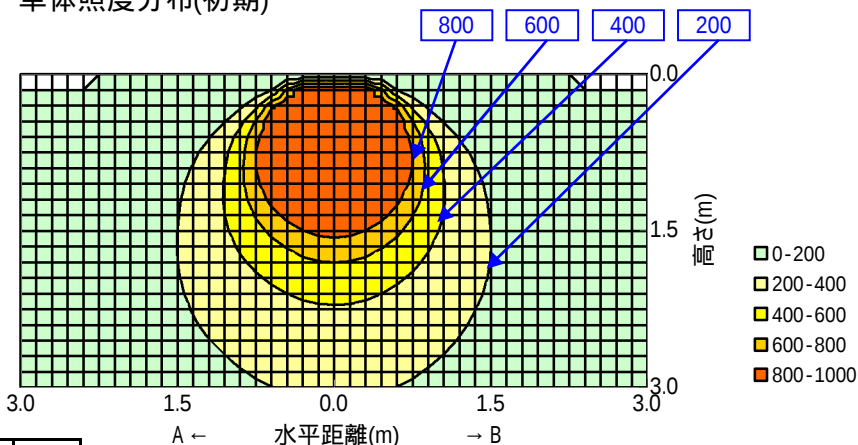

配光曲線

