
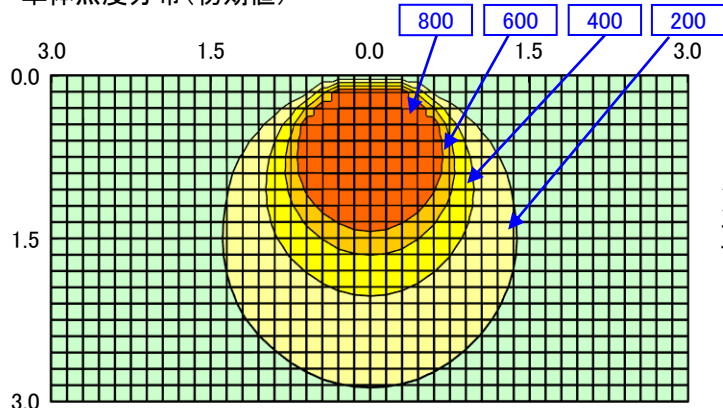
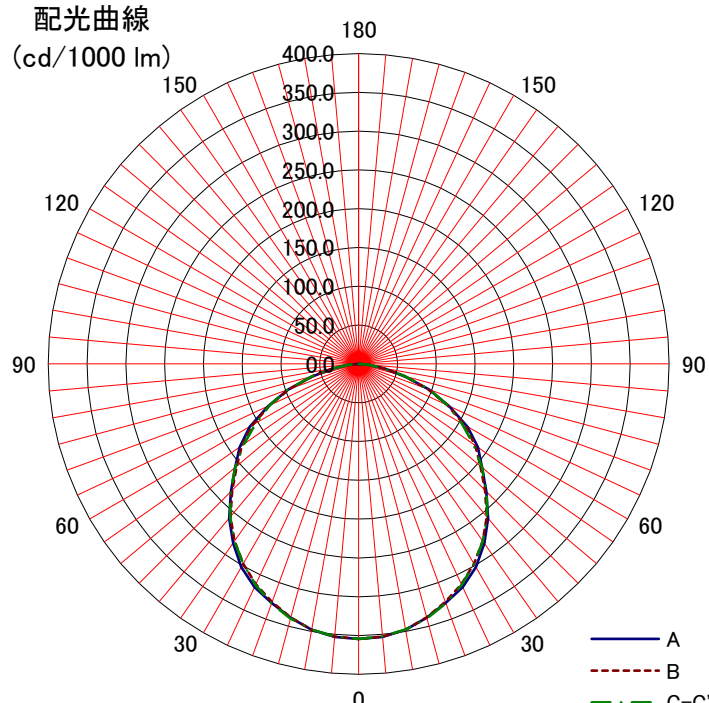


日立照明器具 照明特性																
名称: 一体形LEDベース (スクエアタイプ)	反 射 率	天井	80%			70%				50%			30%			0%
		壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%
		床	10%													0%
形式: TPE324AD-JZ14A	室指数	固有照明率 S/H=1.0														
<備考>	0.6	0.59	0.47	0.39	0.57	0.46	0.39	0.34	0.45	0.38	0.33	0.44	0.38	0.33	0.31	
	0.8	0.68	0.57	0.49	0.67	0.56	0.49	0.43	0.55	0.48	0.43	0.53	0.48	0.43	0.41	
姿図 	1	0.75	0.64	0.56	0.73	0.63	0.56	0.51	0.62	0.55	0.50	0.60	0.54	0.50	0.48	
	1.25	0.80	0.71	0.64	0.79	0.70	0.63	0.58	0.68	0.62	0.58	0.67	0.61	0.57	0.55	
	1.5	0.85	0.76	0.70	0.83	0.75	0.69	0.64	0.73	0.68	0.63	0.72	0.67	0.63	0.61	
	2	0.91	0.83	0.78	0.89	0.82	0.77	0.72	0.80	0.76	0.72	0.78	0.74	0.71	0.68	
	2.5	0.94	0.88	0.83	0.92	0.87	0.82	0.78	0.85	0.80	0.77	0.83	0.79	0.76	0.73	
	3	0.96	0.91	0.86	0.95	0.90	0.85	0.82	0.87	0.84	0.80	0.85	0.82	0.79	0.77	
光源形式	4	0.99	0.95	0.91	0.98	0.94	0.90	0.87	0.91	0.88	0.86	0.89	0.87	0.84	0.82	
-	5	1.01	0.98	0.94	1.00	0.96	0.93	0.91	0.94	0.92	0.89	0.92	0.90	0.88	0.85	
器具光束	7	1.03	1.01	0.99	1.02	1.00	0.98	0.96	0.98	0.96	0.94	0.95	0.94	0.92	0.90	
4,650 lm	10	1.05	1.04	1.02	1.04	1.02	1.01	0.99	1.00	0.99	0.98	0.98	0.97	0.96	0.93	
器具効率 Ft= 100%		単体照度分布(初期値)  0-200 200-400 400-600 600-800 800-1000														
上方光束 Fu= 0%																
下方光束 Fd= 100%																
最大取付間隔		A-A 1.28 H B-B 1.26 H 保守率 良 0.81 中 0.77 否 0.72														
光度 (cd/1000 lm)		配光曲線 (cd/1000 lm)  A B C-C'														
	A-0	B-B	C-0	A'-0	C'-0											
0	354	354	354													
10	348	348	347													
20	328	327	328													
30	303	297	297													
40	260	257	258													
50	208	205	208													
60	162	158	153													
70	96	95	98													
80	34	34	34													
90																
100																
110																
120																
130																
140																
150																
160																
170																
180																