
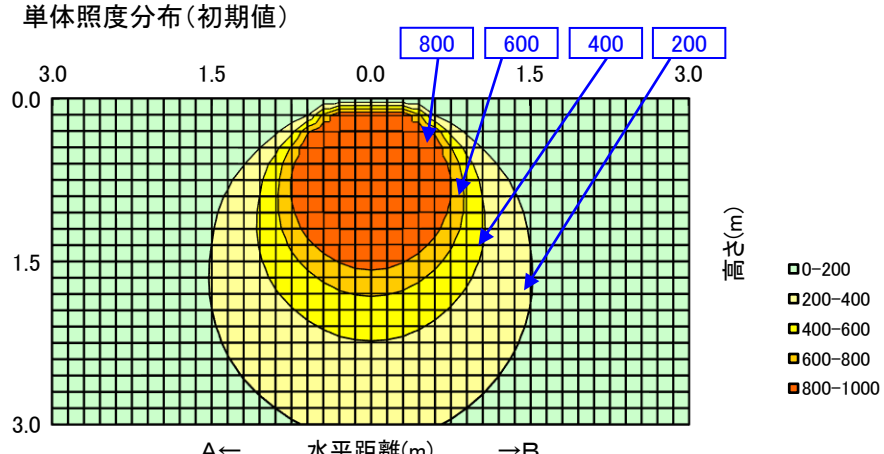
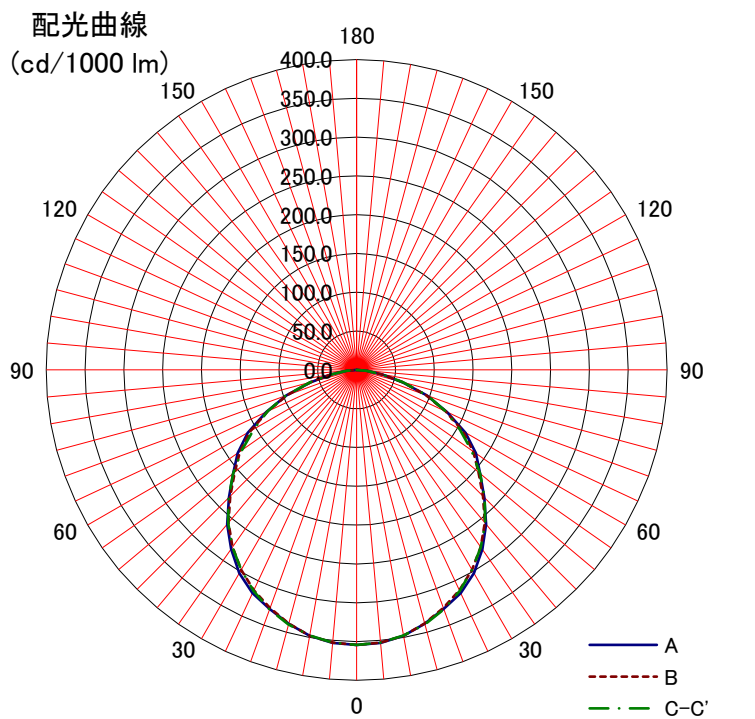


日立照明器具 照明特性

名称: 一体形LEDベース (スクエアタイプ)	反射率	天井	80%			70%				50%			30%			0%		
		壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%		
		床	10%														0%	
形式: TPE324AW-JZU14A	室指数	固有照明率 S/H=1.0																
<備考>	0.6	0.59	0.47	0.39	0.57	0.46	0.39	0.34	0.45	0.38	0.33	0.44	0.38	0.33	0.31			
	0.8	0.68	0.57	0.49	0.67	0.56	0.49	0.43	0.55	0.48	0.43	0.53	0.48	0.43	0.41			
姿図 	1	0.75	0.64	0.56	0.73	0.63	0.56	0.51	0.62	0.55	0.50	0.60	0.54	0.50	0.48			
	1.25	0.80	0.71	0.64	0.79	0.70	0.63	0.58	0.68	0.62	0.58	0.67	0.61	0.57	0.55			
	1.5	0.85	0.76	0.70	0.83	0.75	0.69	0.64	0.73	0.68	0.63	0.72	0.67	0.63	0.61			
	2	0.91	0.83	0.78	0.89	0.82	0.77	0.72	0.80	0.76	0.72	0.78	0.74	0.71	0.68			
	2.5	0.94	0.88	0.83	0.92	0.87	0.82	0.78	0.85	0.80	0.77	0.83	0.79	0.76	0.73			
	3	0.96	0.91	0.86	0.95	0.90	0.85	0.82	0.87	0.84	0.80	0.85	0.82	0.79	0.77			
光源形式	4	0.99	0.95	0.91	0.98	0.94	0.90	0.87	0.91	0.88	0.86	0.89	0.87	0.84	0.82			
-	5	1.01	0.98	0.94	1.00	0.96	0.93	0.91	0.94	0.92	0.89	0.92	0.90	0.88	0.85			
器具光束	7	1.03	1.01	0.99	1.02	1.00	0.98	0.96	0.98	0.96	0.94	0.95	0.94	0.92	0.90			
5,630 lm	10	1.05	1.04	1.02	1.04	1.02	1.01	0.99	1.00	0.99	0.98	0.98	0.97	0.96	0.93			
器具効率 Ft= 100%		単体照度分布(初期値) 																
上方光束 Fu= 0%																		
下方光束 Fd= 100%																		
最大取付間隔																		
A-A 1.28 H																		
B-B 1.26 H																		
保守率	良	0.81																
	中	0.77																
	否	0.72																
光度 (cd/1000 lm)																		
A-0	B-B															C-0	A'-0	C'-0
0	354															354	354	
10	348															348	347	
20	328															327	328	
30	303															297	297	
40	260															257	258	
50	208															205	208	
60	162															158	153	
70	96															95	98	
80	34															34	34	
90																		
100																		
110																		
120																		
130																		
140																		
150																		
160																		
170																		
180																		